
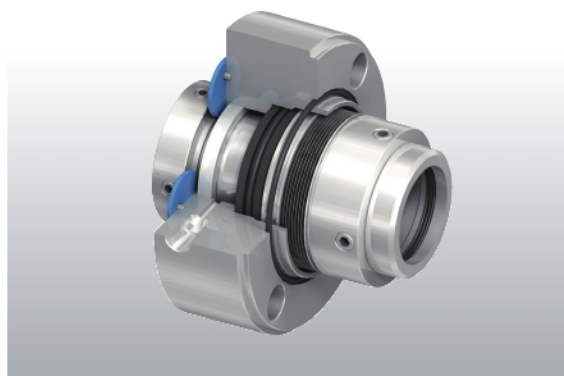


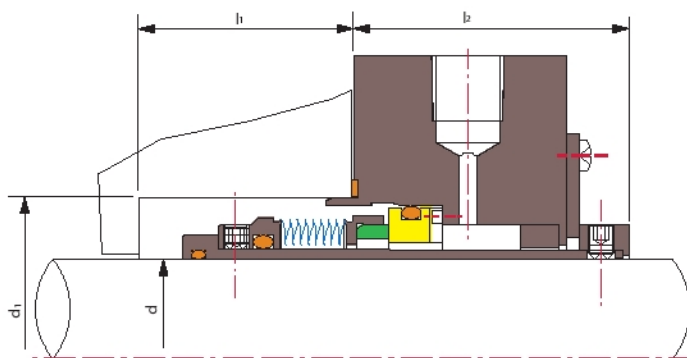

SM-1670

技术参数:

压力: $\leq 2.7\text{MPa}$
速率: $\leq 23\text{m/s}$
温度: $-30^{\circ}\text{C} \sim +204^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 2.7\text{MPa}$
Speed: $\leq 23\text{m/s}$
Temperature: $-30^{\circ}\text{C} \sim +204^{\circ}\text{C}$

- 动环(碳化硅/石墨/碳化钨)
- 静环(碳化硅/碳化钨)
- 辅助密封(氟胶/包覆圈/聚四氟乙烯)
- 金属波纹管(SUS316L/AM350/Inconel718/
钛材/哈氏C/合金20)
- 其它部件(SUS304/SUS316/钛材/哈氏-C)

- Rotary Ring(SiC/Carbon/TC)
- Stationary Ring(SiC/TC)
- Secondary Seal(VITON/Encapsulated Ring/PTFE)
- Metal Bellows(SUS316L/AM350/Inconel718
/Titanium/Hastelloy-C/Alloy-20)
- Other Parts(SUS304/SUS316/Titanium/Hastelloy-C)

d ₁ (inches)	d	l ₁	l ₂
1.625	0.750	1.437	1.937
1.687	0.812	1.468	1.968
1.750	0.875	1.468	1.968
1.875	1.000	1.406	2.000
2.000	1.125	1.281	2.312
2.125	1.250	1.375	2.312
2.250	1.375	1.531	2.343
2.562	1.437	1.625	2.375
2.687	1.562	1.937	2.500
2.812	1.687	1.968	2.500
2.937	1.812	1.937	2.531
3.187	1.937	1.906	2.656
3.312	2.062	1.906	2.656
3.437	2.187	1.906	2.718
3.562	2.250	2.062	2.718
3.562	2.375	2.062	2.718
3.687	2.500	2.125	2.875
3.937	2.625	2.062	3.000
4.062	2.750	2.062	3.000
4.250	2.875	2.156	3.156
4.375	3.000	2.156	3.156
4.500	3.125	2.156	3.156
4.625	3.250	2.156	3.156
4.875	3.500	2.156	3.156
5.187	3.750	2.156	3.375
5.500	4.000	2.156	3.406
5.750	4.250	2.156	3.406
6.250	4.750	2.250	3.406

d (mm)	d ₁	l ₁	l ₂
41.3	19.0	28.6	30.2
42.8	20.6	29.4	50.0
44.4	22.2	29.4	30.2
47.6	25.4	27.8	30.2
50.8	28.6	24.6	34.9
54.0	31.8	26.2	34.9
57.1	34.9	30.2	34.9
65.1	36.5	32.5	34.9
68.3	39.7	34.1	34.9
71.4	42.9	34.9	34.9
74.8	46.0	34.1	34.9
81.0	49.2	33.3	34.9
84.1	52.4	33.3	34.9
87.3	55.6	33.3	34.9
90.5	57.1	37.3	34.9
90.5	60.3	37.3	34.9
93.7	63.5	38.9	34.9
100.0	66.7	38.1	38.1
103.2	69.9	38.1	38.1
107.9	73.0	39.7	42.9
111.1	76.2	39.7	42.9
114.3	79.4	39.7	42.9
117.5	82.5	39.7	42.9
123.8	88.9	39.7	42.9
131.8	95.3	39.7	42.9
139.7	101.6	39.7	86.5
146.1	107.9	39.7	43.7
158.8	120.6	39.7	43.7