


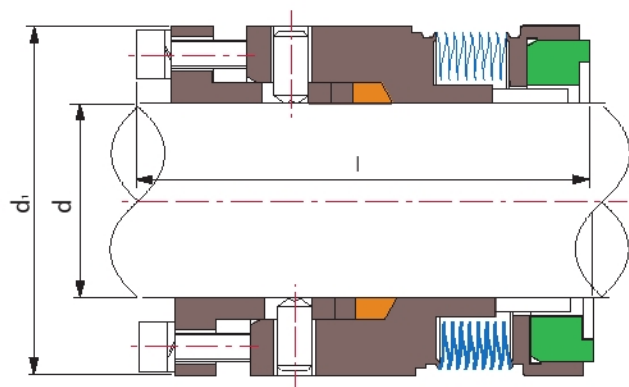

SM 606

技术参数:

压力: $\leq 2\text{MPa}$ (单层波片)
 $\leq 6.9\text{MPa}$ (双层波片)

速率: $\leq 25\text{m/s}$

温度: $-75^{\circ}\text{C} \sim +425^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 2\text{MPa}$ (single wave slice)
 $\leq 6.9\text{MPa}$ (double wave slice)

Speed: $\leq 25\text{m/s}$

Temperature: $-75^{\circ}\text{C} \sim +425^{\circ}\text{C}$

- 动环(碳化硅/石墨/碳化钨)
- 静环(碳化硅/碳化钨)
- 辅助密封(柔性石墨)
- 金属波纹管(SUS316L/AM350/Inconel718/
钛材/哈氏C/合金20)
- 其它部件(SUS304/SUS316/钛材/哈氏-C)

- Rotary Ring(SiC/Carbon/TC)
- Stationary Ring(SiC/TC)
- Secondary Seal(Flexible Carbon)
- Metal Bellows(SUS316L/AM350/Inconel718
/Titanium/Hastelloy-C/Alloy-20)
- Other Parts(SUS304/SUS316/Titanium/Hastelloy-C)

Shaft (inches)	d	d ₁	l
0.750	0.750	1.625	2.312
0.875	0.875	1.750	3.343
1.000	1.000	1.875	2.343
1.125	1.125	2.000	2.375
1.250	1.250	2.125	2.375
1.375	1.375	2.250	2.468
1.500	1.500	2.375	2.500
1.625	1.625	2.500	2.500
1.750	1.750	2.625	2.531
1.875	1.875	2.750	2.531
2.000	2.000	2.875	2.562
2.125	2.125	3.000	2.562
2.250	2.250	3.250	2.750
2.375	2.375	3.375	2.781
2.500	2.500	3.500	2.781
2.625	2.625	3.687	2.875
2.750	2.750	3.812	3.000
2.875	2.875	4.000	3.000
3.000	3.000	4.125	3.000
3.125	3.125	4.250	3.000
3.250	3.250	4.375	3.000
3.375	3.375	4.500	3.000
3.500	3.500	4.625	3.000
3.625	3.625	4.750	3.000
3.750	3.750	4.875	3.000

Shaft (mm)	d	d ₁	l
20	20	41.28	58.72
22	22	44.45	59.51
25	25	47.63	59.51
30	30	50.80	60.33
32	32	53.98	60.33
35	35	57.15	62.69
38	38	60.33	63.50
40	40	63.50	63.50
45	45	66.68	64.29
48	48	69.85	64.29
50	50	73.03	65.07
55	55	76.20	65.07
60	60	85.73	70.64
65	65	88.90	70.64
70	70	96.82	76.20
75	75	104.78	76.20
80	80	107.95	76.20
85	85	114.30	76.20
90	90	117.48	76.20
95	95	123.83	76.20
100	100	130.18	76.20