
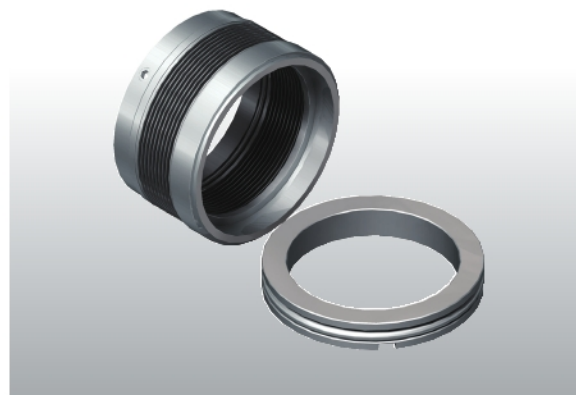


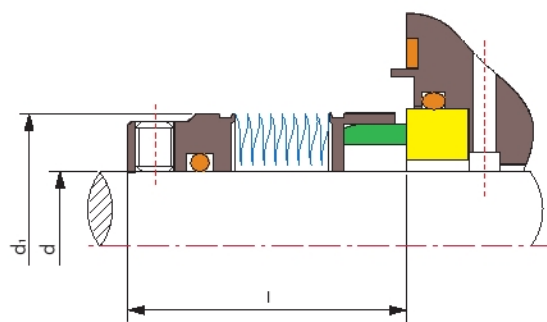

SM 676.670.680

技术参数:

压力: $\leq 2.1\text{MPa}$
速率: $\leq 25\text{m/s}$
温度: $-75^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 动环(碳化硅/石墨/碳化钨)
- 静环(碳化硅/碳化钨)
- 辅助密封(氟胶/包覆圈/聚四氟乙烯)
- 金属波纹管(SUS316L/AM350/Inconel718/
钛材/哈氏C/合金20)
- 其它部件(SUS304/SUS316/钛材/哈氏-C)

Operating Limits

Pressure: $\leq 2.1\text{MPa}$
Speed: $\leq 25\text{m/s}$
Temperature: $-75^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- Rotary Ring(SiC/Carbon/TC)
- Stationary Ring(SiC/TC)
- Secondary Seal(VITON/Encapsulated Ring/PTFE)
- Metal Bellows(SUS316L/AM350/Inconel718
/Titanium/Hastelloy-C/Alloy-20)
- Other Parts(SUS304/SUS316/Titanium/Hastelloy-C)

Seal size d(inches)	d ₁	l
0.750	1.312	1.250
0.875	1.437	1.250
0.937	1.500	1.250
1.000	1.562	1.250
1.125	1.687	1.250
1.250	1.812	1.312
1.375	1.937	1.437
1.500	2.062	1.437
1.625	2.187	1.437
1.750	2.312	1.437
1.875	2.437	1.500
2.000	2.562	1.500
2.125	2.687	1.500
2.250	2.812	1.562
2.375	2.937	1.562
2.500	3.187	1.562
2.625	3.312	1.625
2.750	3.437	1.625
2.875	3.625	1.687
3.000	3.750	1.687
3.125	3.875	1.750
3.250	4.000	1.750
3.375	4.125	1.750
3.500	4.250	1.875
3.625	4.375	1.875
3.750	4.500	1.875
3.875	4.625	1.875
4.000	4.750	1.875
4.250	5.187	1.903
4.500	5.437	1.903
4.750	5.687	1.903
5.000	5.937	1.903
5.250	6.213	1.903
5.500	6.463	1.903
5.750	6.714	1.903
6.000	6.964	1.903

Seal size d(mm)	d ₁	l
18	32.0	27.5
20	33.3	27.5
22	36.0	27.5
24	38.1	30.0
25	39.0	30.0
28	42.0	32.5
30	44.0	32.5
32	46.0	32.5
33	47.0	32.5
35	49.2	32.5
38	52.4	34.0
40	55.6	34.0
43	58.7	34.0
45	58.7	34.0
48	61.9	34.0
50	65.1	34.5
53	68.3	34.5
55	71.0	34.5
60	74.6	39.5
65	84.1	39.5
70	87.3	45.0
75	95.3	45.0
80	98.4	44.5
85	104.8	44.5
90	108.0	49.5
95	114.3	49.5
100	120.7	49.5
105	131.7	48.3
110	138.1	48.3
115	144.5	48.3
120	144.5	48.3
125	150.8	48.3
130	157.8	48.3
140	170.5	48.3
150	176.9	48.3