
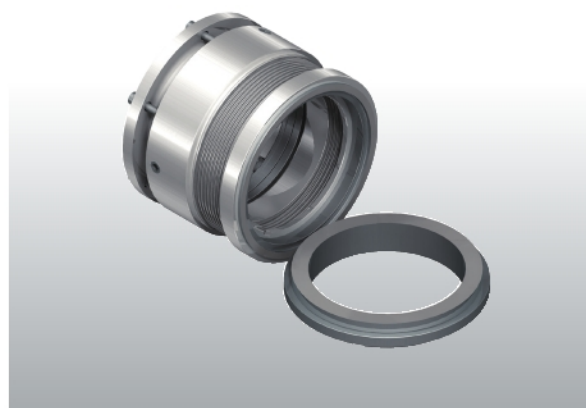


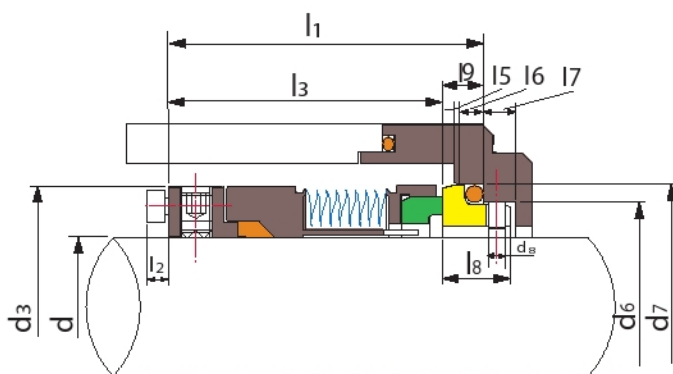

SM MF 80

技术参数:

压力: $\leq 2.5\text{MPa}$

速率: $\leq 20\text{m/s}$

温度: $-100^{\circ}\text{C} \sim +100^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 2.5\text{MPa}$

Speed: $\leq 20\text{m/s}$

Temperature: $-100^{\circ}\text{C} \sim +100^{\circ}\text{C}$

- 动环(碳化硅/石墨/碳化钨)
- 静环(碳化硅/碳化钨)
- 辅助密封(氟胶/包覆圈/柔性石墨)
- 金属波纹管(SUS316L/AM350/Inconel718/
钛材/哈氏C/合金20)
- 其它部件(SUS304/SUS316/钛材/哈氏-C)

- Rotary Ring(SiC/Carbon/TC)
- Stationary Ring(SiC/TC)
- Secondary Seal(VITON/Encapsulated Ring/Flexible Carbon)
- Metal Bellows(SUS316L/AM350/Inconel718
/Titanium/Hastelloy-C/Alloy-20)
- Other Parts(SUS304/SUS316/Titanium/Hastelloy-C)

d (mm)	d _s	d _o	d ₇	d ₈	l ₁	l ₃	l ₅	l ₆	l ₇	l ₈	l ₉	l ₂
16	38	29.0	35.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5
18	40	31.0	37.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5
20	42	34.0	40.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5
22	44	37.0	43.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5
24	46	37.0	43.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5
25	47	39.0	45.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5
28	50	42.0	48.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5
30	52	44.0	50.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5
32	54	49.0	56.0	4	60.5	46.5	2.0	6	9	22.0	14.0	5
33	55	49.0	56.0	4	60.5	46.5	2.0	6	9	22.0	14.0	5
35	57	51.0	58.0	4	60.5	46.5	2.0	6	9	22.0	14.0	5
38	60	54.0	61.0	4	60.5	46.5	2.0	6	9	22.0	14.0	5
40	66	56.0	63.0	4	61.5	47.5	2.0	6	9	22.0	14.0	6
43	69	59.0	66.0	4	61.5	47.5	2.0	6	9	22.0	14.0	6
45	71	62.0	70.0	4	62.5	47.5	2.5	6	9	23.0	15.0	6
48	74	65.0	73.0	4	62.5	47.5	2.5	6	9	23.0	15.0	6
50	76	67.0	75.0	4	62.5	47.5	2.5	6	9	23.0	15.0	6
53	79	70.0	78.0	4	62.5	47.5	2.5	6	9	23.0	15.0	6
55	81	72.0	80.0	4	62.5	47.5	2.5	6	9	23.0	15.0	6
58	85	75.0	83.0	4	68.0	53.0	2.5	6	9	23.0	15.0	6
60	87	77.0	85.0	4	68.0	53.0	2.5	6	9	23.0	15.0	6
63	90	81.0	90.0	4	71.0	53.0	2.5	7	9	26.0	18.0	6
65	92	83.0	92.0	4	71.0	53.0	2.5	7	9	26.0	18.0	6
68	95	88.0	97.0	4	71.0	53.0	2.5	7	9	26.0	18.0	6
70	97	88.0	97.0	4	71.0	53.0	2.5	7	9	26.0	18.0	6
75	102	95.0	105.0	4	71.0	52.8	3.0	7	9	26.2	18.2	6
80	107	100.0	110.0	4	71.0	52.8	3.0	7	9	26.2	18.2	6
85	112	105.0	115.0	4	71.0	52.8	3.0	7	9	26.2	18.2	6
90	117	110.0	120.0	4	71.0	53.8	3.0	7	9	25.2	17.2	6
95	122	115.0	125.0	4	71.0	53.8	3.0	7	9	25.2	17.2	6
100	127	122.2	134.3	5	74.0	54.0	3.0	9	11	30.0	20.0	6