

EA700 Series Standard Damper Actuators

Designed for damper control within HVAC systems.



Torque:

2Nm, 5Nm, 10Nm, 20Nm, 30Nm, 40Nm


Nominal Voltage and Control Type:

AC/DC19.2-28.8V or AC85-265V, 2-point/3-point, D

AC/DC19.2-28.8V, 0(2)-10V or 0(4)-20mA, M

Product Code Description:

EA700 - X X X - X

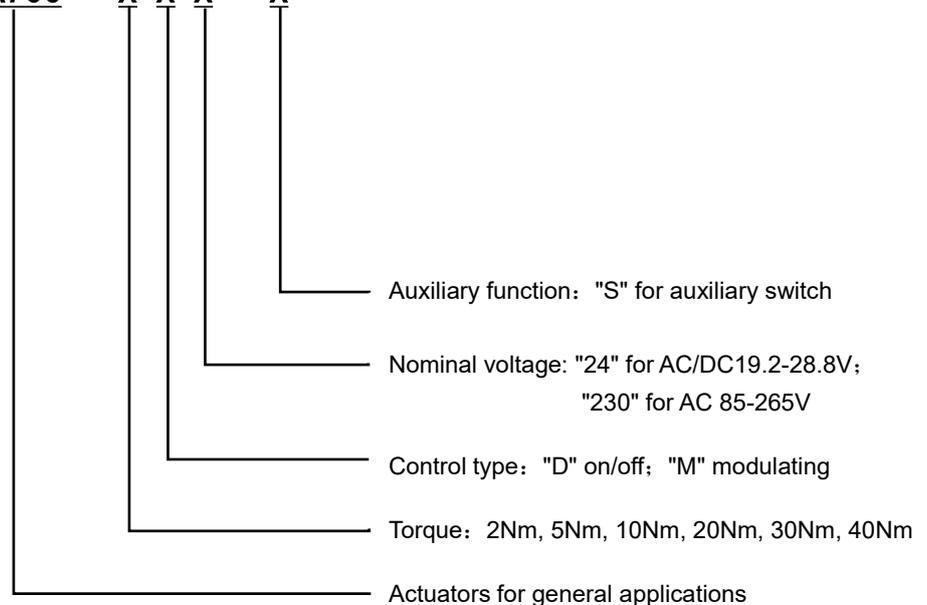

EA700 Series Standard Damper Actuators

40Nm Model Selection Chart




Model	Torque	Running Time	Nominal Voltage	Auxiliary Function
EA700-40D24	40Nm	100s	AC/DC 24V	None
EA700-40D230			AC 230V	
EA700-40M24			AC/DC 24V	
EA700-40D24-S			AC/DC 24V	Auxiliary Switches
EA700-40D230-S			AC 230V	
EA700-40M24-S			AC/DC 24V	

Technical Parameters


Model	EA700-40D24	EA700-40D230	EA700-40M24
	EA700-40D24-S	EA700-40D230-S	EA700-40M24-S
Electrical Parameters			
Nominal Voltage	AC/DC 24V 50/60Hz	AC 230V 50/60Hz	AC/DC 24V 50/60Hz
Voltage Range	AC/DC 19.2-28.8V	AC 85-265V	AC/DC 19.2-28.8V
Power	running	5W	
Consumption	holding	0.7W	0.7W
Cable Specification	On/Off Type: 1m cable 3*0.75mm ² ; Modulating Type: 1m cable 4*0.5mm ² ; Feedback Signal: 1m cable 6*0.5mm ²		
General Parameters			
Torque	40Nm		
Damper Size	8m ²		
Running Time	100s		
Control Type	2-point/3-point		0(2)-10V or 0(4)-20mA
Rotation Angle	0~90° (93°max.)		
Rotation Direction	L/R switch		
Position Feedback	available with 2 auxiliary switches		
Life Cycle	≥70000		
Noise Level	45dB		
Working Environment			
Protection Class	II /III		
Protection Level	IP54		
Ambient Temperature	-30~+50°C		
Ambient Humidity	5~95%RH		
Storage Temperature	-40~+80°C		
Dimension/Weight/Other			
Shaft	 12-26.7mm; If the size of the damper shaft is small, use shaft spacer 6		
Weight	1.4Kg		
Certificate	CE、UL、UKCA、RoHS		

EA700 Series Standard Damper Actuators





EA700-30/40 Shaft Dimensions

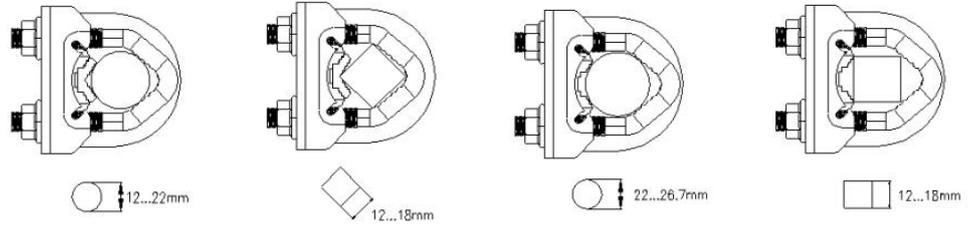

Unit: mm

Throttle Axis	Length			
	≥ 52	12.....26.7	≥ 12	≤ 26.7

EA700-30/40 Shape and Mounting Dimensions (mm)

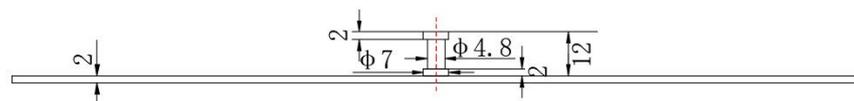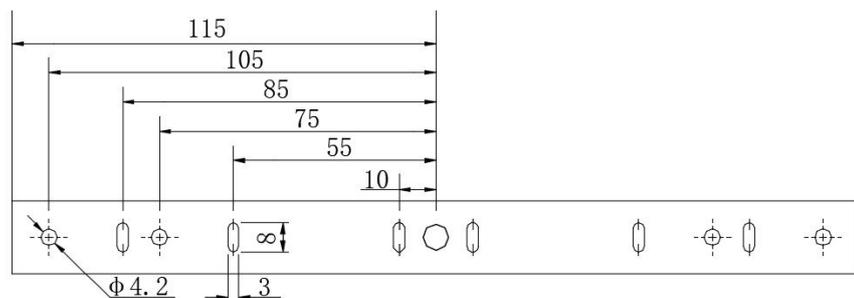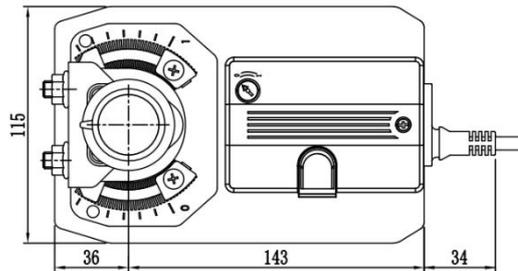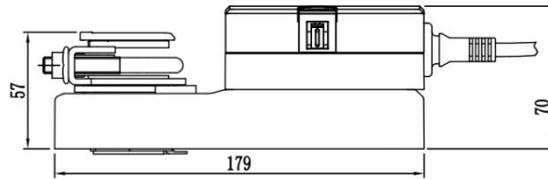


EA700 Series Damper Actuators Installation Diagram


Wiring Diagram



ON/OFF


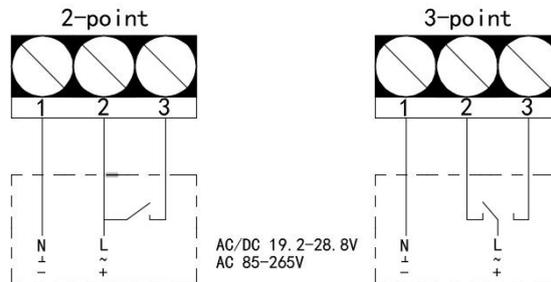


MODULATING

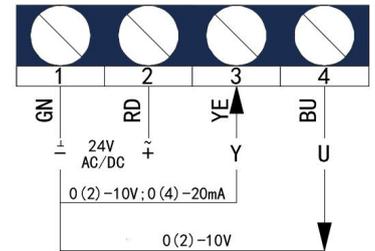

Control signal and Input resistance

According to on-site needs, the position of the SW1 dial switch in the circuit board can be adjusted to achieve the conversion of control signals and feedback signals, as shown in the following figure.

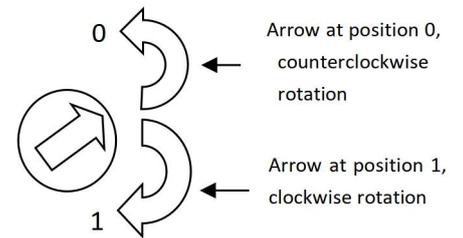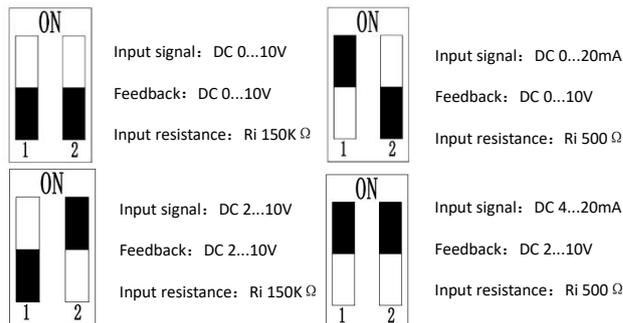

Auxiliary Switch Description

