


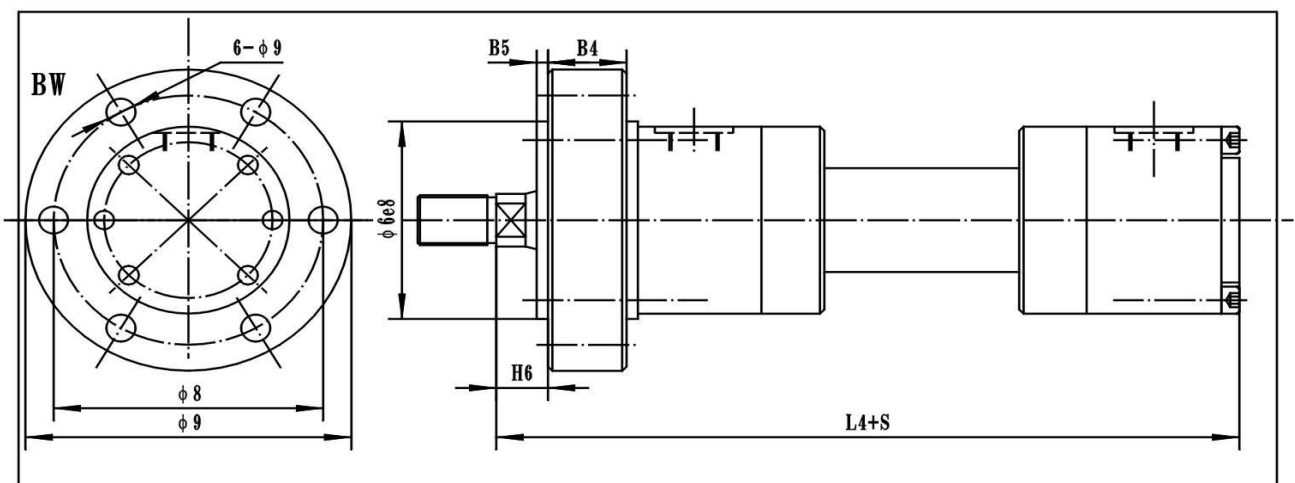
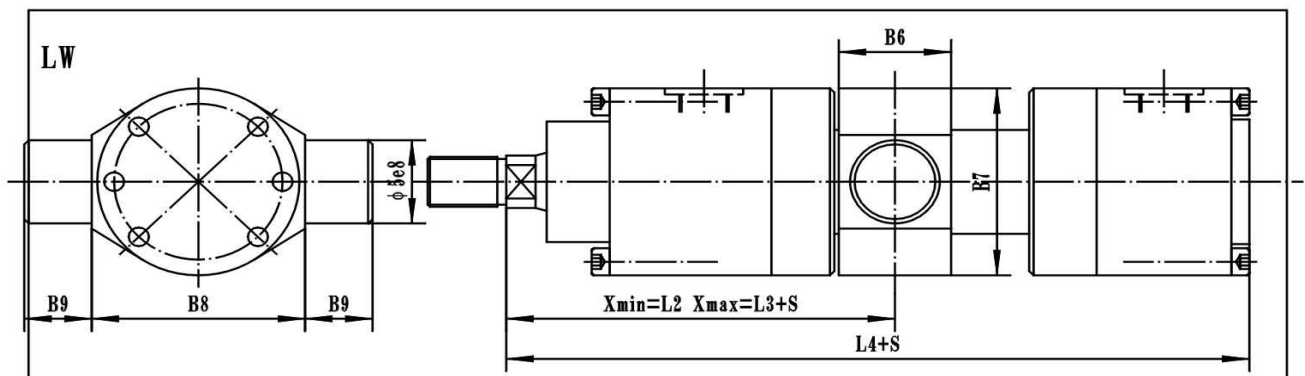
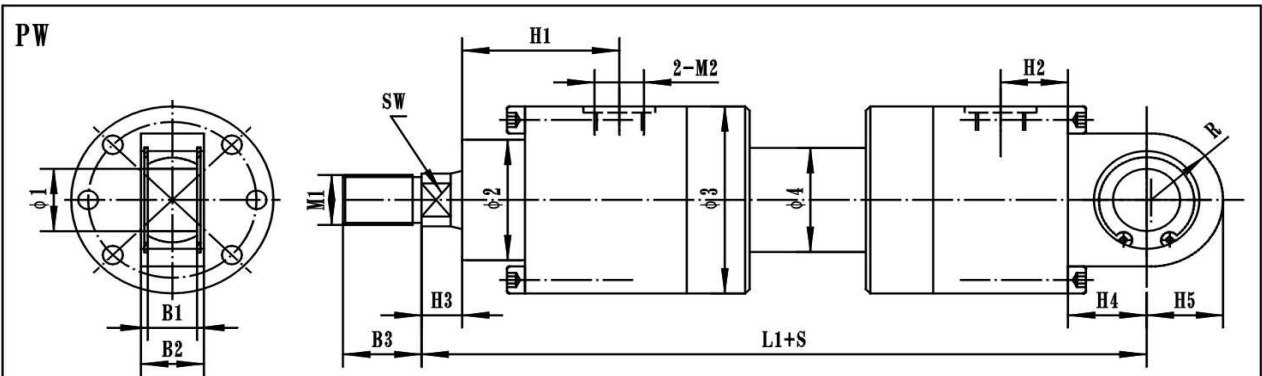
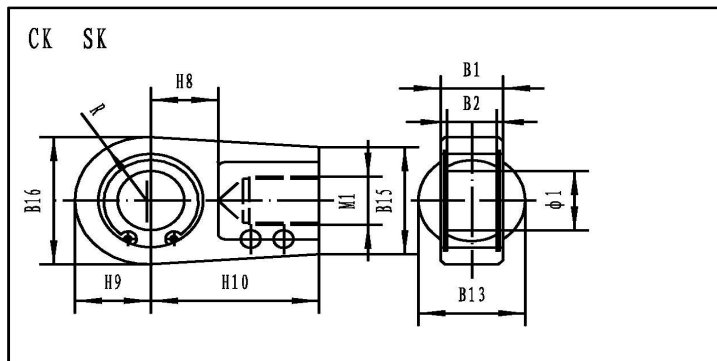


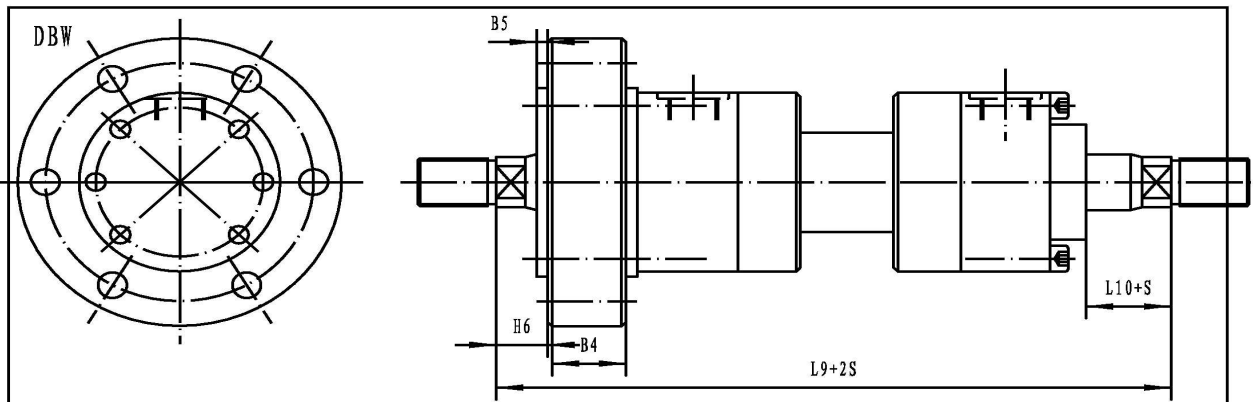

HLH812重型系列：尺寸根据德国钢厂标准制定，缸径40-320mm，额定压力250bar。

配置优质德国密封件，启动压力低保压效果好，低压防渗漏，内外
零泄露结构设计，可配制内置位移传感器（适用于工程、冶金行业）。

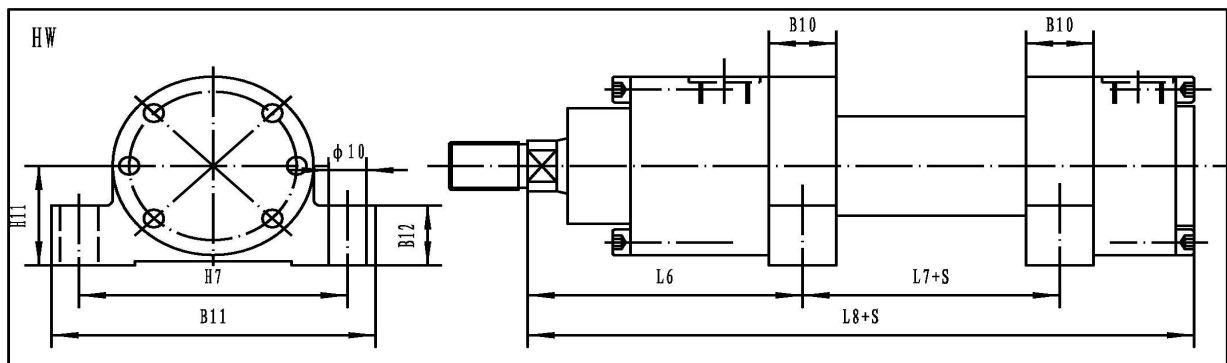

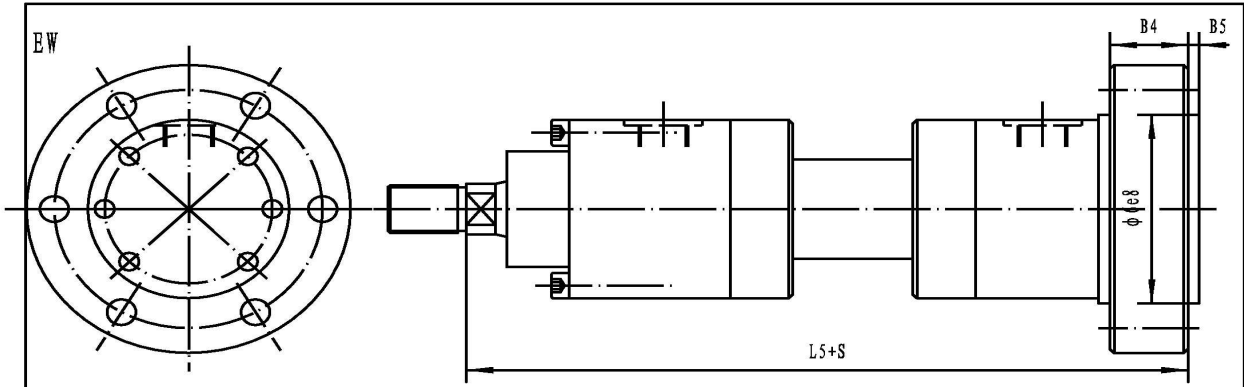






HLH812系列数据表





D	d	M1	M2	R	φ1	φ2	φ3	φ4	φ5	φ6	φ7	φ8	φ9	φ10	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	B1	重量kg		
40	22	25	28	24×2	22×1.5	28	30	55	85	52	30	90	10	108	130	11	252	150	120	226	256	106	55	226	268	14	20	30
50	28	32	36	30×2	22×1.5	32	35	68	103	65	30	110	12	130	160	11	263	156	126	233	263	111	65	233	287	18	22	35
63	36	40	45	39×3	27×2	39	40	75	113	80	35	130	13	155	185	13	302	178	141	262	297	127	70	262	324	22	25	45
80	45	50	56	50×3	27×2	47	50	95	135	95	40	145	13	170	200	17	330	190	156	285	315	135	72	285	342	25	28	45
100	56	63	70	64×3	33×2	58	60	115	165	120	50	175	17	205	245	21	385	227	180	330	375	165	80	330	409	30	35	55
125	70	75	90	80×3	42×2	65	70	135	200	145	60	210	21	245	295	25	447	262	212	387	432	190	90	387	470	32	44	60
140	90	100		90×3	42×2	77	80	155	220	165	65	230	21	265	315	28	490	276	238	420	470	208	90	420	507	35	49	65
160	100	110		100×3	48×2	88	90	180	265	190	75	275	28	325	385	31	550	320	257	475	535	233	105	475	571	40	55	70
180	110	125		110×4	48×2	103	100	190	290	215	85	300	28	360	420	42	600	355	280	520	605	250	115	520	648	40	60	100
200	125	140		120×4	48×2	115	110	215	313	235	90	320	31	375	445	37	645	365	290	540	615	270	145	540	675	40	70	100
220	140	160		120×4	48×2	132	110	245	350	260	110	370	33	430	490	45	750	416	340	625	710	307	166	625	780	40	70	100
250	160	180		160×4	48×2	170	120	280	400	295	140	450	43	530	610	52	825	488	352	695	820	320	174	695	814	40	85	150
280	180	200		150×4	48×2	190	120	305	420	330	170	480	43	560	640	52	885	540	375	745	880	370	164	745	905	45	85	165
320	200	220		180×4	48×2	240	160	340	450	375	200	510	43	590	640	62	965	600	380	775	915	375	180	775	1000	45	105	260

D	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	B13	B14	B15	B16	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	SW	
40	23	30	30	5	35	85	95	20	25	135	25	28	95	48	56	60	28	14	32	30	19	110	25	30	65	45	17	22
50	28	35	30	5	35	103	115	20	25	155	30	34	109	54	64	60	28	18	35	34	23	130	30	37	75	55	22	27
63	30	45	35	5	40	113	130	20	30	180	35	44	132	66	78	67	34	22	45	42	27	150	40	42	90	65	30	32
80	35	55	35	5	45	135	145	25	40	210	40	55	155	78	94	76	35	20	53	50	25	170	45	50	105	70	36	41
100	40	75	45	5	55	165	175	30	50	250	50	70	198	90	116	88	43	30	60	63	35	205	55	63	135	90	46	55
125	50	95	45	10	65	200	210	40	60	305	60	87	240	118	130	97	50	32	70	70	42	255	65	70	170	105		75
140	55	110	50	10	70	220	230	42.5	65	340	65	105	278	130	154	105	50	35	75	82	45	280	75	83	195	115		80
160	60	120	60	10	85	265	275	52.5	75	400	70	125	305	158	176	120	60	40	85	95	50	330	80	95	210	135		100
180	65	140	70	10	100	270	300	55	90	450	85	135	363	165	206	130	60	40	90	113	50	370	90	113	260	150		110
200	70	150	75	10	100	310	320	55	90	465	85	170	400	172	230	145	65	40	115	125	50	385	105	125	275	160		120
220	80	160	85	10	110	350	370	60	94	530	95	180	442	194	264	163	80	40	125	143	55	445	115	142	300	185		145
250	90	190	125	10	150	400	450	100	100	600	110	210	540	224	340	200	85	40	140	180	55	500	140	180	360	210		160
280	90	190	135	10	180	420	470	125	110	680	125	210	540	224	340	225	90	45	140	200	55	530	140	180	360	225		180
320	100	220	145	10	210	450	500	150	120	780	140	260	710	245	480	255	90	45	200	250	55	610	200	250	460	225		200



HLH813系列：尺寸根据德国Cetop标准R58H而定，活塞直径25—250毫米，额定压力25MPa。

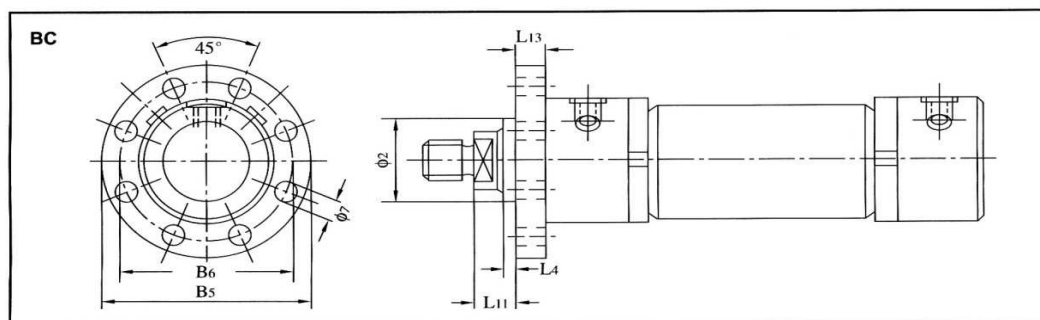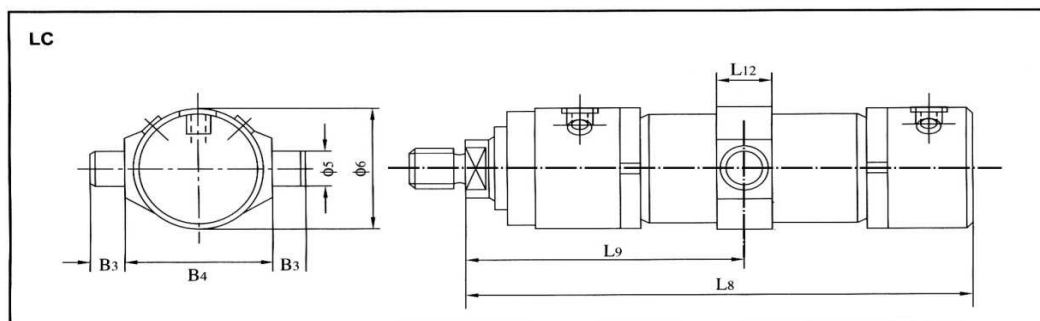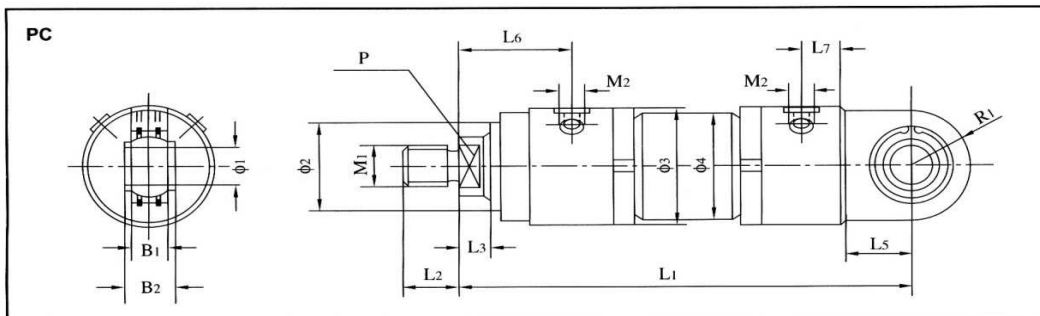

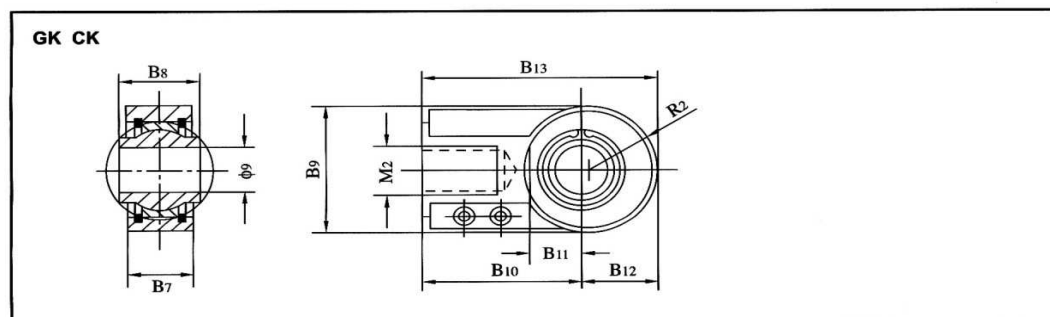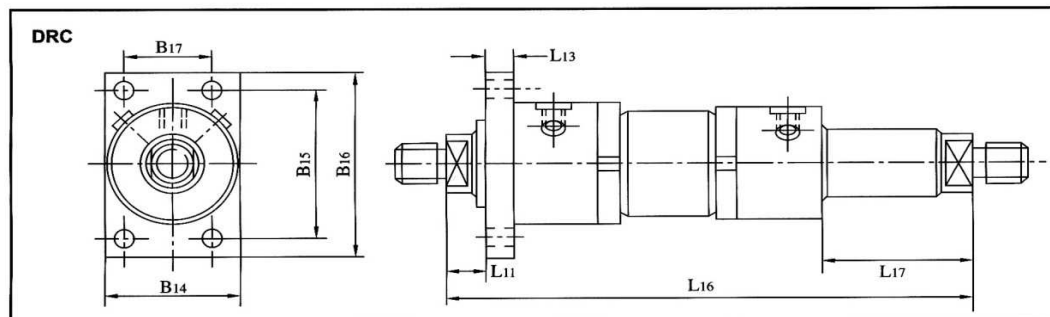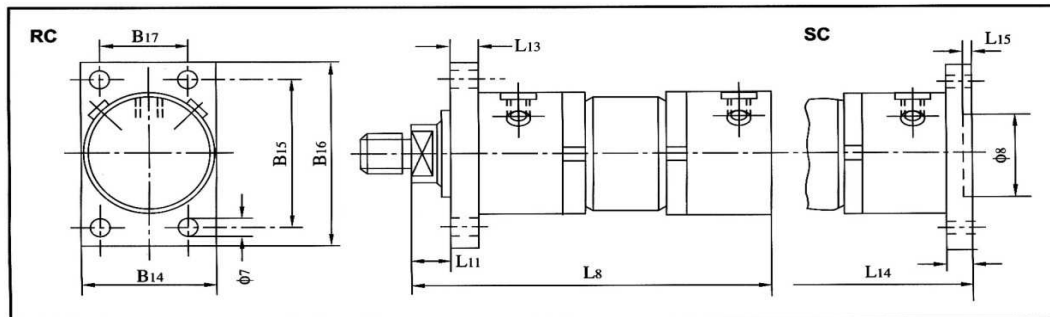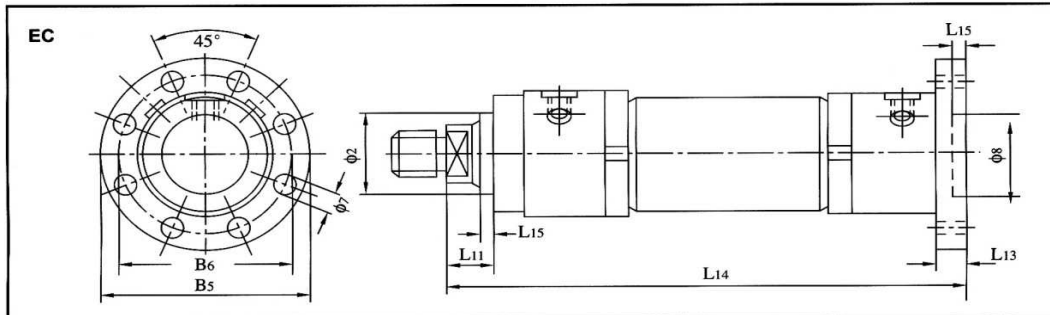

HLH813系列数据表

D	d	M1	M2	P	L1	L2	L3	L4	L5	L6	L7	L8	L9 X _{min}	L10 X _{min}	L11	L12	L13	L14	L15	L16	L17	φ1	φ2	LC型最小S
25	14/18	12x1.25	14x1.5	12/14	178+S	16	13	3	28	52	17	150+S	135	58+S	16	15	12	162+2S	3	198+2S	13+S	12	32	80
32	18/22	14x1.5	18x1.5	14/17	206+S	18	13	3	36	44	17	170+S	140	67+S	16	20	16	186+2S	3	209+2S	13+S	16	40	80
40	22/28	16x1.5	22x1.5	17/22	231+S	22	13	3	41	56	23	190+S	150	78+S	16	25	16	206+2S	3	232+2S	13+S	20	50	80
50	28/36	20x1.5	22x1.5	22/30	257+S	28	14	4	52	62	23	205+S	182	78+S	18	30	20	225+S	4	269+2S	14+S	25	60	110
63	36/45	27x2	27x2	30/36	289+S	36	16	4	65	70	23	224+S	206	79+S	20	40	25	249+S	4	294+2S	16+S	32	70	130
80	45/56	33x2	27x2	36/46	332+S	45	18	4	82	82	5	250+S	235	85+S	22	50	32	282+S	4	322+2S	18+S	40	85	150
100	56/70	42x2	33x2	46/60	395+S	55	20	5	95	85	32	300+S	256	108+S	25	60	32	332+S	5	392+2S	20+S	50	106	150
125	70/90	48x2	33x2	60/75	428+S	62	23	5	100	87	31	325+S	278	121+S	28	70	32	357+S	5	427+2S	23+S	63	132	160
160	90/110	64x3	42x2	75/100	505+S	84	25	5	135	105	45		322	110+S	30	90	36	406+S	5	458+2S	25+S	80	160	220
200	110/140	80x3	42x2	100/120	615+S	94	30	5	165	105	45		365	155+S	35	110	40	490+S	5	538+2S	30+S	100	200	210
250	140/180	100x3	48x2	100/160	773+S	110	35	5	223	135	45		450	170+S	40	140	56	606+S	5	630+2S	35+S	125	250	280

D	d	φ3	φ4	φ5	φ6	φ7	φ8	φ9	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	B13	B14	B15	B16	B17
25	14/18	50	5	2	50	5.5	32	12	12	10	10	63	90	75	11	12	32	38	17	16	54	45	69.2	85	28.7
32	18/22	57	42	6	57	9	40	16	16	15	12	75	110	92	13	16	40	44	18	20	64	55	85	05	35.2
40	22/28	68	54	20	68	9	50	0	20	18	16	90	25	106	17	20	47	52	22	25	77	60	98	115	40.6
50	28/36	76	62	25	76	11	60	5	25	20	20	105	145	126	21	25	54	65	27	31	96	70	116.4	140	48.2
63	36/45	97	80	32	95	14	70	32	32	30	25	120	170	145	27	32	66	80	32	38	118	80	134	160	55.5
80	45/56	116	95	40	116	18	85	40	0	5	32	135	195	165	32	40	80	97	41	48.5	145.5	95	152.5	185	63.1
100	56/70	135	120	50	135	22	106	50	50	45	40	60	35	200	40	50	96	120	50	59	179	110	164.8	200	76.5
125	70/90	165	145	63	165	22	132	63	63	55	50	195	270	235	52	63	114	140	62	62	211	129	217.1	255	85.2
160	90/110	215	190	80	15	22	160	80	80	70	63	240	315	280	66	80	148	180	78	78	270				
200	110/140	260	235	100	60	6	200	100	100	90	80	295	380	340	84	100	178	210	98	98	322				
250	140/180	330	295	125	330	33	250	125	125	110	100	370	470	420	102	125	200	60	120	120	405				






冶金设备用HLY型液压缸(P≤25MPa)(JB/ZQ4181-1997)

		HLY	R	WE	10	φ 320	X 5000	X 2000	-	21	W
华铝迈克国标冶金重型液压缸											
工 作 类 型	常规缸(工作温度-35~+100° C) (工作速度 0~5米/秒)	无标记									
	高温缸(工作温度-35~+225° C) (工作速度 0~5米/秒)	—— R									
	高速缸(工作温度-35~+60° C) (工作速度 0~5米/秒)	—— V									
安 装 方 式	尾部耳环式	—— WE									
	中部摆动式	—— ZB									
	头部摆动式	—— TB									
	头部法兰式	—— TF									
	尾部法兰式	—— WF									
	脚架固定式	—— JG									
	中部摆动式等速缸	—— ZBD									
	头部法兰式等速缸	—— TFD									
	脚架固定式等速缸	—— JGD									
活 连 塞 接 杆 方 端 式	外螺纹	—— 10									
	外螺纹 型杆端耳环	—— 11									
	内螺纹	—— 20									
	内螺纹 型杆端耳环	—— 22									
缸 径		—— 单位mm									
行 程		—— 单位mm									
中轴 部 位 耳 置	标准长度 L13+1/2行程	无标记									
	用户要求长度	—— 单位mm									
额定压力 (MPa)		10, 12.5, 16, 21, 25									
工 作 介 质	矿物油	—— 无标记									
	水乙二醇, 乳化液	—— W									
	磷酸脂系	—— P									
	其他介质	—— 用文字说明									

脚架固定式 JG

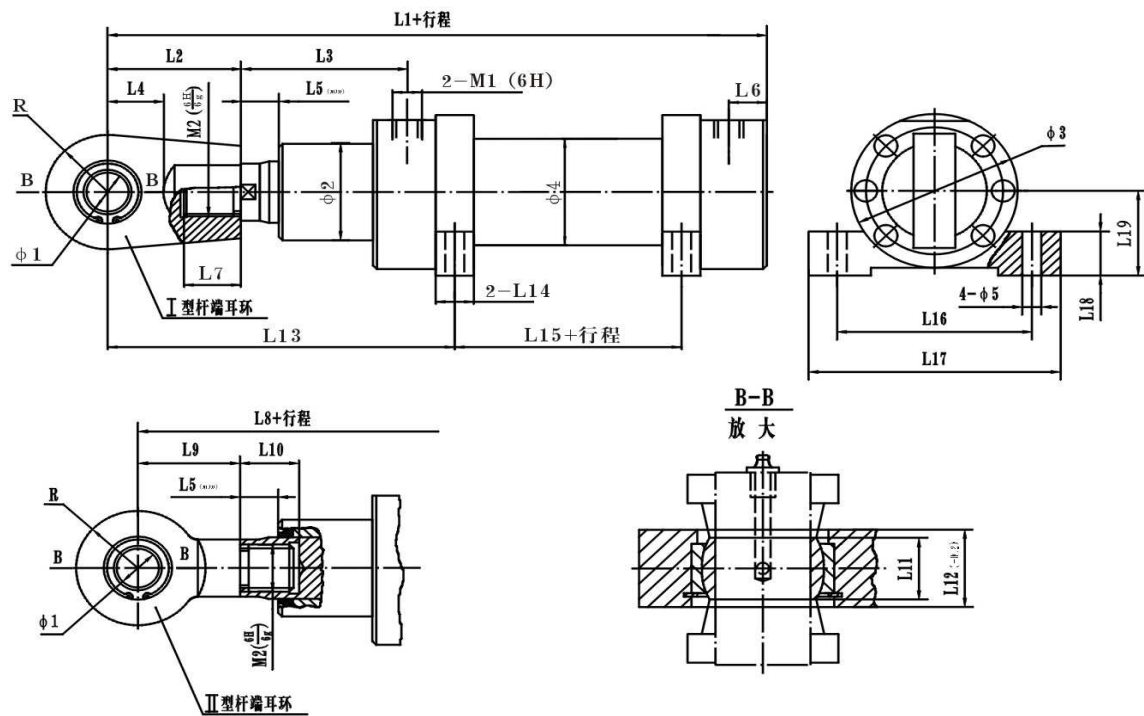

脚架固定式数据表

缸径	杆径	φ1	φ2	φ3	φ4	φ5	R	M1	M2	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	L18	L19
40	28	25	58	90	58	11	30	M22X1.5	M18X2	345	65	127	30	28	32	30	310	30	32	20	27	226.5	25	52	115	145	25	50
50	36	30	70	108	70	13.5	40	M22X1.5	M24X2	387	80	137	35	32	39	40	347	40	42	22	30	252	30	61	140	175	30	60
63	45	35	80	126	83	15.5	46	M27X2	M30X2	430	95	145	40	33	45	50	382	47	52	25	35	282.5	35	60	160	200	35	70
80	56	40	100	148	108	17.5	55	M27X2	M39X3	466	115	164	50	37	45	58	420	55	62	28	37	320	40	60	185	230	40	80
100	70	50	120	176	127	20	65	M33X2	M50X3	560	140	170	60	40	63	70	490	70	73	35	44	367.5	45	72	215	265	50	95
125	90	60	150	220	159	24	82	M42X2	M64X3	628	160	215.5	70	48	55	80	556	76	83	44	55	343	55	225	260	315	60	115
140	100	70	167	246	178	26	92	M42X2	M80X3	700	185	235	85	48	75	86	600	85	93	49	62	373	60	250	295	355	65	130
160	110	80	190	272	194	30	105	M48X2	M90X3	760	210	251.5	100	51	58	100	644	94	103	55	66	406	65	274	335	400	70	145
180	125	90	210	300	219	33	120	M48X2	M100X3	840	250	263	110	51	80	120	710	120	125	60	72	456	70	294	370	445	80	160
200	140	100	230	330	245	39	130	M48X2	M110X4	910	280	281	120	56	75	140	770	140	145	70	80	491	80	324	410	500	90	175
220	160	110	255	365	270	45	145	M48X2	M120X4	990	310	327	130	57	84	160	832	152	165	70	80	527	90	358	460	560	100	195
250	180	120	295	410	299	52	165	M48X2	M140X4	1135	360	377	150	65	85	180	965	190	185	85	95	615	100	410	520	630	110	220
280	200	140	318	462	325	52	185	M48X2	M160X4	1215	400	385	170	65	138	200	1010	195	205	90	100	655	110	435	570	680	120	245
320	220	160	390	525	375	62	220	M48X2	M180X4	1320	460	408	200	65	120	220	1088	228	225	105	120	715	120	475	660	800	140	280
360	250	180	404	560	420	62	250	M48X2	M200X4	1377	480	420	220	65	105	240	1085	220	245	105	120	767	120	475	695	835	150	310
400	280	200	469	625	470	70	280	M48X2	M220X4	1447	520	445	240	65	110	260	1119	234	265	110	130	827	130	480	750	870	160	340