



上海京盛光电科技有限公司

SHANGHAI JINGSHENG OPTOELECTRONICS TECHNOLOGY CO.,LTD



上海京盛光电科技有限公司

SHANGHAI JINGSHENG OPTOELECTRONIC TECHNOLOGY CO., LTD

地址：上海市宝山区殷高西路101号12楼

ADD.: ROOM 1205, NO. 101, WEST YINGAO ROAD, BAOSHAN, SHANGHAI, CHINA

TEL: 021-66180573

[http:// www.jsoptic.com](http://www.jsoptic.com)

E- mail: sales@jsoptic.com

专业光学元件供应商

关于我们

上海京盛光电科技有限公司是一家专业从事精密光学元件、激光晶体材料、光通信元件的研发、生产和销售的企业。公司坐落于美丽的魔都上海宝山工业区，拥有光学设计、精密光学加工、光学镀膜和精密光学组装等技术和工艺。公司拥有优秀的管理团队，拥有20多年的行业经验的技术团队，公司已通过ISO9001质量体系认证，对制造过程实施完整的管理，拥有先进的生产和检测设备。



产品范围

公司主要光学产品包括：高精度透镜、棱镜、透镜、分束器、视窗、波片、滤光片等；激光晶体包括：BBO/LBO 非线性晶体、YVO4晶体、ND:YVO4、LN楔角片、器件包括激光器、隔离器、环行器、准直器、衰减器等产品，畅销国内外。




使用范围

我们的产品主要应用于光通信、激光、医疗设备、光学显示、航空航天、汽车雷达和机器视觉等领域，服务于全球市场。

公司以客户为中心，以质量为根本的经营理念。京盛光电追求卓越的技术，严格控制产品质量，为客户提供优质的产品和优良的售后服务。展望未来，我们将不断创新，与客户共同成长，携手合作共赢，为光电领域的辉煌未来而不懈努力。

证书

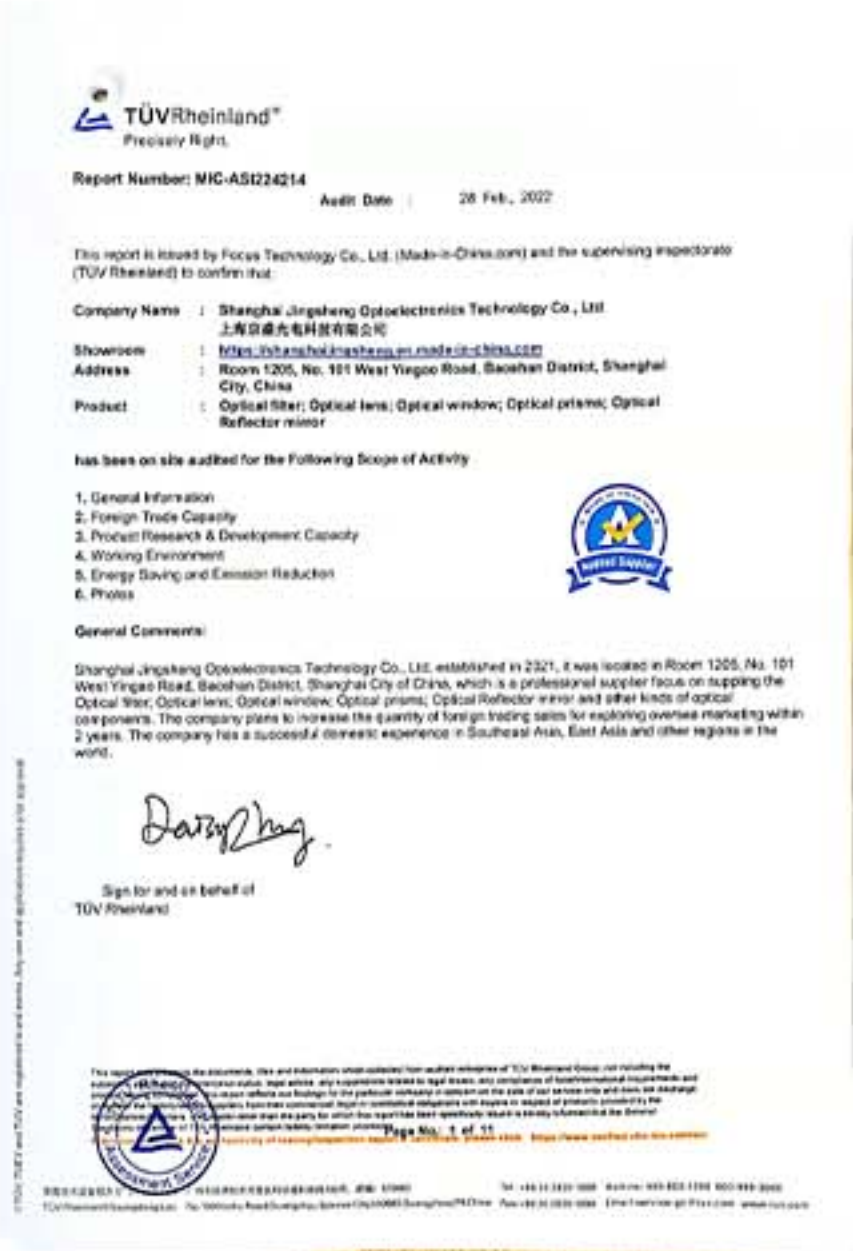

CONTENTS

目录

滤光片 Filter

窄带滤光片 Narrow band Filter.....	01
带通滤光片 Bandpass Filter.....	01
长波通滤光片 Long Pass Filter.....	02
短波通滤光片 Shortwave Pass Filter.....	02
透红外滤光片 Infrared Filter.....	03
二向色镜 Dichroic Mirror.....	03
增透镜 Intensifying Lens.....	04
偏振镜 Polarizer.....	04
陷波滤光片 Notch Filter.....	05
中性密度滤光片 Neutral Density Filter.....	05
远红外滤光片 Far Infrared Filter.....	06

窗口片 Fluoride Window

紫外窗口片 UV Window.....	06
可见窗口片 VIS Window.....	06
红外窗口片 IR Window.....	06

透镜 Lens

柱面透镜 Cylindrical Lens.....	07
球面透镜 Achromatic Lens.....	07
非球面透镜 Aspheric Lens.....	08
胶合透镜 Achromatic Doublet Lens.....	08

棱镜 Prisms



直角棱镜 Right Angle Prism.....	09
楔形棱镜 Wedge Prism.....	09
道威棱镜 Dove Prism	09
屋脊棱镜 Roof Prism.....	09
五角棱镜 Penta Prism.....	09
等边棱镜 Equilateral Prism.....	09
立方体棱镜 Cube Prism.....	09
角锥 Pyramid Prism.....	09

波片 Wave Plate

零级波片 Zero-order Wave Plate.....	09
---------------------------------	----

真零级波片	True Zero-order Wave Plate.....	09
多级波片	Multi-order Wave Plate.....	09
消色差波片	Achromatic Wave Plate.....	09
反射镜	Reflector Mirror	
金属反射镜	Metallic Mirror.....	10
介质反射镜	Dielectric Film Mirror.....	10
红外元件	Infrared Optics	
锗透镜	Ge Lens.....	11
硅透镜	Si Lens.....	11
硒化锌透镜	ZnSe Lens.....	11
氟化钙透镜	CaF2 Lens.....	11
分划板	Reticles	
十字线分划板	Plain Crosshair Reticle.....	11
角度分划板	Angle Reticle.....	11
网格分划板	Grid Reticle.....	11
激光扫描镜	Laser Scanning Mirror	
标准扫描镜	Standard Scanning Mirror.....	12
硅扫描镜	Si Scanning Mirror.....	12
分光片	Splitter	
红外分光片	Infrared Spectrometer.....	13
镀铝点阵分光片	Aluminized Dot Matrix Beam Splitter.....	13
经济型宽带分光片	Economical Broadband Splitter.....	14
晶体	Crystals	
BBO 非线性晶体	BBO Nonlinear Crystal.....	14
LBO 非线性晶体	LBO Nonlinear Crystal.....	15
YVO4 晶体	YVO4 Crystal.....	15
KTP 晶体	KTP Crystal.....	16
镜头器件	Lens Device	
扩束镜	Beam Expander.....	16
场镜	Field Lens.....	17
场镜	Field Lens.....	18
隔离器	Isolator.....	19
偏振器	Polarizer.....	20
环形器	Circulator.....	20
准直器	Collimator.....	21
光纤跳线	Fiber Jump Rope.....	21

滤光片Filter

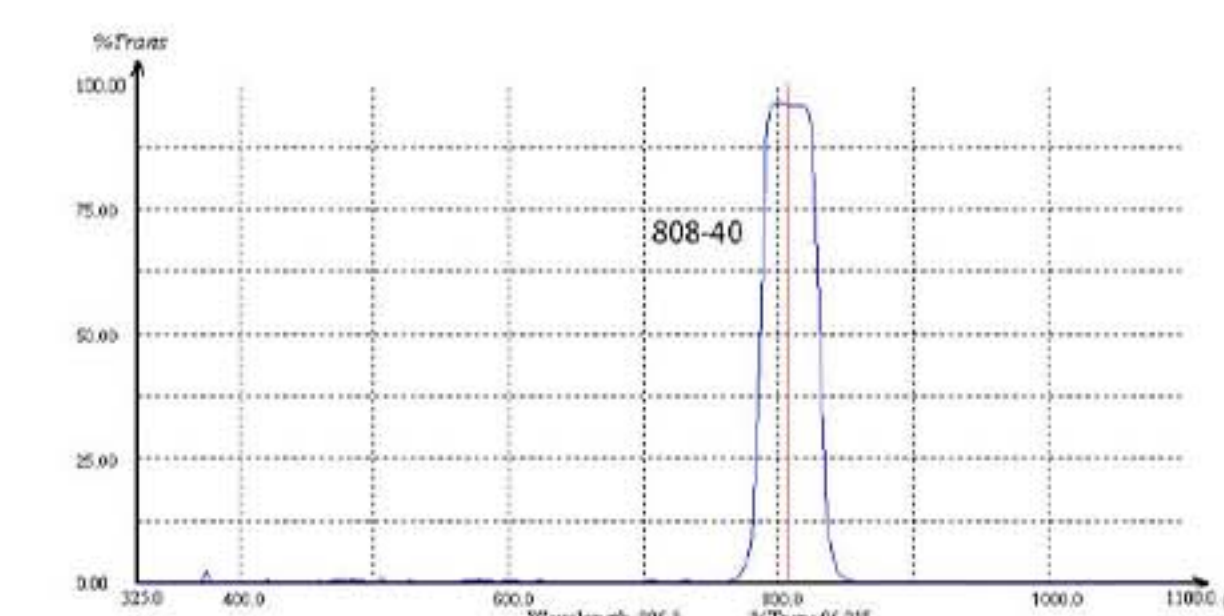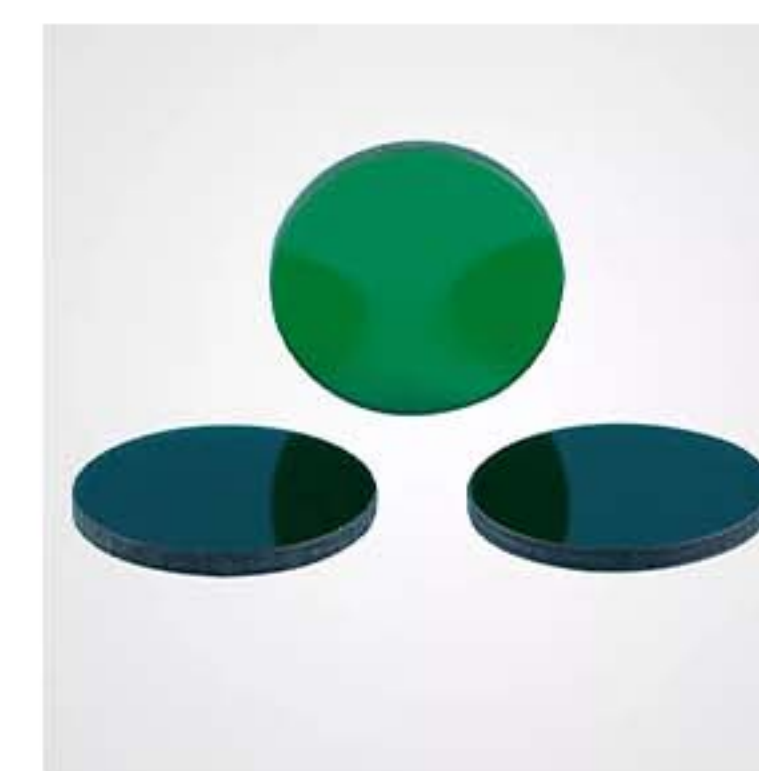


窄带滤光片Narrowband Filter

尺寸Size	1-500 mm
尺寸公差Size Tolerance	± 0.1 mm
厚度公差Thickness Tolerance	± 0.1 mm
光洁度Finish	10/5~60/40

通光孔径Clear Aperture	>95%
面形Surface Type	$\lambda/10 \sim \lambda/2$
倒角Chamfer	0.1~0.5mm x 45°
厚度Thickness	0.5-5mm

滤光片Filter

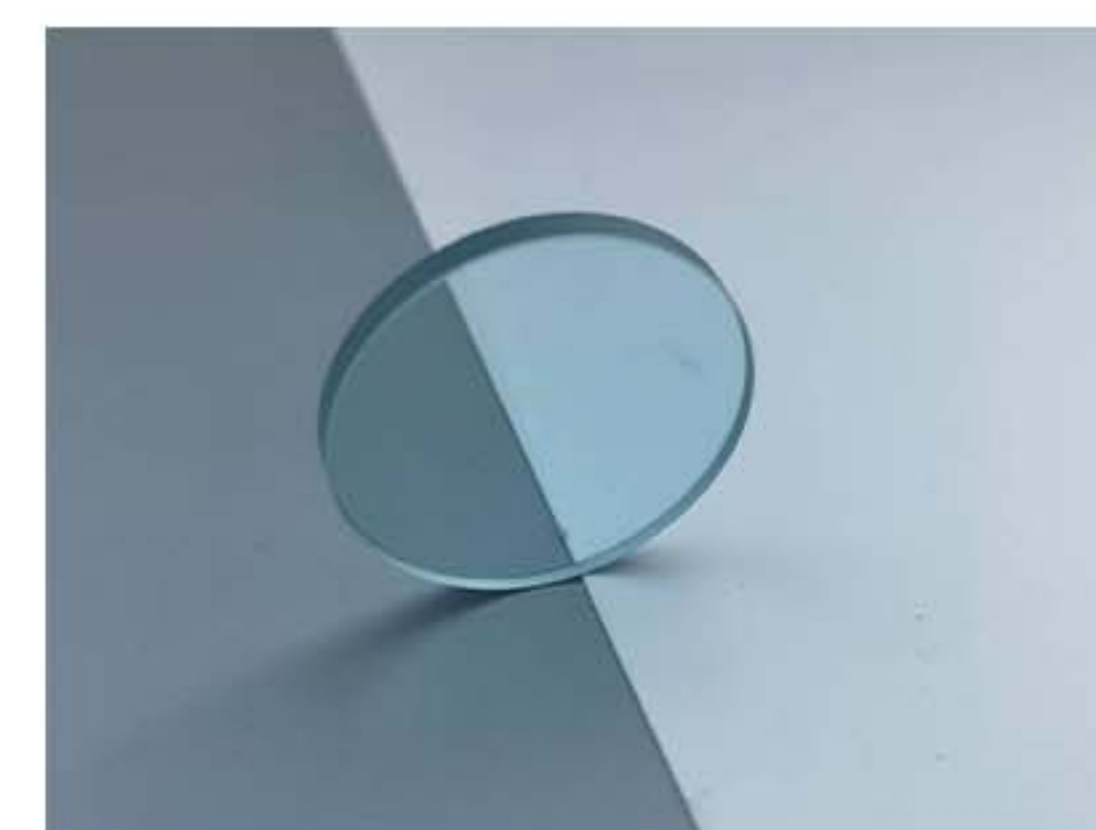


带通滤光片Bandpass Filter

中心波长Center Wavelength	245-1064nm
截止范围Cut-off Range	200-1200nm
光密度Optical Density OD 3 ; OD 4 ; OD 5 ; OD 6	
尺寸公差Size Tolerance	0.5-600 ± 0.02mm
通光孔径Clear Aperture	≥ 90 %

厚度公差Thickness Tolerance	± 0.02mm
面形Surface Type	$\lambda/10 \sim \lambda/2$
表面质量Surface Quality	10-5
倒角Chamfer	45° × 0.2 mm
镀膜Coating	AR Coating or Custom Design

滤光片Filter

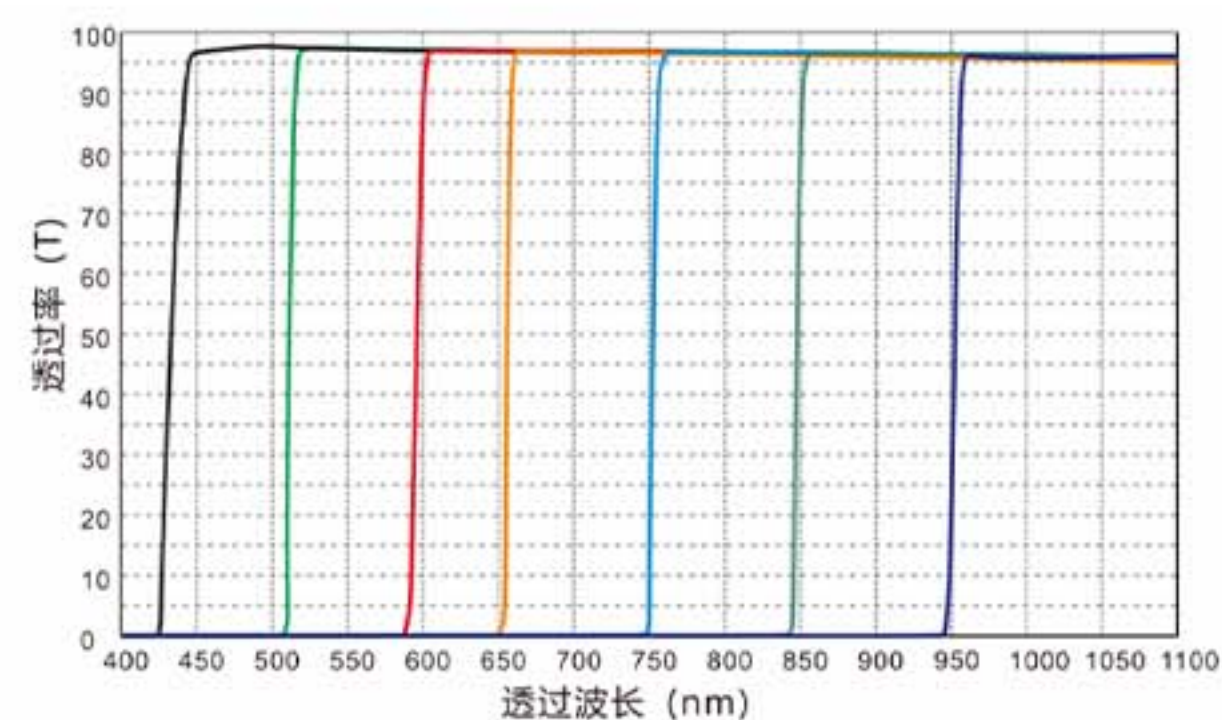


长波通滤光片Long Pass Filter

截止波长Cut-off Wavelength	325-1300nm
截止范围Cut-off Range	200-1650
光密度Optical Density	OD3; OD4; OD5; OD6尺
寸公差Size Tolerance	0.5-600±0.02mm通
光孔径Clear Aperture	≥90%

厚度公差Thickness Tolerance	0.3-50±0.02mm
面形Surface Type	/10~λ/2
表面质量Surface Quality	10-5
倒角Chamfer	45°×0.2mm
镀膜Coating	AR Coating or Customer Design

滤光片Filter

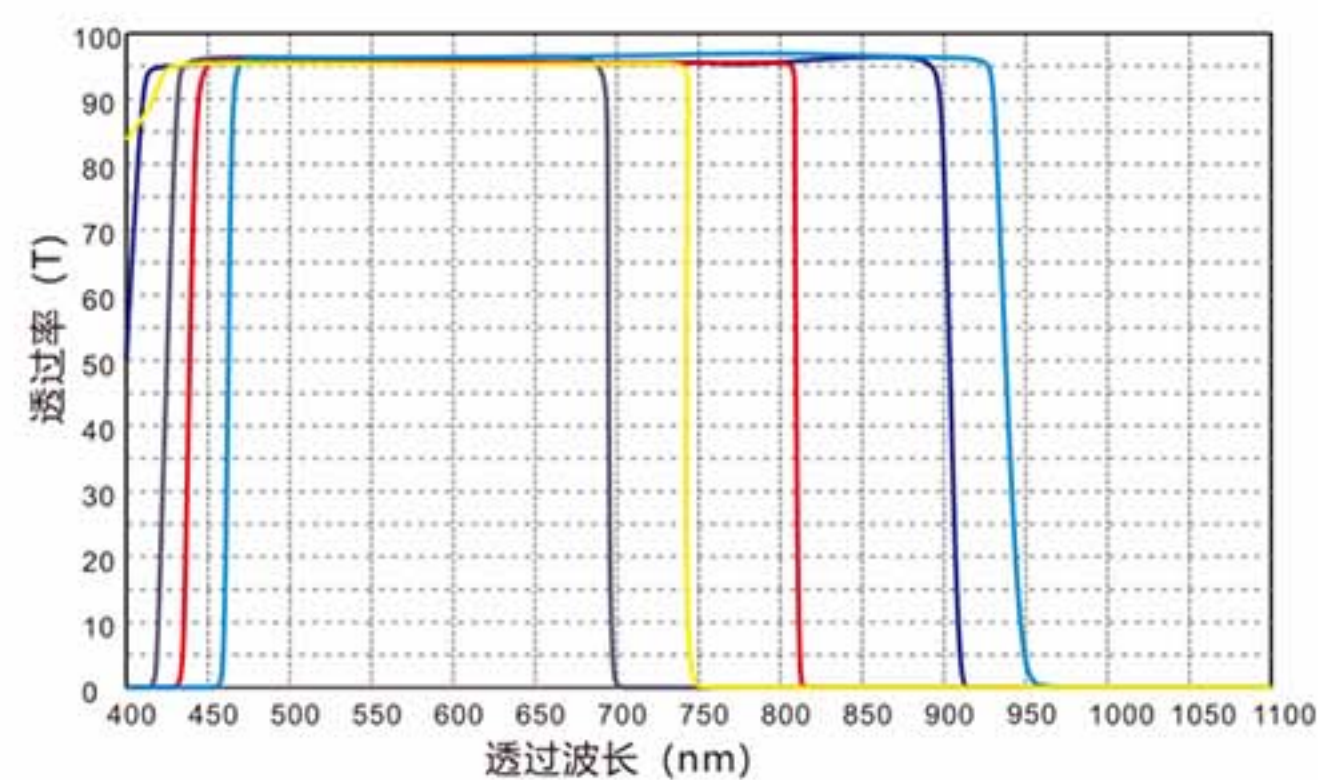


短波通滤光片Shortwave Pass Filte

截止波长Cut-off Wavelength	400-1300nm
截止范围Cut-off Range	300-1650
光密度Optical Density	OD3; OD4; OD5; OD6
尺寸公差Size Tolerance	0.5-600±0.02mm
通光孔径Clear Aperture	≥90%

厚度公差Thickness Tolerance	0.3-50±0.02mm
面形Surface Type	λ/10~λ/2
表面质量Surface Quality	10-5
倒角Chamfer	45°×0.2mm
镀膜Coating	AR Coating or Customer Design

滤光片Filter

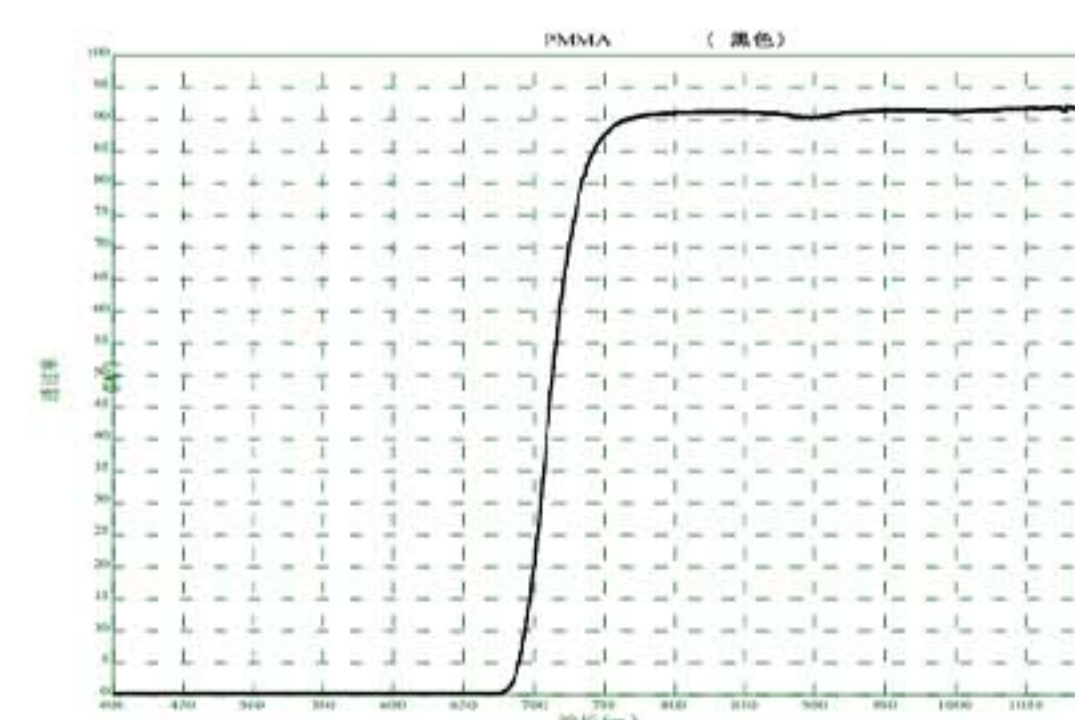


透红外滤光片Infrared Filter

材质Material	PMMA 亚克力 Acrylic
形状Shape	Square, Round, Special Shape.
尺寸Size	3-1200mm

厚度Thickness	1.2-5mm
标准Standard	400~680nm 800~1600nm
光洁度Finish	10/5~60/40

滤光片Filter

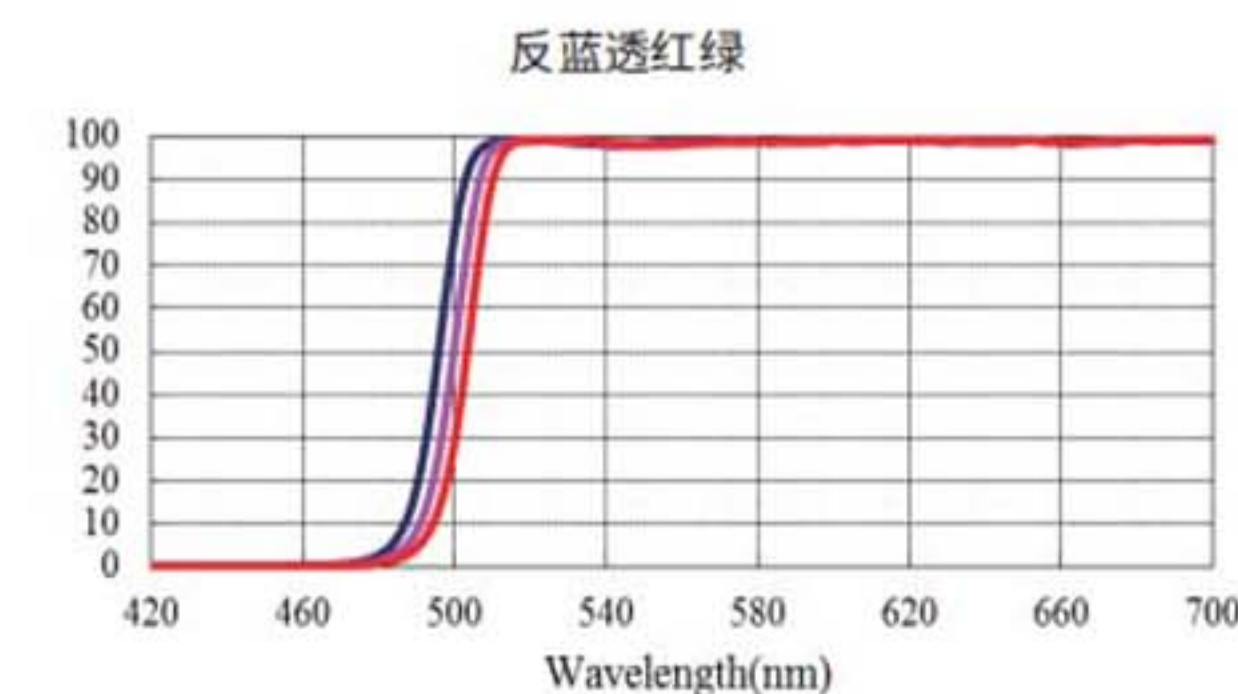

二向色镜Dichroic Mirror

材质Material	Ultra-white glass, K9, B270, BK7
形状Shape	Square, Round, Special Shape
尺寸Size	1-500mm
厚度Thickness	0.3-10mm

入射角Incident Angle	45°
通光孔径Clear Aperture	>95%
环境测试Environmental Test	MIL-STD-810F
截止值Blocking Value	OD3-OD6

滤光片Filter



增透镜Intensifying Lens

材质Material	K9, D263T, B270, BK7, Quartz, Si, Ge, ZnSe, CaF2	厚度公差Thickness Tolerance	$\pm 0.1\text{mm}$
尺寸Size	1-500mm	面形Surface Type	$\lambda/10 \sim \lambda/2$
尺寸公差Size Tolerance	$\pm 0.1\text{mm}$	透光孔径Clear Aperture	>95%
		倒角Chamfer	0.1~0.5mm x 45°

滤光片Filter



偏振镜Polarizer

材质Material	B270	透射率(平均值) Transmittance (average) T	37%
直径Diameter	25mm, 37mm, 40.5mm, 43mm, 49mm	消光比Extinction Ratio	>90:1 (400 - 700 nm)
厚度Thickness	2mm	光洁度Finish	10/5~60/40
工作频带Working Band	400~700nm	镀膜Coating	Custom Design

滤光片Filter




陷波滤光片Notch filter

材质	K9, D263T, B270, BK7, Ultra-white glass
尺寸Size	1-500mm
尺寸公差Size Tolerance	$\pm 0.1\text{mm}$
厚度公差Thickness Tolerance	$\pm 0.1\text{mm}$




滤光片Filter

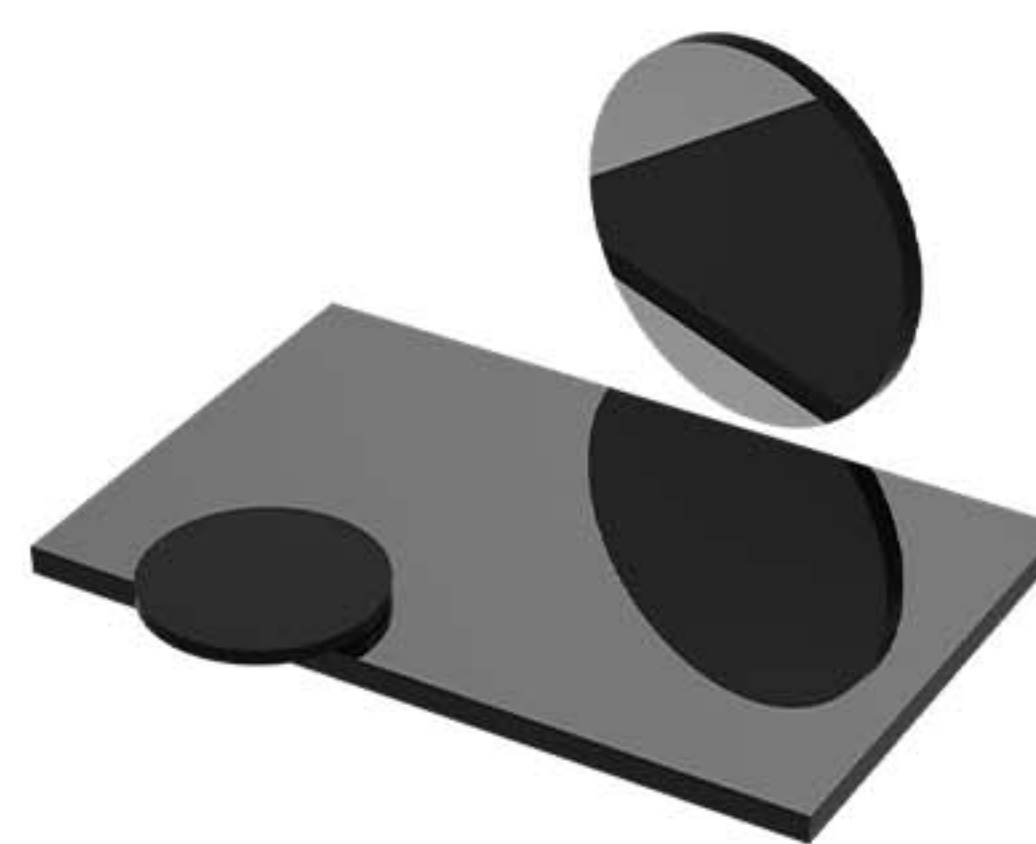

中性密度滤光片Neutral density

材质Material	B270, K9 etc.
尺寸Size	1-500mm
尺寸公差Size Tolerance	$\pm 0.1\text{mm}$
厚度公差Thickness Tolerance	$\pm 0.1\text{mm}$
面形Surface Type	$\lambda/10 \sim \lambda/2$

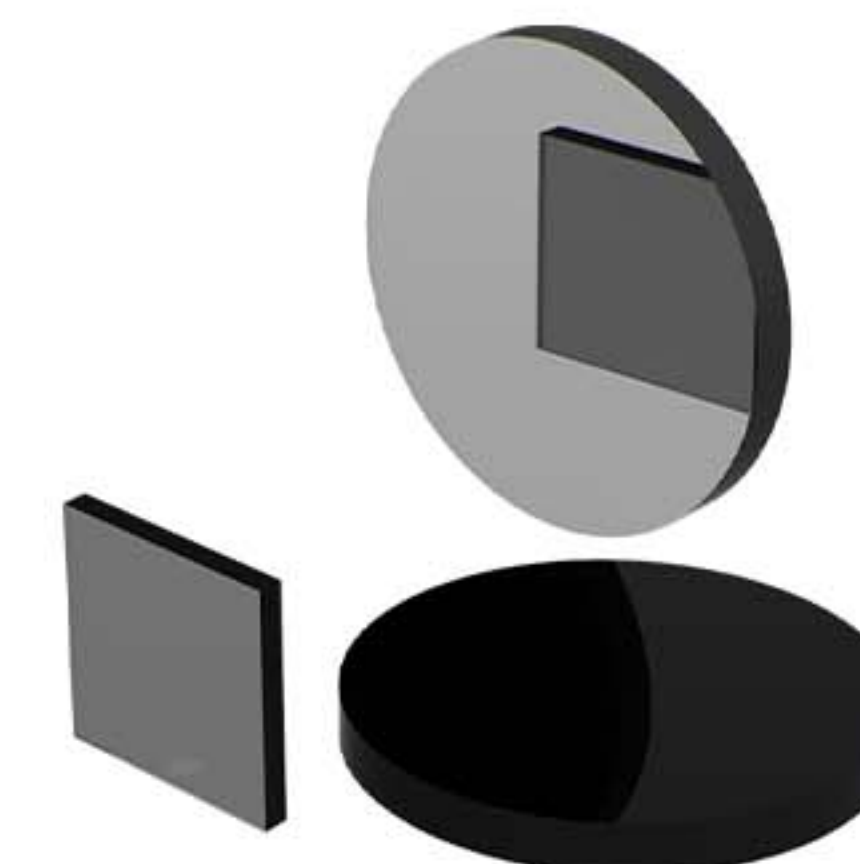

透光孔径Clear Aperture	>95%
倒角Chamfer	0.1~0.5mm x 45°
光洁度Finish	10/5~60/40
透光率公差Transmittance Tolerance	0.01% - 2%
厚度Thickness	0.5 - 5mm

滤光片Filter



远红外滤光片Far Infrared Filter

材质Material	Single Crystal Si, SingleCrystalGe
尺寸公差Size Tolerance	$\pm 0.1\text{mm}$
厚度公差Thickness Tolerance	$\pm 0.1\text{mm}$

面形Surface Type	$\lambda/10 \sim \lambda/2$
通光孔径Clear Aperture	$>95\%$
光洁度Finish	10/5~60/40

窗口片Windows



紫外窗口片UV Window

可见窗口片VIS Window

红外窗口片IR Window

材质Material	BK7, K9, Quartz, Sapphire, Si, Ge, ZnSe, CaF2
尺寸Size	4mm-300mm+0.0/-0.1mm
厚度公差Thickness Tolerance	$\pm 0.1\text{mm}$
光洁度Finish	10/5 ~ 80/50

通光孔径Clear Aperture	$>90\%$
面形Surface Type	$\lambda/10 \sim \lambda/2$
平行度Parallelism	10arc sec~3arc min
倒边Inverted	$<0.2\text{mm}*4.5^\circ$
镀膜Coating	AR Coating or Customer Design

柱面透镜Cylindrical Lens



材质Material	K9、JGS1、CaF2、Si、Ge
焦距Focal Distance	$\pm 5\text{mm} \sim \pm 1000\text{mm} \pm 1\%$
尺寸Size L*W	2-300mm*2-150mm $\pm 0.1\text{mm}$
厚度公差Size Tolerance	$\pm 0.2\text{mm}$
面形Surface Shape	$\lambda/4 \sim \lambda/2$

平凸柱面透镜Plano-convex Cylindrical Lens

双凸柱面透镜Bi-convex Cylindrical Lens

平凹柱面透镜Plano-concave Cylindrical Lens

双凹柱面透镜Bi-concave Cylindrical Lens

弯月柱面透镜Meniscus Cylindrical Lens

非球面柱面透镜Aspherical Cylindrical Lens

圆柱镜(棒镜)Rod Lens

光洁度Finish	10/5-80/50
中心偏差Eccentricity	$<3\text{ arc min}$
通光孔径Clear Aperture	$>90\%$
倒边Inverted	$<0.2\text{mm}*4.5^\circ$
镀膜Coating	AR Coating or Customer Design

球面透镜Spherical Lens



材质Material	K9、JGS1、CaF2、Si、Ge、ZnSe
焦距Focal Distance	$\pm 5\text{mm} \sim \pm 1000\text{mm} \pm 1\%$
尺寸Size	1mm-300mm $\pm 0.1\text{mm}$
厚度公差Thickness Tolerance	$\pm 0.1\text{mm}$
面形Surface Shape	$\lambda/10 \sim \lambda/2$

平凸球面透镜Plano-convex Lens

双凸球面透镜Bi-convex Lens

平凹球面透镜Plano-concave Lens

双凹球面透镜Bi-concave Lens

正弯月球面透镜Positive Meniscus Lens

负弯月球面透镜Negative Meniscus Lens

球透镜Ball Lens

光洁度Finish	10/5-80/50
中心偏差Eccentricity	$<3\text{ arc min}$
通光孔径Clear Aperture	$>90\%$
倒边Inverted	$<0.2\text{mm}*4.5^\circ$
镀膜Coating	AR Coating or Customer Design

非球面透镜Cylindrical Lens



材质Material	K9、JGS1、CaF2、Si、Ge、ZnSe
焦距Focal Distance	$\pm 5\text{mm} \sim \pm 1000\text{mm} \pm 2\%$
尺寸Size	$10\text{mm} - 100\text{mm} \pm 0.2\text{mm}$
厚度公差Thickness Tolerance	$\pm 0.2\text{mm}$
面形Surface Shape	$\lambda/10 \sim \lambda/2$

光洁度Finish	60/40-80/50
中心偏差Eccentricity	$< 5 \text{ arc min}$
通光孔径Clear Aperture	$> 90\%$
倒边Inverted	$< 0.2\text{mm} * 4.5^\circ$
镀膜Coating	AR Coating or Customer Design

胶合透镜Achromatic Doublet Lens




正胶合透镜Positive Achromatic Doublet Lens
胶合透镜Negative Achromatic Doublet Lens
柱面胶合透镜Cylindrical Achromatic Doublet Lens

材质Material	K9、JGS1、CaF2、Si、Ge
焦距Focal Distance	$\pm 5\text{mm} \sim \pm 1000\text{mm} \pm 1\%$
尺寸Size	$2\text{mm} - 100\text{mm} \pm 0.1\text{mm}$
厚度公差Thickness Tolerance	$\pm 0.1\text{mm}$
面形Surface Shape	$\lambda/10 \sim \lambda/2$

光洁度Finish	10/5-80/50
中心偏差Eccentricity	$< 3 \text{ arc min}$
通光孔径Clear Aperture	$> 90\%$
倒边Inverted	$< 0.2\text{mm} * 4.5^\circ$
镀膜Coating	AR Coating or Customer Design

棱镜Prisms

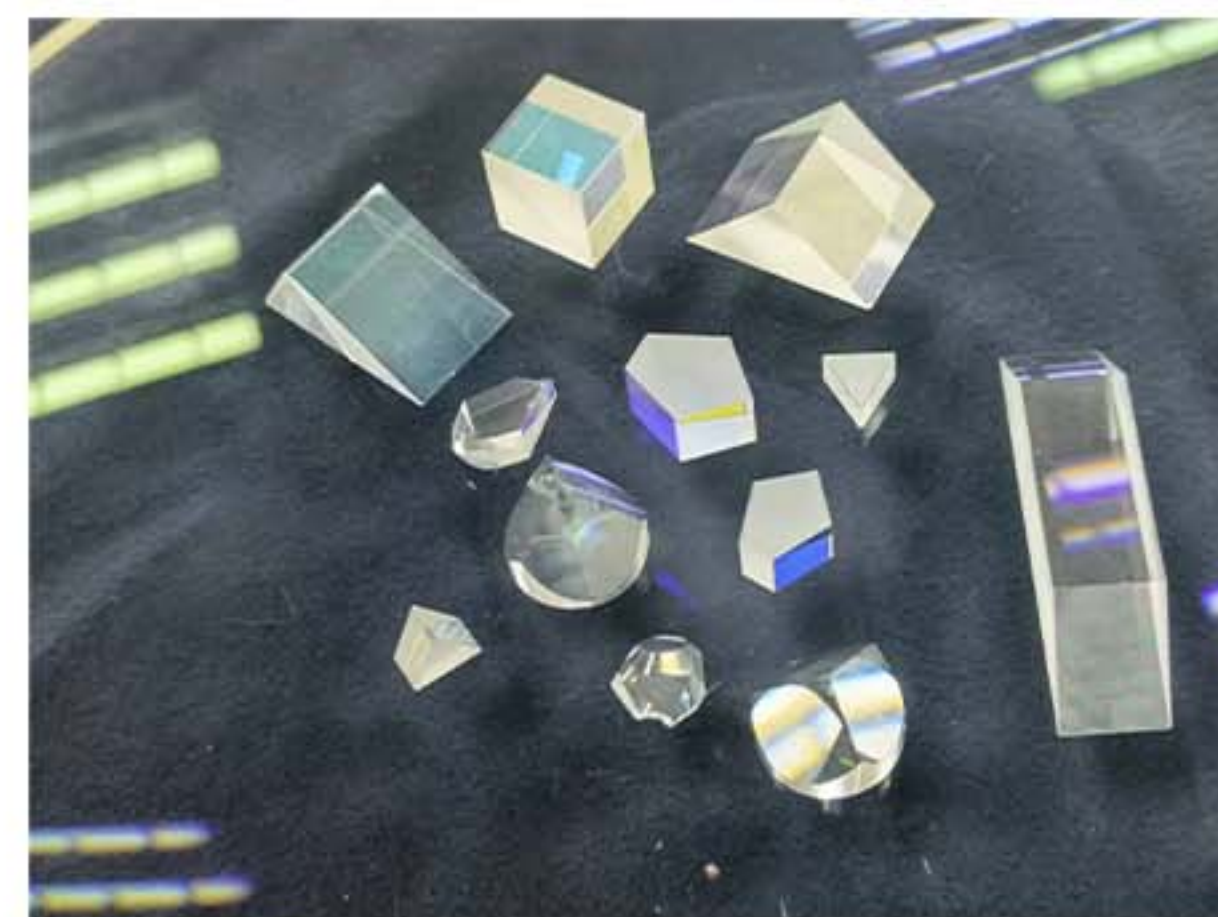


材质Material	K9/石英/蓝宝石/锗/氟化钙/硒化锌等 K9/Quartz/Sapphire/Ge/CaF2/ZnSe
尺寸Size	$4\text{mm} - 150\text{mm} \pm 0.1\text{mm}$
厚度公差Size Tolerance	$\pm 0.1\text{mm}$
面形Surface Shape	$\lambda/10 \sim \lambda/2$

直角棱镜Right-angle Prism
楔形棱镜Wedge Prism
角锥Pyramid Prism
道威棱镜Dove Prism
屋脊棱镜Roof Prism
五角棱镜Penta Prism
等边棱镜Equilateral Prism
立方体棱镜Cube Prism

光洁度Finish	10/5-80/50
中心偏差Eccentricity	$3 \text{ arc sec} \sim 3 \text{ arc min}$
通光孔径Clear Aperture	$> 90\%$
倒边Inverted	$< 0.2\text{mm} * 4.5^\circ$
镀膜Coating	AR Coating or Customer Design

波片Wave Plate

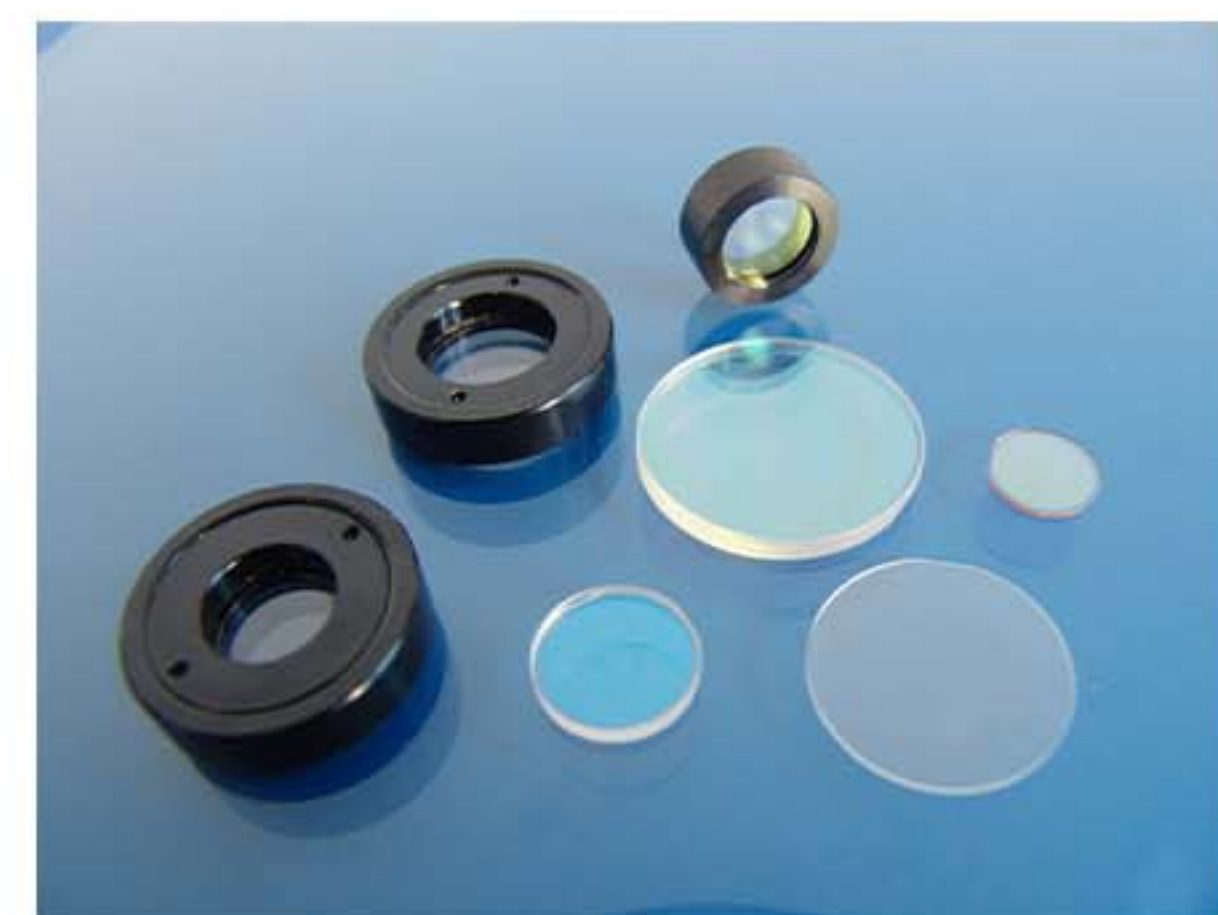

材料Material	Quartz Crystal
尺寸Size	$10\text{mm} - 20\text{mm} + 0.0 / - 0.1\text{mm}$
厚度公差Size Tolerance	$\pm 0.1\text{mm}$
平行度Parallelism	$< 2''$
面形Surface Shape	$\lambda/4 \sim 1\lambda$

零级波片Zero-order Wave Plate
真零级波片True Zero-order Wave Plate
多级波片Multi-stage Wave Plate
消色差波片Achromatic Wave Plate

光洁度Finish	10/5~60/40
通光孔径Clear Aperture	$> 90\%$
倒边Inverted	$< 0.2\text{mm} * 4.5^\circ$
镀膜Coating	AR Coating or Customer Design
延迟精度Delay accuracy	$\lambda/60 - \lambda/6000$

金属反射镜Metallic Mirror



平面反射镜Flat Reflector
球面反射镜Spherical Reflector
柱面反射镜Cylindrical Reflector
非球面反射镜Aspherical Reflector

紫外增强铝Al (UV) Rmax	>85% 200nm-350nm
可见保护铝Al (VIS) Rmax	>90% 400nm-750nm
保护银Ag (NIR) Rmax	>97% 500nm-12um
保护金Au (NIR) Rmax	>99% 700nm-14um
外形公差Shape Tolerance	+0.0/-0.1mm

厚度公差Thickness Tolerance	±0.1mm
光洁度Finish	10/5~60/40
有效孔径Effective Aperture	>90%
面形Surface Shape	$\lambda/10 \sim \lambda/2$
倒边Inverted	<0.2mm*4.5°

介质膜反射镜Dielectric Film Mirror



紫外UV	185-350nm 可见
VIS	380-700nm
红外IR	800-14nm
反射率Reflectivity	R>99%-99.5%
入射角AOI	0°-45°
带宽Bandwidth	±5nm-7000nm
中心波长偏差CWL Tolerance	±5nm

外形公差Shape Tolerance	+0.0/-0.1mm
厚度公差Thickness Tolerance	±0.1mm
光洁度Finish	10/5~60/40
有效孔径Effective Aperture	>90%
面形Surface Shape	$\lambda/10 \sim \lambda/2$
倒边Inverted	<0.2mm*4.5°
直径diameter	1-200mm

红外元件Infrared




锗透镜Ge Lens
硅透镜Si Lens
硒化锌透镜ZnSe Lens
氟化钙透镜CaF2 Lens

材料Material	Ge, Si, Znse, CaF2
直径Diameter	10mm~100mm
厚度公差Thickness Tolerance	±0.1mm
曲率半径Radius	±10mm~±1000mm
面形Surface Shape	$\lambda/2 \sim 2\lambda$

光洁度Finish	10/5~60/40
中心偏差Eccentricity	3 arc sec~3 arc min
通光孔径Clear Aperture	>90%
倒边Inverted	<0.2mm*4.5°
镀膜Coating	Customer Design

分划板Reticles

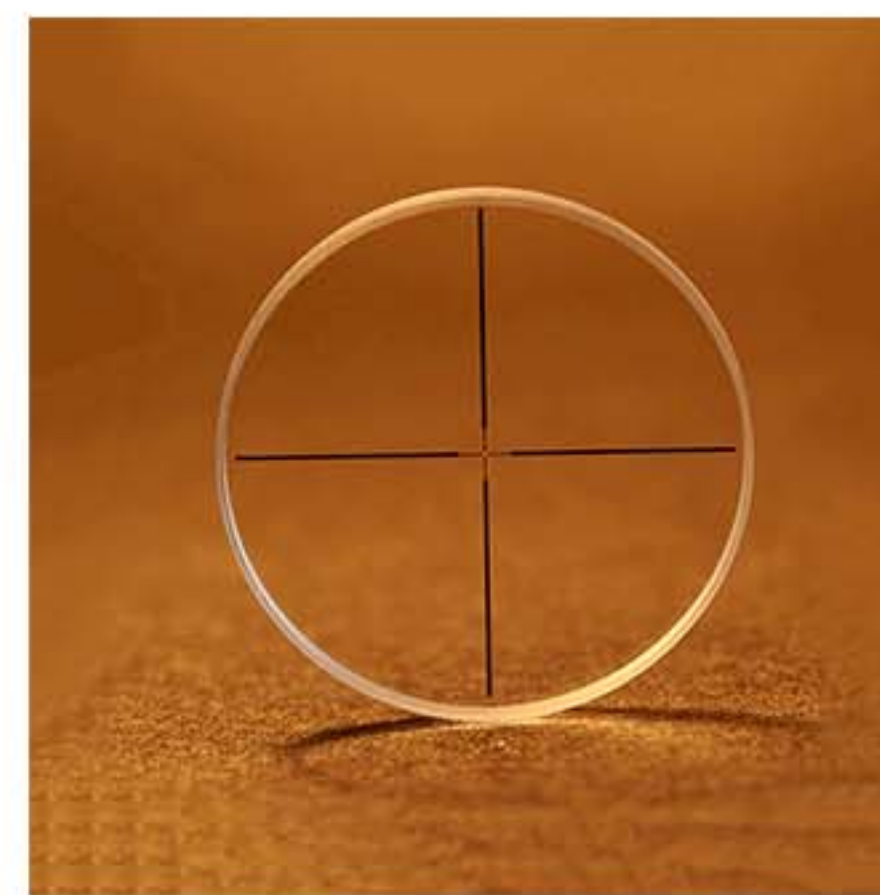

十字线分划板Plain Crosshair Reticle
角度分划板Angle Reticle
网格分划板Grid Reticle

材料Material	BK7, B270
尺寸Size	15-40mm+0.0/-0.1mm
厚度公差Size Tolerance	1-4mm, ±0.1mm
面形Surface Shape	$\lambda/10 \sim \lambda/2$

光洁度Finish	10/5-60/40
通光孔径Clear Aperture	>90%
倒边Inverted	<0.2mm*4.5°
镀膜Coating	AR Coating or Customer Design


激光扫描镜Laser Scanning Mirror



标准扫描镜Standard Scanning Mirror

入射角度 Incidence Angle (°)	长度 Length (mm)	宽度 Width (mm)	中心厚度 Centre Thickness (mm)	工作波段 Wavelength (nm)
22.5±10	40	20	3	915+650
41±11	60	57	6	1064+650
45±11	60	39	6	915+650
45±11	54	38	5	1064+650+468
45±11	36	36	5.45	1064+650
45±11	76	20	5	1064+468



激光扫描镜Laser Scanning Mirror

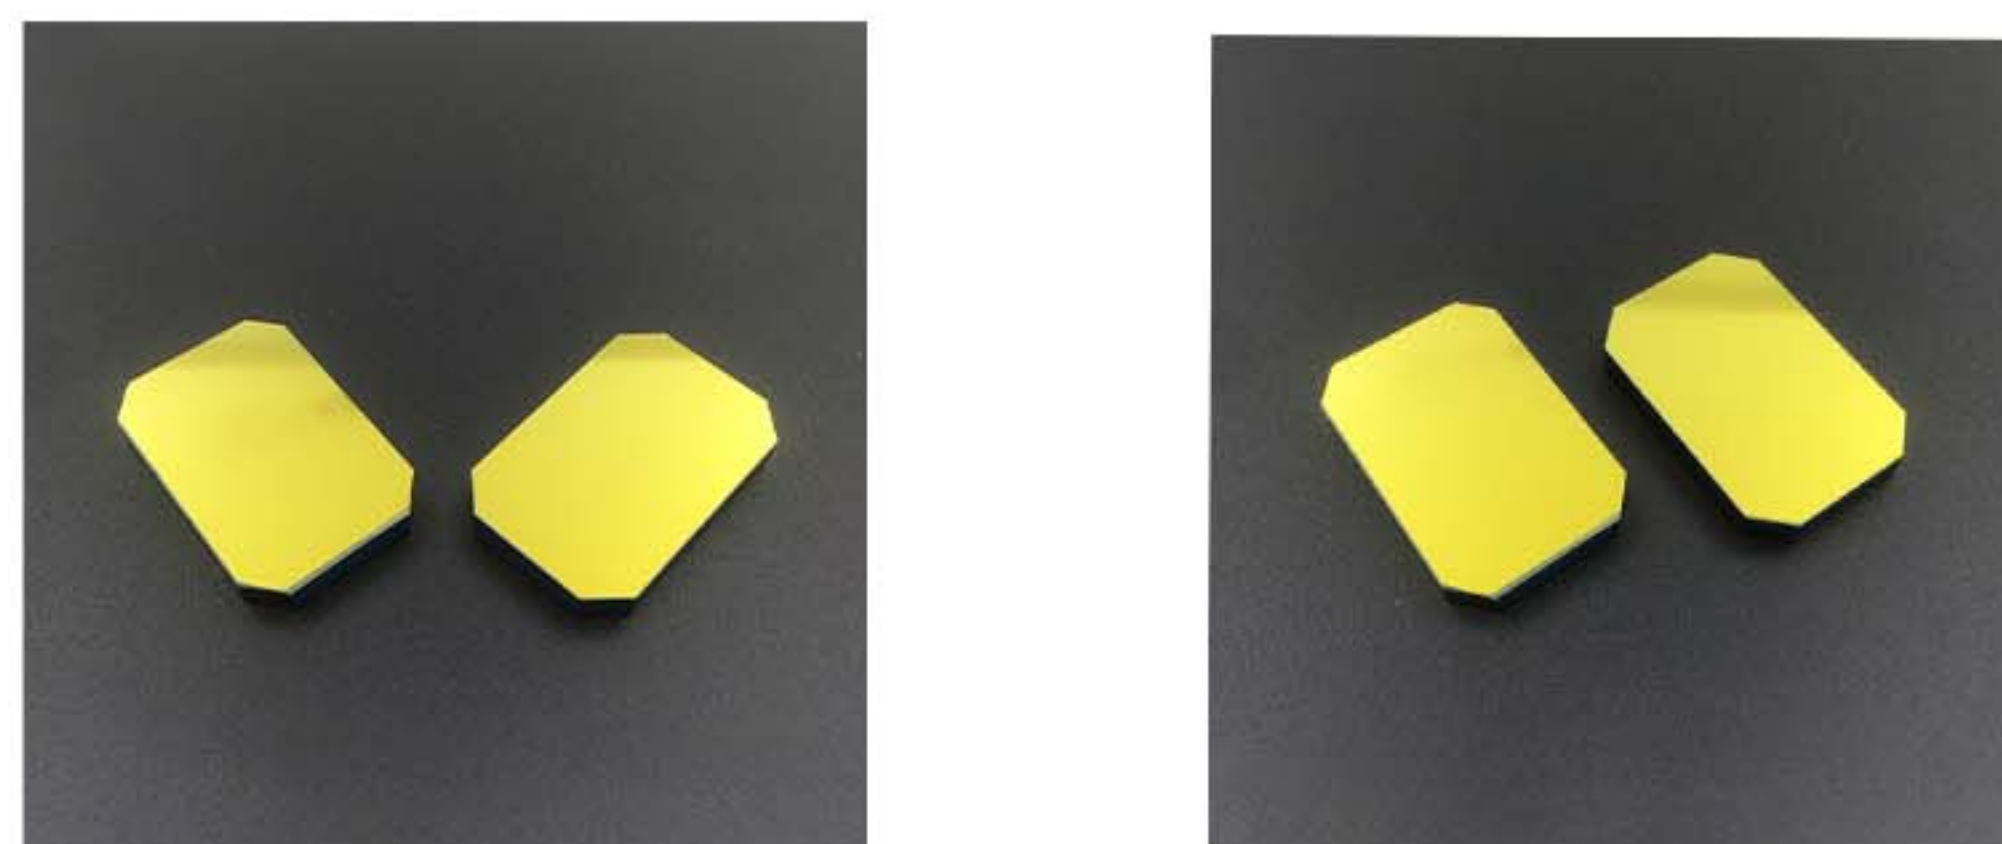

硅扫描镜Si Scanning Mirror

入射角度 Incidence Angle (°)	长度 Length (mm)	宽度 Width (mm)	中心厚度 Centre Thickness (mm)	工作波段 Wavelength (nm)
45±10	20	16	1.05	1064+650
45±10	29	17	1.05	1064+650
45±10	22	18	2	1064+650
45±10	32	19	2	1064+650

分光片Splitter

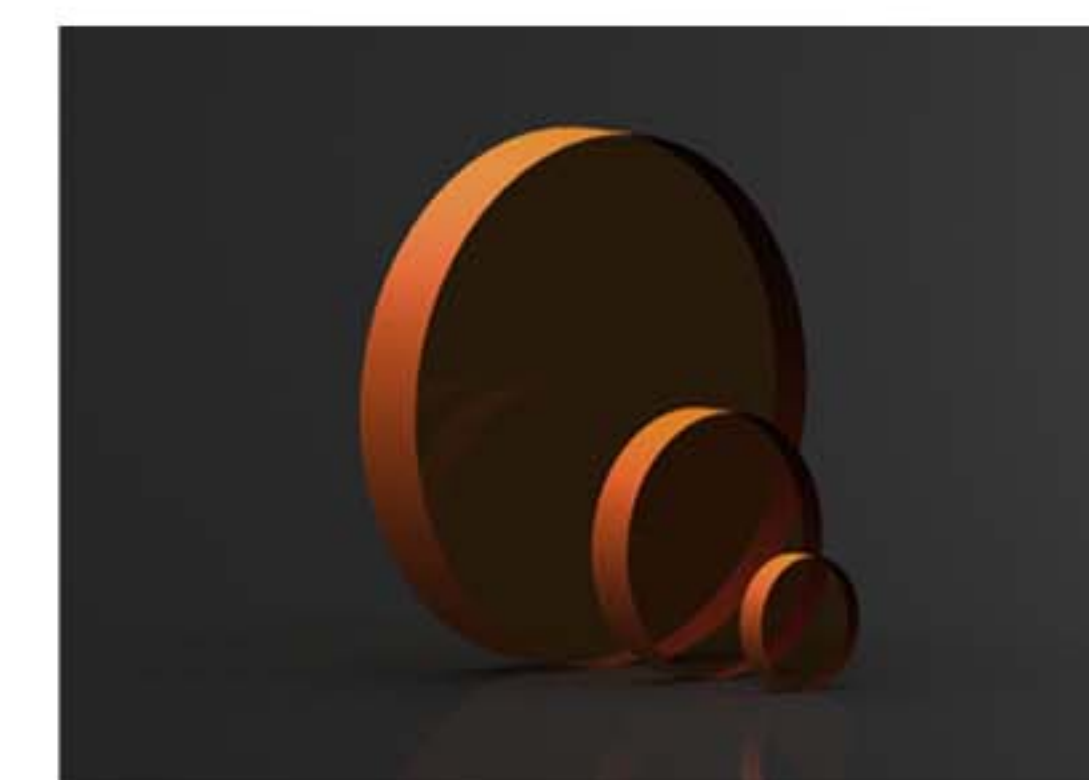
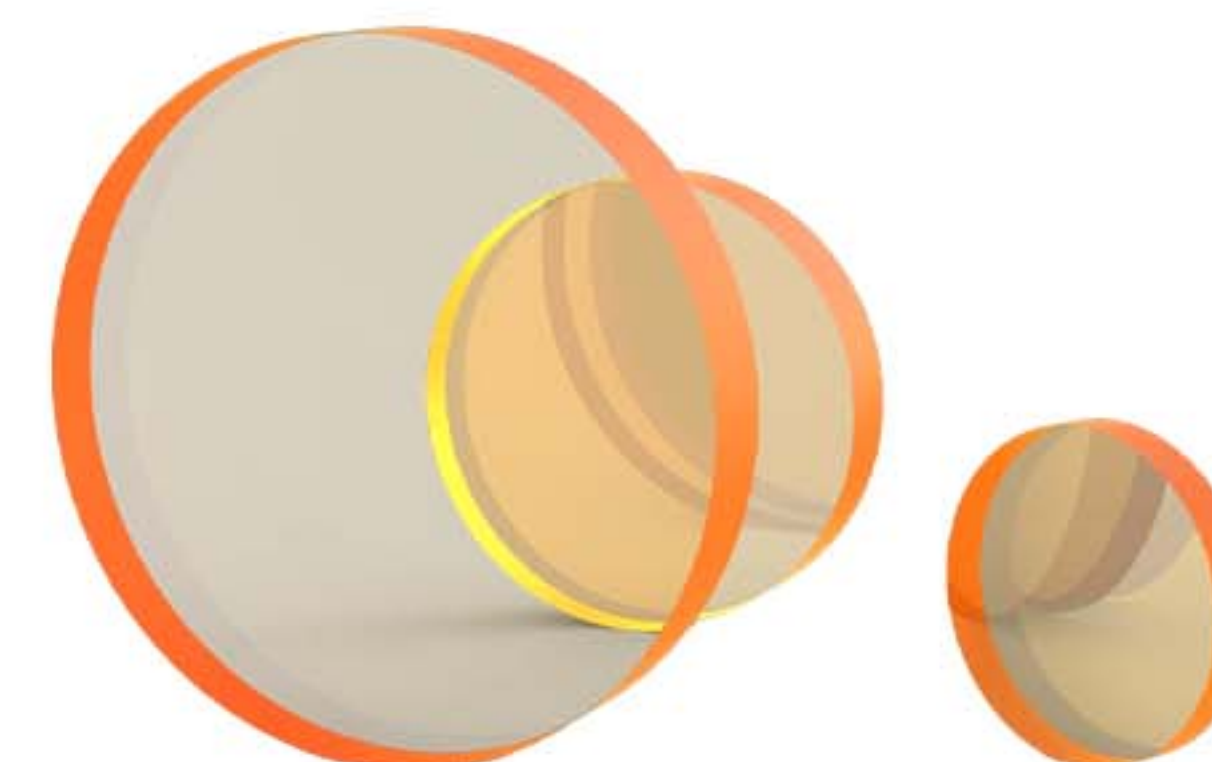


红外分光片Infrared Spectrometer

面形Surface Shape	$\lambda / 4 @ 633 \text{ nm}$
楔角Wedge Angle	30±10弧分arc minutes
表面光洁度Finish	40-20
有效孔径Effective Aperture	>90%

尺寸误差Size Error	+0/-0.25 mm
厚度Thickness	±0.25 mm
倒边Chamfer	0.2~0.5 mm X 45°
分光比例R/T	50/50

分光片Splitter

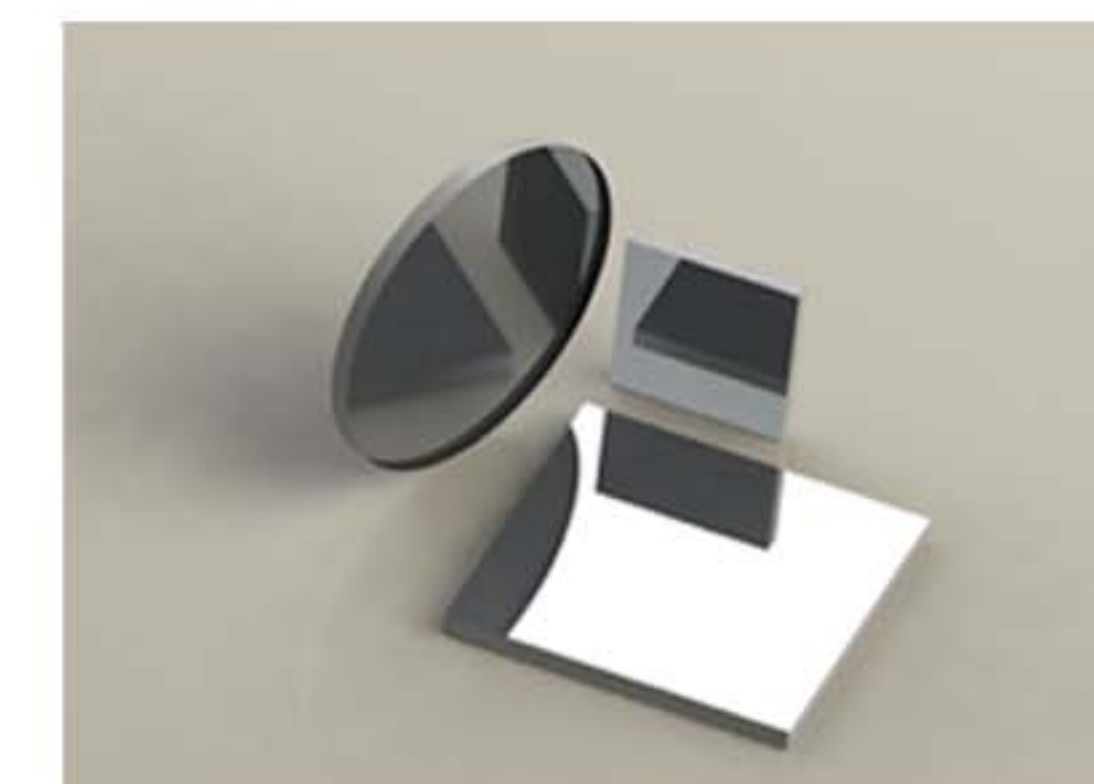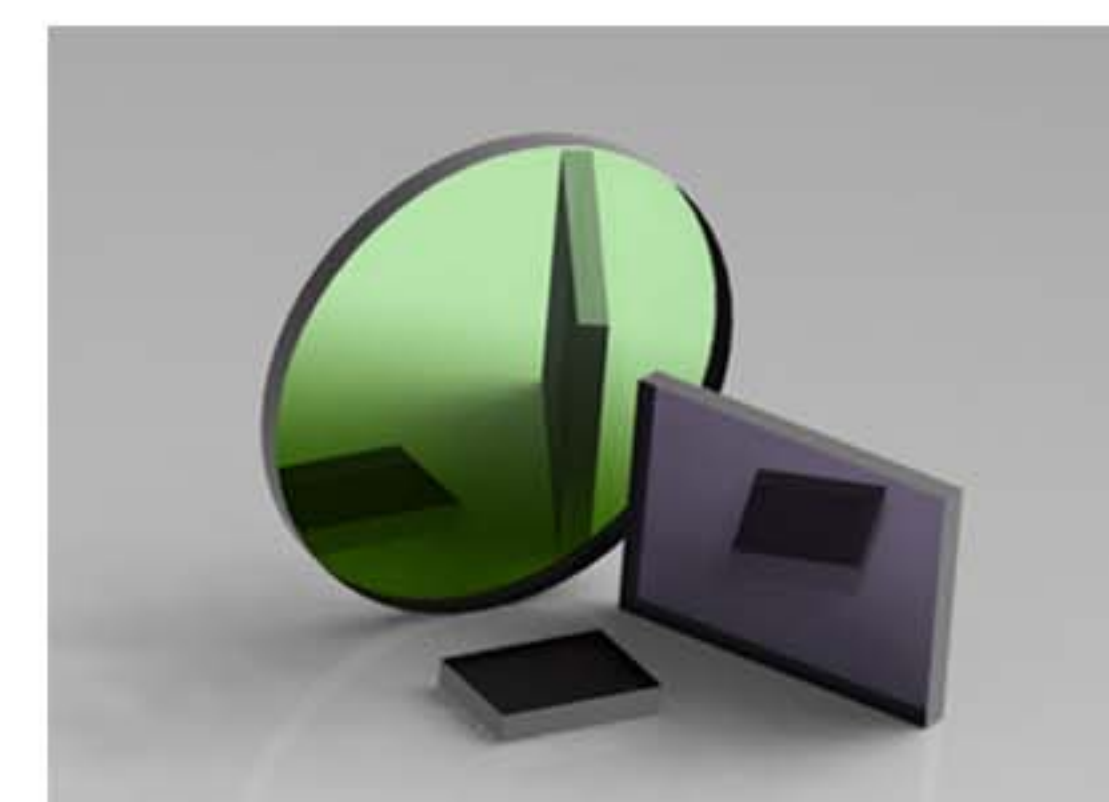


镀铝点阵分光片Aluminized Dot Matrix

材料Material	K9
面形Surface Shape	$\lambda / 2$ (每英寸inch) @ 633 nm
平行差Parallel Difference	<1分minute
光洁度Finish	10/5~60/40
有效孔径Effective Aperture	>85%

厚度Thickness	3mm ± 0.2 mm
分光比Splitting Ratio(R/T)	± 5% @ 350~2000 nm
镀膜Coating	镀铝Aluminized, 透光小孔0.25mm点阵 Dot Matrix With Light-transmitting Holes
小光束直径Small Beam Diameter	>5 mm

分光片Splitter

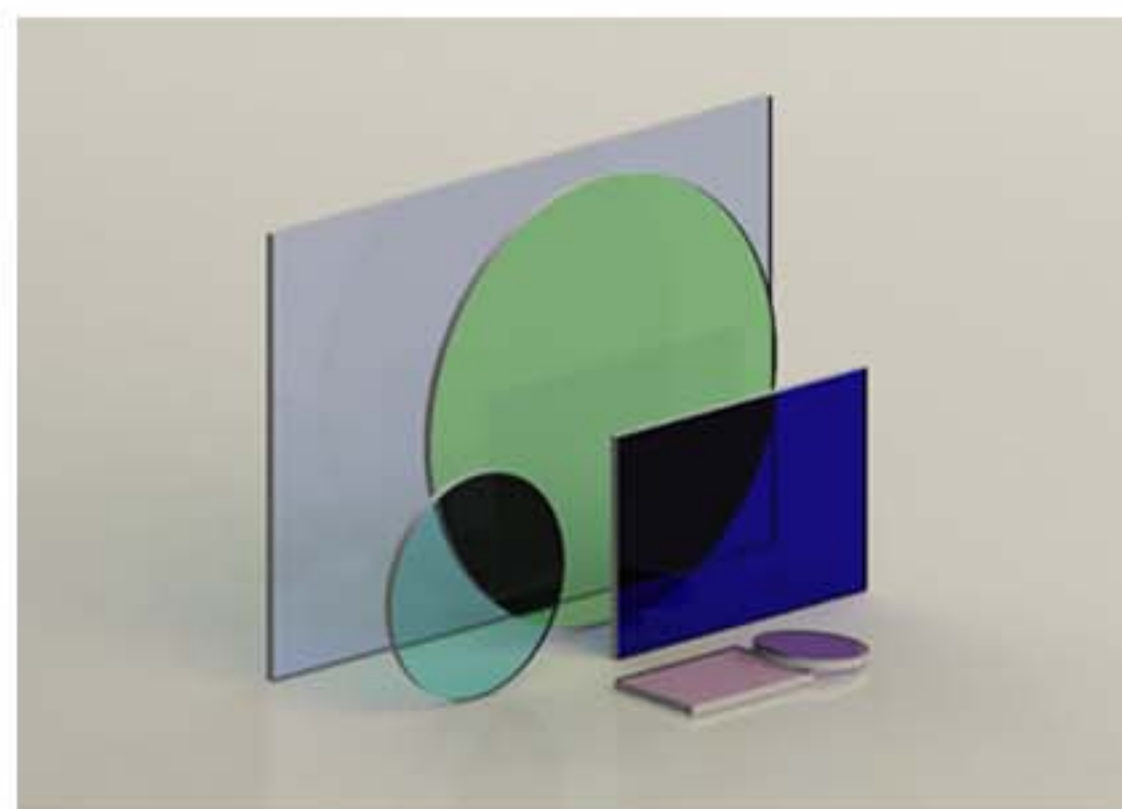

经济型宽带分光片Economical Broadband Splitter

材料Material	B270	尺寸误差Size Error	+0.0/-0.25mm
面形Surface Shape	4~8 λ /英寸inch	厚度Thickness	± 0.2 mm
平行差Parallel Difference	< 弧分arc minutes3	倒边Chamfer	切割边缘Cutting Edge
光洁度Finish	10/5~60/40	镀膜Coating	AR Coating or Customer Design
有效孔径Effective Aperture	>90%	分光比例R/T	50/50

晶体Crystals



BBO 非线性晶体BBO Nonlinear Crystal

定位精度Positioning Accuracy	<30 arc min	垂直度误差Verticality Error	<5 arc min
透明孔径Transparent Aperture	>90%	倒角Chamfer	<0.1 mm at 45°
面尺寸公差Face size Tolerance	+0/-0.1mm	表面质量Surface Quality	10-5 S-D
平行度误差Parallelism Error	<20 arc sec	面形Surface Shape	$\lambda/10 \sim \lambda/2$

晶体Crystals



LBO 非线性晶体LBO Nonlinear Crystal

定位精度Positioning Accuracy	<30 arc min	垂直度误差Verticality Error	<10 arc min
透明孔径Transparent Aperture	>90%	倒角Chamfer	<0.1 mm at 45°
面尺寸公差Face Size Tolerance	+0/-0.1mm	表面质量Surface Quality	10-5 S-D
长度公差Length Tolerance	± 0.1 mm	面形Surface Shape	$\lambda/10 \sim \lambda/2$
平行度误差Parallelism Error	<20 arc sec	可透光波段Transmissible wavelength	160—2600nm

晶体Crystals



YVO4 晶体YVO4 Crystal

定向Orientation	<30 arc min	面形Surface Shape	$\lambda/10 @ 633\text{nm}$
平行度Parallelism	<10 second	光洁度Finish	10/5~60/40
垂直度Verticality	<5 minute	Nd掺杂浓度D/C	0.1%~3%

镜头器件Lens Device

扩束镜Beam Expander

G-型-固定倍率水冷扩束镜
Type G-fixed Water-cooling Beam Expander

波长Wavelength	1064nm
放大倍数Magnification	2.5x, 3-5x
入射口径In. Aperture	10mm
出射口径Out. Aperture	33mm
最大镜筒外径Max Lens- Φ	54mm, 68mm
镜头长度Lens Length	74.5mm, 91.5mm, 104.53mm, 108mm
连接方式Thread	M22x0.75 Φ42

镜头器件Lens Device

扩束镜Beam Expander

H-型-可调发散角水冷扩束镜
Type H-Adjustable Water-cooling Beam Expander

波长Wavelength	1064nm
放大倍数Magnification	3x, 4x
入射口径In. Aperture	10mm
出射口径Out. Aperture	33mm
最大镜筒外径Max Lens- Φ	54mm
镜头长度Lens Length	101.5mm
连接方式Thread	M30x1
波长Wavelength	10.6um
放大倍数Magnification	4x, 6x, 8x
入射口径In. Aperture	8mm, 10mm
出射口径Out. Aperture	33mm
最大镜筒外径Max Lens- Φ	54mm
镜头长度Lens length	101.5mm
连接方式Thread	M30x1

镜头器件Lens Device

F - θ 场镜Field Lens



平场扫描镜F-θ Lens

材质Material	石英Fused Silica
波长Wavelength	355nm, 405nm, 532nm, 915nm, 1064nm, 1940nm

镜头器件Lens Device

F - θ 场镜Field Lens



远心平场扫描镜Telecentric F-θ Lens

材质Material	石英Fused Silica
波长Wavelength	355nm, 532nm, 1550nm, 1064nm, 1940nm

镜头器件Lens Device

F - θ 场镜Field Lens



平场扫描镜F-θ Lens

材质Material	光学玻璃Optical Glass
波长Wavelength	532nm, 780-980nm, 1064nm

镜头器件Lens Device

F - θ 场镜Field Lens远心平场扫描镜Telecentric F- θ Lens

材质Material	光学玻璃Optical Glass
波长Wavelength	532nm, 980nm, 1064nm

镜头器件Lens Device

F - θ 场镜Field Lens消色差平场扫描镜Achromatic F- θ Welding Lens

可将1064nm波段激光的工作焦平面与CCD监控的可见光焦平面重合，从而实现CCD全视场范围焊接（同轴视觉）的清晰抓像。

Achromatic F- θ Lens are sophisticated to minimise the distance between 1064nm laser marking field and CCD monitoring field, which allows a full-field CCD monitoring during laser welding.

波长Wavelength	355nm, 532nm, 915nm, 1064nm
--------------	-----------------------------

镜头器件Lens Device

F - θ 场镜Field Lens平场扫描镜F- θ Lens

适用于CO₂激光器的平场扫描镜，其材料为ZnSe晶体，通过波段主要为9.3 μ m-10.6 μ m F- θ Lens made from ZnSe materials are suitable for CO₂ laser application, which wavelength features from 9.3 μ m - 10.6 μ m

材质Material	ZnSe
波长Wavelength	10.6 μ m

镜头器件Lens Device

隔离器
Isolator

隔离器是一种采用线性光耦隔离原理，将输入信号进行转换输出。输入，输出和工作电源三者相互隔离，特别适合与需要电隔离的设备仪表配用。隔离器又名信号隔离器，是工业控制系统中重要组成部分。

Isolator is a kind of linear optocoupler isolation principle, the input signal is converted and output. Input, output and working power are isolated from each other, which is especially suitable for equipment and meters that need electrical isolation. The isolator, also known as the signal isolator, is an important part of the industrial control system.

镜头器件Lens Device

偏振器Polarizer



偏光器是使平面偏振光垂直相交，光线通不过的原理制造的一种简单的光学仪器。

The polarizer is a simple optical instrument made by the principle that plane polarized light intersects perpendicularly and the light cannot pass through.

镜头器件Lens Device

环形器Circulator



环形器是一种使电磁波单向环形传输的器件，在近代雷达和微波多路通信系统中都要用单方向环行特性的器件。Circulator is a device that makes electromagnetic waves transmit in a one-way ring shape. In modern radar and microwave multiplex communication systems, devices with unidirectional ring characteristics are used.

镜头器件Lens Device

准直器Collimator



属于光纤通信光器件的用于输入输出的一个光学元件，其结构很简单—光纤传出的发散光通过前置的类似凸透镜变成平行光（高斯光束）。它的作用是使光最大效率的耦合进入所需的器件中或易如接受光信号最大效率的接受。

An optical element used for input and output belonging to optical fiber communication optical devices, and its structure is very simple—the divergent light from the optical fiber becomes parallel light (Gaussian beam) through a front similar convex lens. Its function is to make the coupling of light into the required device with maximum efficiency or as easy as receiving the optical signal with maximum efficiency.

镜头器件Lens Device

光纤跳线Fiber Jump Rope



应用场景：光纤通信系统、光纤入户、光纤数据传输、光纤CATV、局域网(LAN)、光学测试设备、光纤传感器。
Application: optical fiber communication system, optical fiber to the home, optical fiber data transmission, optical fiber CATV, local area network (LAN), optical test equipment, optical fiber sensor.

镀膜介绍

上海京盛是精密光学元件和激光晶体元件的专业制造商。我们可以根据您的详细要求、图纸或样品定制各种光学元件，也可以提供单独的镀膜，如增透膜、激光镀膜、高反镀膜、半透半反镀膜、红外和紫外镀膜，公司有通过ISO9001质量体系认证，拥有先进的生产和检测设备，满足客户一站式产品采购需求，提供光学解决方案。

生产过程



粗磨车间




古典抛光



环抛车间



双面抛光车间

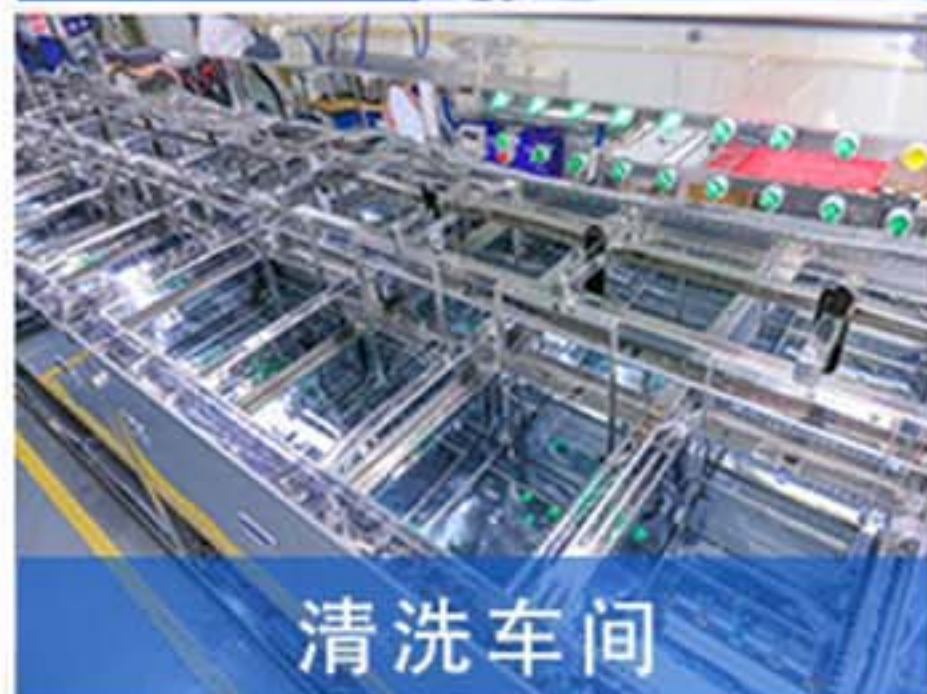

清洗车间



样板间



镀膜车间




检测设备



检测车间

展会

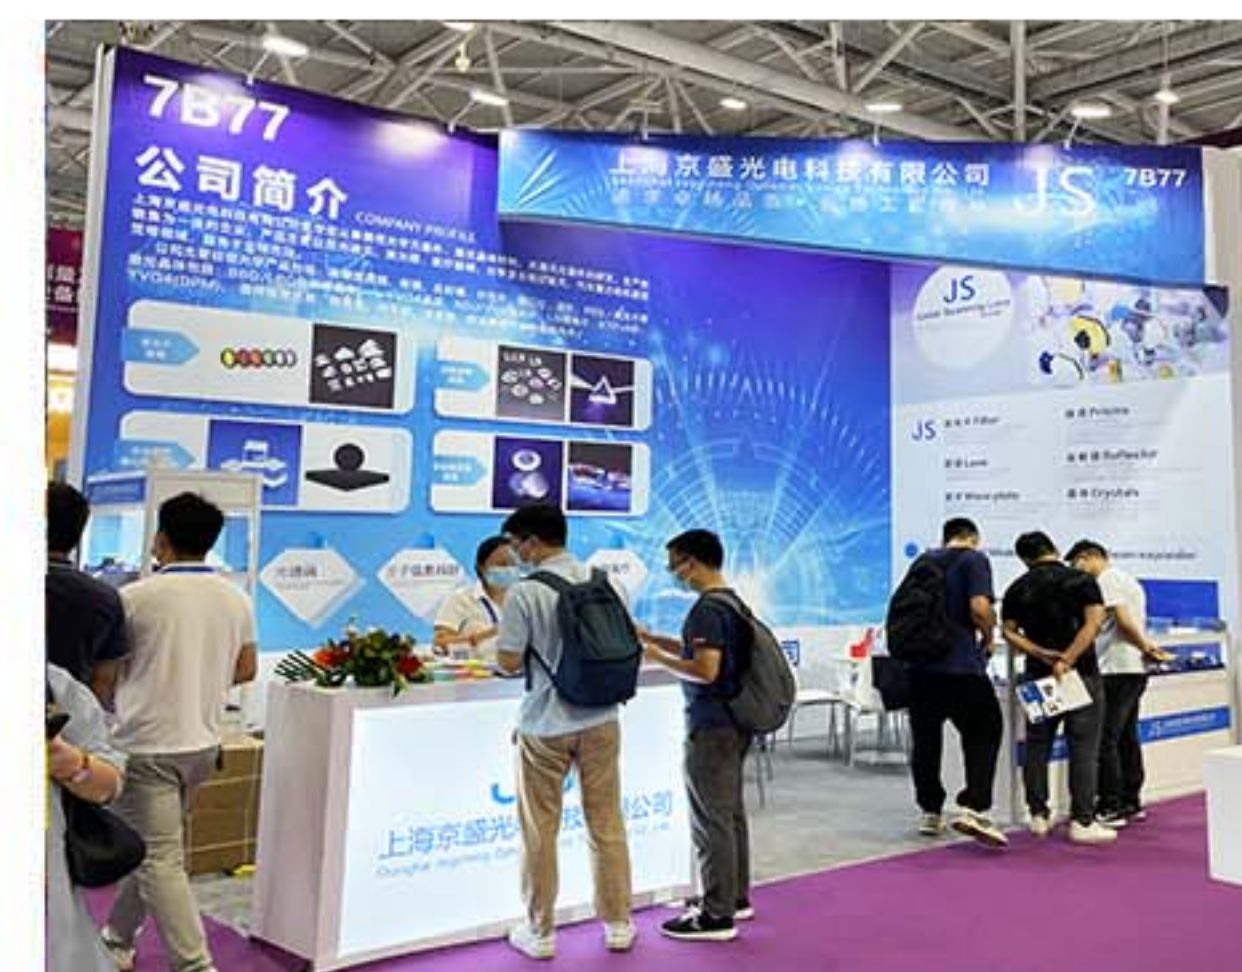

我们的优势




我们的优势

公司主要生产包括高精度透镜、棱镜、反射镜、窗口片、分光片、波片、滤光片等，满足不同客户需求。



严格质量控制

公司通过ISO9001:2015质量体系认证，拥有先进的检测设备，主要设备包括Zygo干涉仪，分光光度计等。

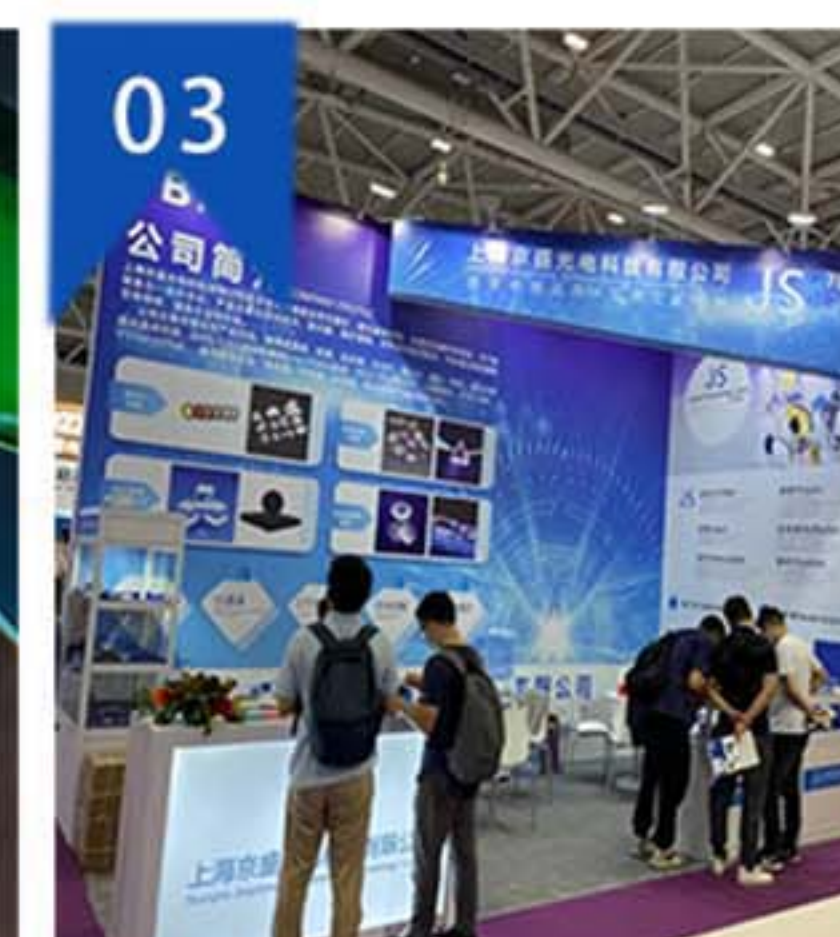

合作共赢

公司以客户为中心，产品销往多个国家，与客户建立了良好的长期合作关系，凭借优质的产品获得良好的声誉。