


Art. 335系列双由令U-PVC三通自控球阀
Art.335 series double union U-PVC three ways actuated ball valve



两通, PN10, 双由令活接.
Two ways, PN10, union socket ball valve

产品特性 SPECIFICATIONS

- ★工作压力: PN10
Working Pressure :PN10
- ★温度范围: 15℃ ~+55℃
Temperature Range:15℃ ~+55℃
- ★适用介质: 水、油、气及某些腐蚀性液体
Suitable medium: water,oil,air and some corrosive liquid

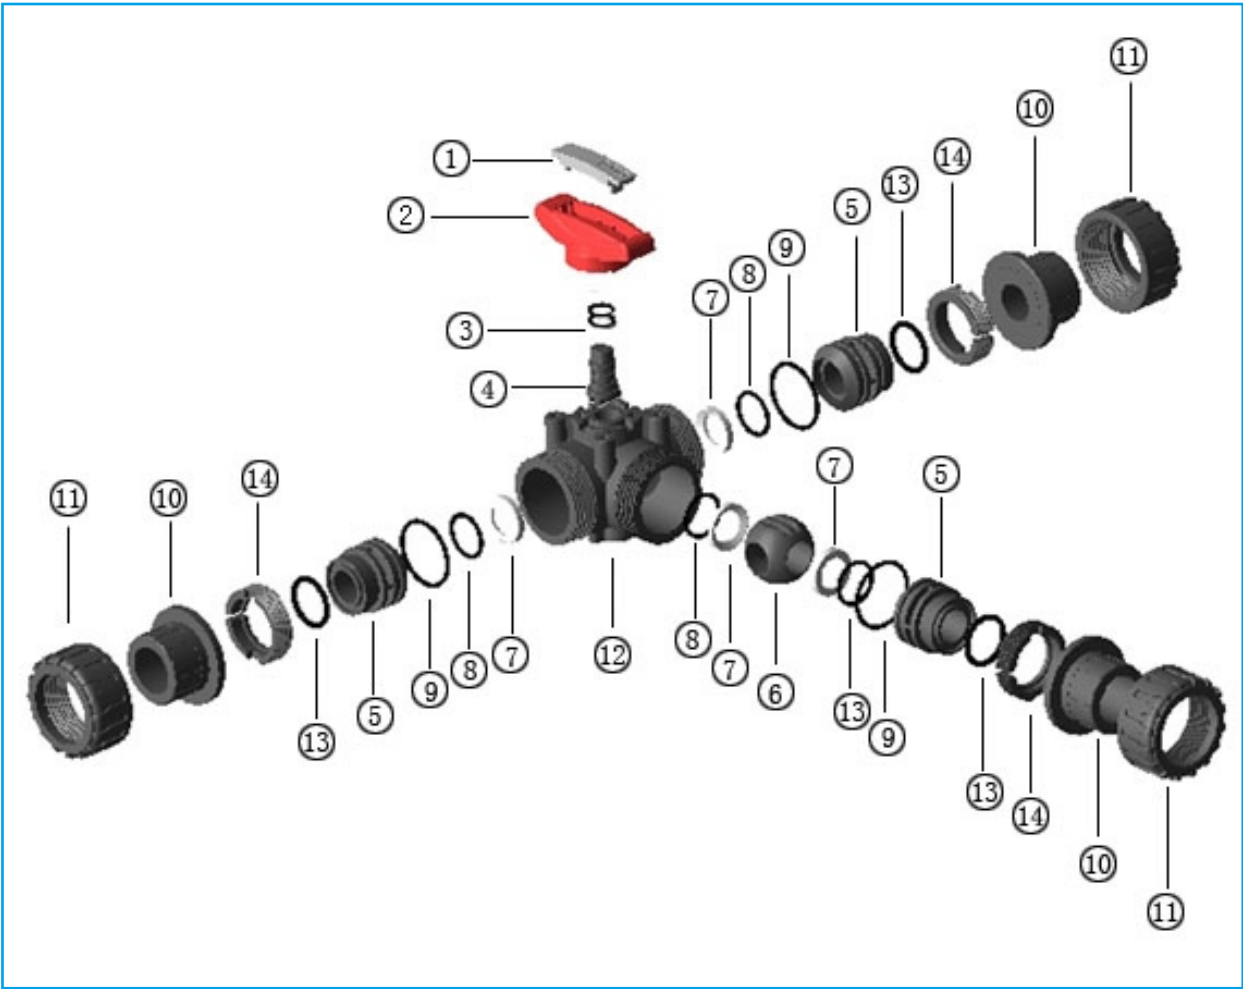

序号 NO.	零件名称 PART NAME	材质 MATERIAL	数量 QUANTITY	单位 UNTIS
1	手柄盖 CAP	PVC	1	PC
2	手柄 HANDLE	PVC	1	PC
3	O形圈 O-RING	EPDM	2	PCS
4	阀杆 STEM	PVC	1	PC
5	阀座载体 SEAL CARRIER	PVC	3	PCS
6	阀球 BALL	PVC	1	PC
7	阀座 SEAT SEAL	PTFE	4	PCS
8	O形圈 O-RING	EPDM	4	PCS
9	O形圈 O-RING	EPDM	3	PCS
10	终端接头 END CONNECTOR	PVC	3	PCS
11	活接头螺母 UNION NUT	PVC	3	PCS
12	阀体 BODY	PVC	1	PC
13	O形圈 O-RING	EPDM	3	PCS
14	止动环 SNAP RING	PVC	3	PCS

Art. 335系列双由令U-PVC气动三通球阀

ADESUN

Art. 335 series double union U-PVC pneumatic three ways ball valve



阀体/Body: U-PVC

阀座/Seat: PTFE

连接/Connection: 由令活接/Union socket (GB, ANSI, DIN, JIS)

(可选/Optional: 螺纹/Thread、法兰/Flange)

配 **ADESUN** 气动执行器/with **ADESUN** pneumatic actuator

可提供 "L" 型或 "T" 型号流向选择/ "L" or "T" port

尺寸: 1/2"-2"/Size: 1/2"-2"

Art: 335L(T)***G - ****

口径 特别代码

双动/Double acting


型号 CODE	334L(T)D015G - CCNY	334L(T)D020G - CCNY	334L(T)D025G - CCNY	334L(T)D032G - CDNY	334L(T)D040G - CDNY	334L(T)D050G - CCNY
DN	15	20	25	32	40	50
PN	10	10	10	10	10	10
ACT	ACD050	ACD050	ACD050	ACD063	ACD063	ACD063
H (mm)	181	181	195	213	249	249
L1 (mm)	163	172	200	208	240	246
L2 (mm)	154.5	154.5	154.5	168	168	168
参考重量 (KG)	1.6	1.7	1.8	2.5	2.85	3.5
¥						

Art: 335L(T)S***G - ****

口径 特别代码

单动/Spring return

型号 CODE	334L(T)S015G - CCNY	334L(T)S020G - CCNY	334L(T)S025G - CDNY	334L(T)S032G - CDNY	334L(T)S040G - CDNY	334L(T)S050G - CDNY
DN	15	20	25	32	40	50
PN	10	10	10	10	10	10
ACT	ACS050	ACS050	ACS063	ACS063	ACS063	ACS075
H (mm)	181	181	195	213	249	271
L1 (mm)	163	172	200	208	240	246
L2 (mm)	154.5	154.5	168	168	168	219
参考重量 (KG)	1.7	1.8	1.9	2.7	3	5.2
¥						

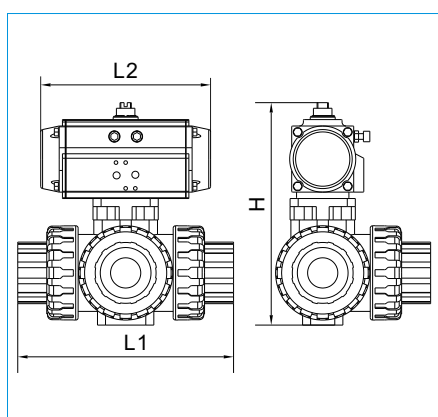

阀体/Body: U-PVC

阀座/Seat: PTFE

连接/Connection: 由令活接/Union socket (GB, ANSI, DIN, JIS)

(可选/Optional: 螺纹/Thread、法兰/Flange)

配 **VALBIA** 气动执行器/with **VALBIA** pneumatic actuator

可提供 "L" 型或 "T" 型号流向选择/ "L" or "T" port

尺寸: 1/2"-2"/Size: 1/2"-2"

Art: 335L(T)D***G - ****

口径 特别代码

双动/Double acting


型号 CODE	334L(T)D015G - VANY	334L(T)D020G - VANY	334L(T)D025G - VCNY	334L(T)D032G - VCNY	334L(T)D040G - VCNY	334L(T)D050G - VCNY
DN	15	20	25	32	40	50
PN	10	10	10	10	10	10
ACT	DA32	DA32	DA52	DA52	DA52	DA52
H (mm)	165	165	216	216	252	252
L1 (mm)	163	172	200	208	240	246
L2 (mm)	110	110	141	141	141	141
重量 (KG)	1	1.1	1.8	2.1	3	3.6
¥						

Art: 335S***G - ****

口径 特别代码

单动/Spring return

型号 CODE	334L(T)S015G - VCNY	334L(T)S020G - VCNY	334L(T)S025G - VCNY	334L(T)S032G - VDNY	334L(T)S040G - VDNY	334L(T)S050G - VENY
DN	15	20	25	32	40	50
PN	10	10	10	10	10	10
ACT	SR52	SR52	SR52	SR63	SR63	SR75
H (mm)	201	201	216	227	263	281
L1 (mm)	163	172	200	208	240	246
L2 (mm)	141	141	141	164	164	210
重量 (KG)	1.5	1.6	1.9	2.5	3.3	3.9
¥						

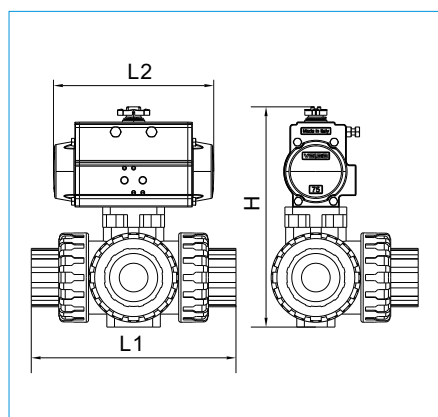



阀体/Body: U-PVC

阀座/Seat: PTFE

连接/Connection: 由令活接/Union socket (GB、ANSI、DIN、JIS)

(可选/Optional: 螺纹/Thread、法兰/Flange)

电压/Voltage: 220VAC、24VDC、380VAC (可选/Optional: 110VAC)

可提供“L”型或“T”型号流向选择/“L” or “T” port

尺寸: 1/2"-2"/Size: 1/2"-2"


Art. 335L(T)E***G - ****

口径

特别代码

开关型/On-off-model

型号 CODE	334L(T)E015G - HABY	334L(T)E020G - HABY	334L(T)E025G - HABY	334L(T)E032G - HBHY	334L(T)E040G - HBHY	334L(T)E050G - HBHY
DN	15	20	25	32	40	50
PN	10	10	10	10	10	10
ACT	AEA-02	AEA-02	AEA-02	AEA-05	AEA-05	AEA-05
H (mm)	217	217	231	247	283	283
L1 (mm)	163	172	200	208	240	246
L2 (mm)	72	72	72	160	160	160
参考重量 (KG)	1.7	1.73	1.85	2.1	2.45	3.1
有源触点 / Active contact						
¥						
无源触点 / Dry contact						
型号 CODE	334L(T)E015G - HABY	334L(T)E020G - HABY	334L(T)E025G - HABY	334L(T)E032G - HBAY	334L(T)E040G - HBAY	334L(T)E050G - HBAY
¥						
24VDC						
型号 CODE	334L(T)E015G - HAGY	334L(T)E020G - HAGY	334L(T)E025G - HAGY	334L(T)E032G - HBGY	334L(T)E040G - HBGY	334L(T)E050G - HBGY
¥						
380VAC						
型号 CODE	334L(T)E015G - HBHY	334L(T)E020G - HBHY	334L(T)E025G - HBHY	334L(T)E032G - HBHY	334L(T)E040G - HBHY	334L(T)E050G - HBHY
ACT	AEA-05H	AEA-05H	AEA-05H	AEA-05H	AEA-05H	AEA-05H
H (mm)	232	232	247	247	283	283
L1 (mm)	163	172	200	208	240	246
L2 (mm)	160	160	160	160	160	160
参考重量 (KG)	2.5	2.53	2.65	2.9	3.25	3.9
¥						

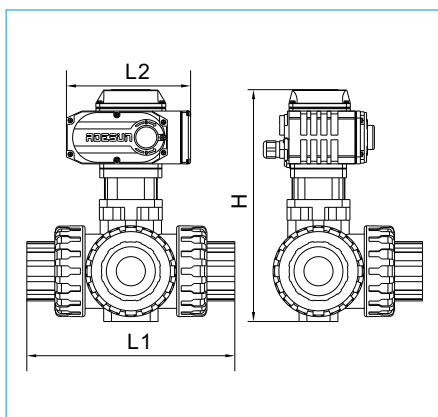

阀体/Body: U-PVC

阀座/Seat: PTFE

连接/Connection: 由令活接/Union socket (GB、ANSI、DIN、JIS)

(可选/Optional: 螺纹/Thread、法兰/Flange)

电压/Voltage: 220VAC (可选/Optional: 110VAC)

可提供“L”型或“T”型号流向选择/“L” or “T” port

带4-20mA输入/输出信号/with 4-20mA input/output signal

(可选/Optional: 1-5VDC输入信号/1-5VDC input signal)

尺寸: 1/2"-2"/Size: 1/2"-2"


Art. 335L(T)M***G - ****

口径

特别代码

调节型/Modulating model

型号 CODE	334L(T)M015G - HBEY	334L(T)M020G - HBEY	334L(T)M025G - HBEY	334L(T)M032G - HBEY	334L(T)M040G - HBEY	334L(T)M050G - HBEY
DN	15	20	25	32	40	50
PN	10	10	10	10	10	10
ACT	AEA-05E	AEA-05E	AEA-05E	AEA-05E	AEA-05E	AEA-05E
H (mm)	232	232	247	247	283	283
L1 (mm)	163	172	200	208	240	246
L2 (mm)	160	160	160	160	160	160
参考重量 (KG)	2.5	2.53	2.65	2.9	3.25	3.9
¥						

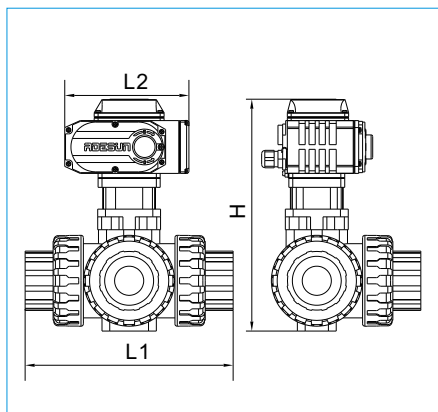



阀体/Body: U-PVC

阀座/Seat: PTFE

连接/Connection: 由令活接/Union socket (GB、ANSI、DIN、JIS)

(可选/Optional: 螺纹/Thread、法兰/Flange)

电压/Voltage: 220VAC、24VDC、380VAC (可选/Optional: 110VAC)

可提供“L”型或“T”型号流向选择/“L” or “T” port

尺寸: 1/2"-2"/Size: 1/2"-2"


Art: 335L(T)E***G — ****

口径

特别代码

开关型/On-off-model

型号 CODE	334L(T)E015G - HBAY-EX	334L(T)E020G - HBAY-EX	334L(T)E025G - HBAY-EX	334L(T)E032G - HBAY-EX	334L(T)E040G - HBAY-EX	334L(T)E050G - HBAY-EX
DN	15	20	25	32	40	50
PN	10	10	10	10	10	10
ACT	AEA-05	AEA-05	AEA-05	AEA-05	AEA-05	AEA-05
H (mm)	253.5	253.5	268.5	268.5	304.5	304.5
L1 (mm)	163	172	200	208	240	246
L2 (mm)	170.5	170.5	170.5	170.5	170.5	170.5
参考重量 (KG)	3.1	3.2	3.3	4	5	6
有源触点 / Active contact						
¥						
无源触点 / Dry contact						
型号 CODE	334L(T)E015G - HBBY-EX	334L(T)E020G - HBBY-EX	334L(T)E025G - HBBY-EX	334L(T)E032G - HBBY-EX	334L(T)E040G - HBBY-EX	334L(T)E050G - HBBY-EX
¥						
24VDC						
型号 CODE	334L(T)E015G - HBGY-EX	334L(T)E020G - HBGY-EX	334L(T)E025G - HBGY-EX	334L(T)E032G - HBGY-EX	334L(T)E040G - HBGY-EX	334L(T)E050G - HBGY-EX
¥						
380VAC						
型号 CODE	334L(T)E015G - HBHY-EX	334L(T)E020G - HBHY-EX	334L(T)E025G - HBHY-EX	334L(T)E032G - HBHY-EX	334L(T)E040G - HBHY-EX	334L(T)E050G - HBHY-EX
ACT	AEA-05H	AEA-05H	AEA-05H	AEA-05H	AEA-05H	AEA-05H
H (mm)	253.5	253.5	268.5	268.5	304.5	304.5
L1 (mm)	163	172	200	208	240	246
L2 (mm)	170.5	170.5	170.5	170.5	170.5	170.5
参考重量 (KG)	3.1	3.2	3.3	4	5	6
¥						

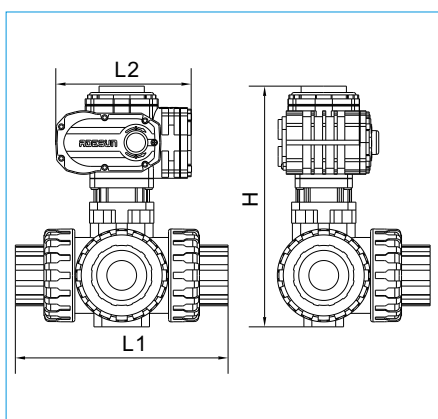

阀体/Body: U-PVC

阀座/Seat: PTFE

连接/Connection: 由令活接/Union socket (GB、ANSI、DIN、JIS)

(可选/Optional: 螺纹/Thread、法兰/Flange)

电压/Voltage: 220VAC (可选/Optional: 110VAC)

可提供“L”型或“T”型号流向选择/“L” or “T” port

带4-20mA输入/输出信号/with 4-20mA input / output signal

(可选/Optional: 1-5VDC输入信号/1-5VDC input signal)

尺寸: 1/2"-2"/Size: 1/2"-2"

Art: 335L(T)M***G — ****

口径

特别代码

调节型/Modulating model

型号 CODE	334L(T)M015G - HBEY-EX	334L(T)M020G - HBEY-EX	334L(T)M025G - HBEY-EX	334L(T)M032G - HBEY-EX	334L(T)M040G - HBEY-EX	334L(T)M050G - HBEY-EX
DN	15	20	25	32	40	50
PN	10	10	10	10	10	10
ACT	AEA-05E	AEA-05E	AEA-05E	AEA-05E	AEA-05E	AEA-05E
H (mm)	253.5	253.5	268.5	268.5	304.5	304.5
L1 (mm)	163	172	200	208	240	246
L2 (mm)	170.5	170.5	170.5	170.5	170.5	170.5
参考重量 (KG)	3.1	3.2	3.3	4	5	6
¥						

