


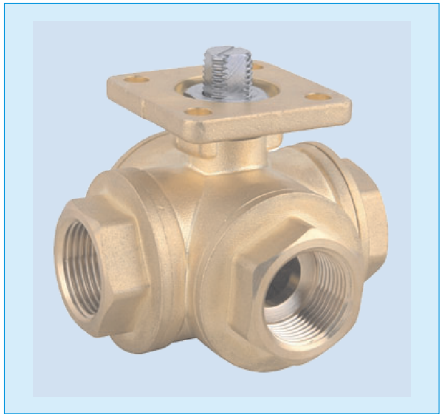

三通, 螺纹端, PN16, 高平台, 缩径球阀
Three ways, F/F threading, PN16, ISO5211 pad direct, reduced bore ball valve

产品特性 SPECIFICATIONS

- ★工作压力: PN16
Working Pressure : PN16
- ★温度范围: -10℃ ~+200℃
Temperature Range:-10℃ ~+200℃
- ★适用介质: 水、油、气及某些腐蚀性液体
Suitable medium: water,oil,air and some corrosive liquid




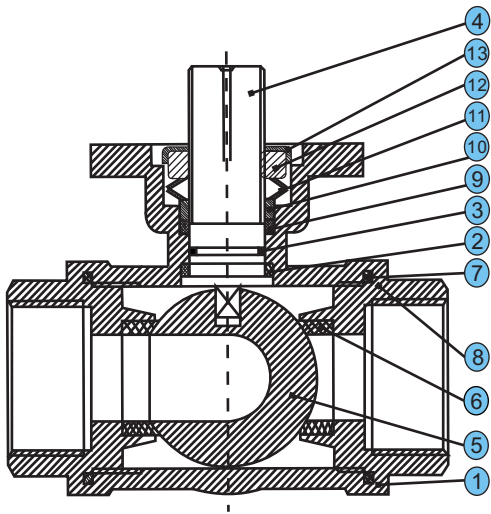


Table with 2 main columns: 序号 NO. and 零件名称 PART NAME. It lists 13 components including the body, bonnet, seal ring, stem, ball, ballsealing, sealing gasket, bonnet, stemseal ring, gasket, v sealing, lock nut, and locating bush.

外形尺寸(单位: mm)

Table with 9 columns: DN, RC, L, L1, SW, H, S, ØK1, and ØK2. It provides dimensional data for valve sizes ranging from 10 to 50 mm.

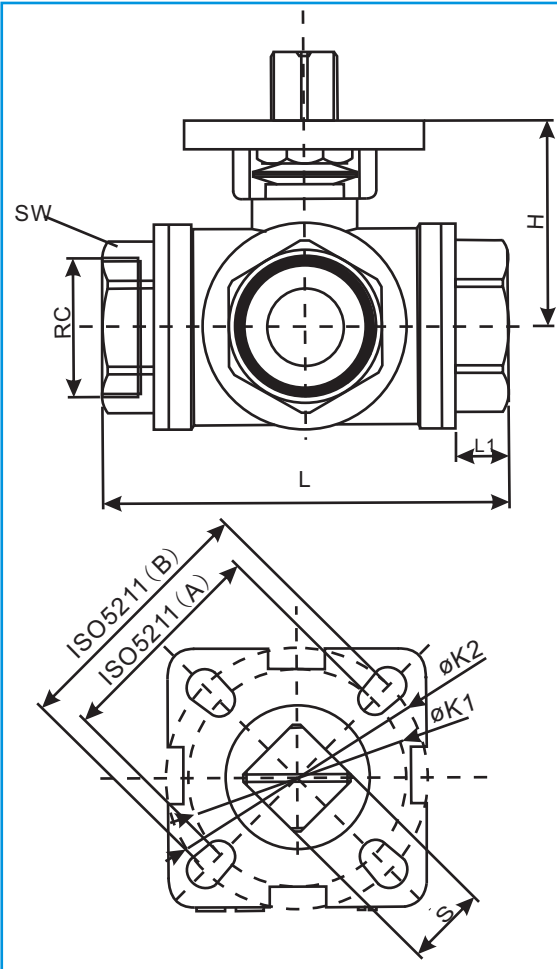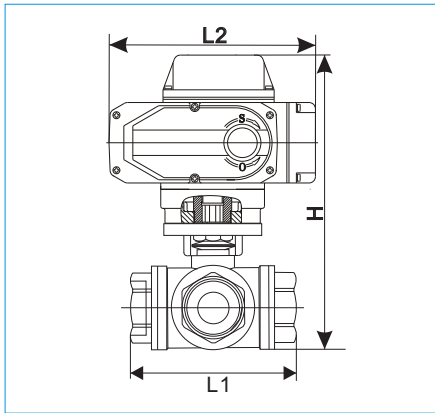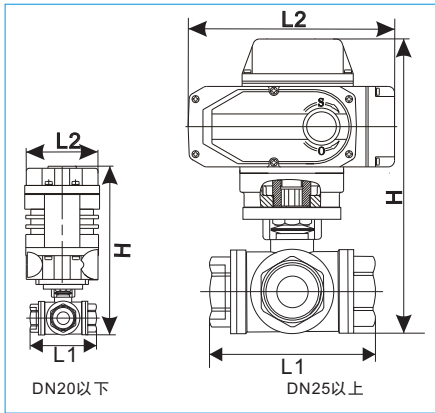

配 **ADESUN** 电动执行器 / with **ADESUN** electrical actuator

Art: 325L(T)E***G - ****

口径

特别代码

开关型 / On-off-model

型号 CODE	325L(T)E010G -HABB	325L(T)E015G -HABB	325L(T)E020G -HABB	325L(T)E025G -HBAB	325L(T)E032G -HBAB	325L(T)E040G -HBAB	325L(T)E050G -HBAB
DN	10	15	20	25	32	40	50
PN	16	16	16	16	16	16	16
ACT	AEA-02	AEA-02	AEA-02	AEA-05	AEA-05	AEA-05	AEA-05
L1mm	75	75	85	100	117	142	156
L2mm	72	72	72	160	160	160	160
Hmm	167	172	182	206	220	234	253
重量(KG)	2	2	2.5	3.9	5	6.3	11

有源触点 / Active contact

无源触点 / Dry contact

型号 CODE	325L(T)E010G -HABB	325L(T)E015G -HABB	325L(T)E020G -HABB	325L(T)E025G -HBAB	325L(T)E032G -HBAB	325L(T)E040G -HBAB	325L(T)E050G -HBAB
------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

24VDC

型号 CODE	325L(T)E010G -HABG	325L(T)E015G -HABG	325L(T)E020G -HABG	325L(T)E025G -HBGB	325L(T)E032G -HBGB	325L(T)E040G -HBGB	325L(T)E050G -HBGB
------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

380VAC

型号 CODE	325L(T)E010G -HBHB	325L(T)E015G -HBHB	325L(T)E020G -HBHB	325L(T)E025G -HBHB	325L(T)E032G -HBHB	325L(T)E040G -HBHB	325L(T)E050G -HBHB
ACT	AEA-05H	AEA-05H	AEA-05H	AEA-05H	AEA-05H	AEA-05H	AEA-05H
L1mm	75	75	85	100	117	142	156
L2mm	160	160	160	160	160	160	160
Hmm	183	188	198	206	220	234	253
重量(KG)	2.4	2.4	2.6	3	3.5	4.5	5

配 **ADESUN** 电动执行器 / with **ADESUN** electrical actuator

Art: 325L(T)M***G - ****

口径

特别代码

调节型 / Modulating model

型号 CODE	325L(T)M010G -HBEB	325L(T)M015G -HBEB	325L(T)M020G -HBEB	325L(T)M025G -HBEB	325L(T)M032G -HBEB	325L(T)M040G -HBEB	325L(T)M050G -HBEB
DN	10	15	20	25	32	40	50
PN	16	16	16	16	16	16	16
ACT	AEA-05E	AEA-05E	AEA-05E	AEA-05E	AEA-05E	AEA-05E	AEA-05E
L1mm	75	75	85	100	117	142	156
L2mm	160	160	160	160	160	160	160
Hmm	183	188	198	206	220	234	253
重量(KG)	2.6	2.8	3	3.9	5	6.3	11