



二片式, 螺纹端, 高平台, 全流量球阀
Two pieces, F/F threading, ISO5211 pad direct, full bore ball valve

产品特性 SPECIFICATIONS

★工作压力: PN16-PN40





Working Pressure :PN16-PN40

★温度范围: -20°C ~+160°C

Temperature Range:-20°C ~+160°C

★适用介质: 水、油、气及某些腐蚀性液体

Suitable medium: water, oil, air and some corrosive liquid

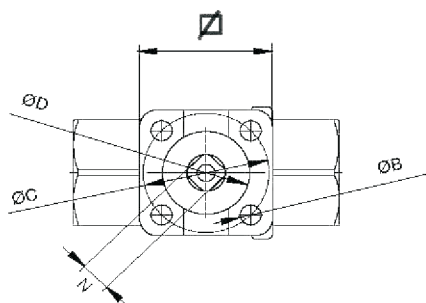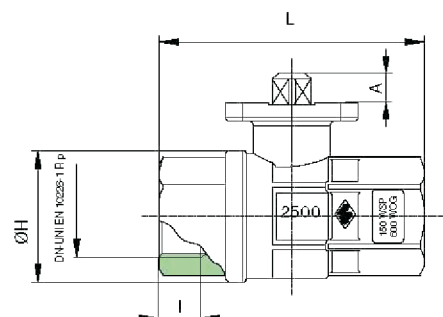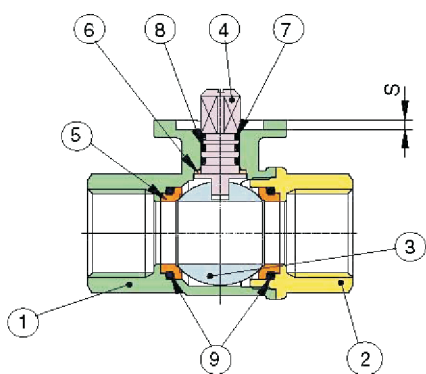

序号 NO.	零件名称 PART NAME	材质 MATERIAL
1	阀体 BODY	Brass
2	阀盖 BONNET	Barss
3	球体 BALL	Brass
4	阀杆 STEM	Brass
5	阀座 SEAT	PTFE
6	中口 STEM PACKING	PTFE
7	阀杆密封圈 STEM SEALING	PTFE
8	O型圈 O-RING	PTFE
9	O型圈 O-RING	PTFE

外形尺寸(单位: mm)

尺寸	RC	L	I	CH	ΦH	ISO 5211					E	F	N	PN
						A	ΦB	ΦC	ΦD	S				
8	1/4"	67	11	27	33.5	9	6	36	25	2	5.5	32.5	9	40
10	3/8"	67	11.4	27	33.5	9	6	36	25	2	5.5	32.5	9	40
15	1/2"	67	15	27	33.5	9	6	36	25	2	5.5	32.5	9	40
20	3/4"	76	16.3	32	40	9	6	36	25	3	5	34.5	9	40
25	1"	90	19.1	41	49	9	6	36	25	3	6	45.5	9	40
32	1-1/4"	102	21.4	50	58.5	9	6	36	25	3	6	49	9	40
40	1-1/2"	114	21.4	55	73	11	7	50	35	3	8	64	11	40
50	2	138	25.7	70	91.5	11	7	50	35	3	8	73.2	11	40
65	2-1/2"	165	30.2	90	114.5	15	9	70	55	3	9	88.5	14	25
80	3"	188	33.3	105	136	15	9	70	55	3	9	98	14	16
100	4"	255	39.3	130	166	17.5	9	70	55	3	8.5	116.5	17	16

Art. 325系列两片式黄铜气动球阀

ADESUN

Art. 325 series two pieces brass pneumatic ball valve



阀体/Body: 黄铜/Brass

阀座/Seat: PTFE

连接/Connection: BSP thread F/F (可选/Optional: NPT、PT)

配 **ADESUN** 气动执行器/with **ADESUN** pneumatic actuator


Art: 325D*G - ******

口径

特别代码

双动/Double acting

型号 CODE	325D010G -CCNB	325D015G -CCNB	325D020G -CCNB	325D025G -CCNB	325D032G -CCNB	325D040G -CENB	325D050G -CENB	325D065G -CGNB	325D080G -CHNB	325D100G -CLNB
DN	10	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	16	16	16
ACT	ACD050	ACD050	ACD050	ACD063	ACD063	ACD075	ACD075	ACD090	ACD100	ACD115
L1mm	55	55	71	82	91	103	212	158	188	222
L2mm	154.5	154.5	154.5	168	168	219	219	249	274	315
Hmm	130	135	143	169	185	220	238	296	334	381
重量(KG)	1.5	1.6	1.7	2.3	2.7	4.3	5	8.3	11.5	18
¥										

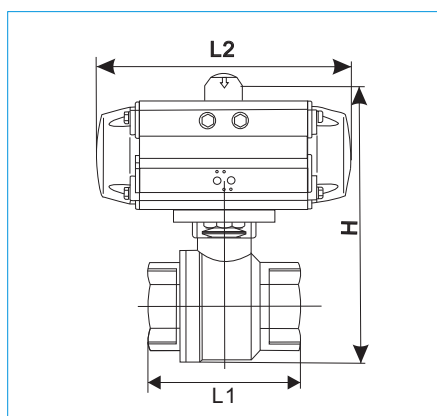

Art: 325S*G - ******

口径

特别代码

单动/Single acting

型号 CODE	325S010G -CCNB	325S015G -CCNB	325S020G -CCNB	325S025G -CCNB	325S032G -CCNB	325S040G -CHNB	325S050G -CHNB	325S065G -CINB	325S080G -CKNB	325S100G -CLNB
DN	10	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	16	16	16
ACT	ACS050	ACS050	ACS063	ACS075	ACS090	ACS100	ACS100	ACS115	ACS145	ACS160
L1mm	55	55	71	82	91	103	212	158	188	222
L2mm	154.5	154.5	168	219	249	274	274	315	417	452
Hmm	130	135	161	191	219	247	266	323	397	452
重量(KG)	1.6	1.6	2.5	2.6	6	8	9	18	26	34
¥										



阀体/Body: 黄铜/Brass

阀座/Seat: PTFE

连接/Connection: BSP thread F/F (可选/Optional: NPT、PT)

配 **VALBIA** 气动执行器/with **VALBIA** pneumatic actuator


Art: 325D*G - ******

口径

特别代码

双动/Double acting

型号 CODE	325D010G -VANB	325D015G -VCNB	325D020G -VCNB	325D025G -VCNB	325D032G -VDNB	325D040G -VENB	325D050G -VENB	325D065G -VFNB	325D080G -VHNB	325D100G -VLNB
DN	10	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	16	16	16
ACT	DA32	DA52	DA52	DA52	DA63	DA75	DA75	DA85	DA100	DA115
L1mm	55	55	71	82	91	103	212	158	188	222
L2mm	110	141	141	141	164	210	210	240.5	275	333
Hmm	114	155	163	172	199	230	248	308	344	379
重量(KG)	0.9	0.9	1.7	1.9	2.8	3.1	4.9	8.2	10	15
¥										

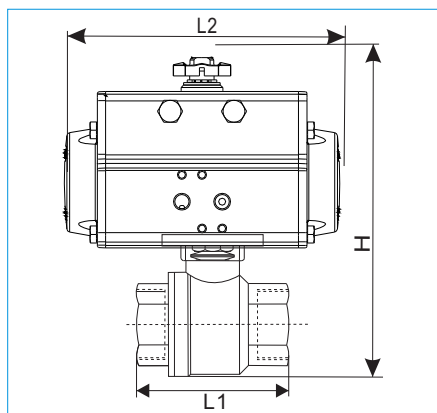

Art: 325S*G - ******

口径

特别代码

单动/Single acting

型号 CODE	325S010G -VCNB	325S015G -VDNB	325S020G -VDNB	325S025G -VENB	325S032G -VFNB	325S040G -VHNB	325S050G -VLNB	325S065G -VJNB	325S080G -VLNB	325S100G -VLNB
DN	10	15	20	25	32	40	50	65	80	100
PN	16	16	16	16	16	16	16	16	16	16
ACT	SR52	SR63	SR63	SR75	SR85	SR100	SR115	SR125	SR160	SR160
L1mm	55	55	71	82	91	103	212	158	188	222
L2mm	141	164	164	210	240.5	275	333	372	500	500
Hmm	150	167	175	201	231	257	311	368	437	472
重量(KG)	1.7	1.7	2.6	2.8	4.5	5.2	9.2	11.5	17.5	25
¥										