

1x8 HDMI Splitter

HSP0108A20


This 1x8 HDMI splitter distributes one Ultra HD A/V source to eight Ultra HD displays simultaneously without loss of quality. Compliant with HDCP 1.3, support resolution up to 4K*2K@30Hz. With smart EDID management, let the source device sends suitable A/V contents to the variable displays. Support pass through LPCM 7.1, Dolby®TrueHD, Dolby Digital® Plus, and DTS-HD® Master Audio™.

Application:

The HDMI splitter(HSP0108A20) is apply to TV stores, exhibition hall, bars, KTV clubs, schools, hospitals, hotel lobbies, retail establishments and any other installations where Ultra HD AV content from an HDMI source needs to be displayed simultaneously on up to eight Ultra HD displays.

Features:


- Distributes one Ultra HD A/V source to 8 Ultra HD displays.
- Support the resolution up to Ultra HD 4K 30Hz.
- Support up to 36 bit/pixel Deep Color.
- Supports LPCM 7.1, Dolby® TrueHD, Dolby Digital® Plus, and DTS-HD® Master Audio™.
- Support EDID mode adjust, compatible with most of the HDMI source and displays.

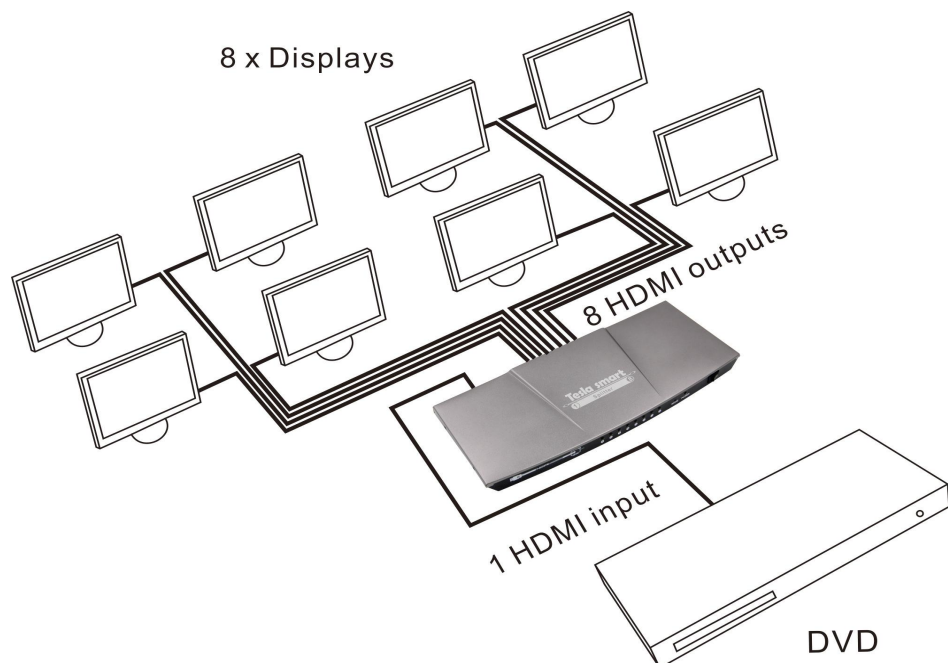

Packing List:


- 1 * HDMI Splitter 1x8
- 1 * DC 5V 2A Power Adapter
- 1 * Quick-Start Guide

Panel Description:

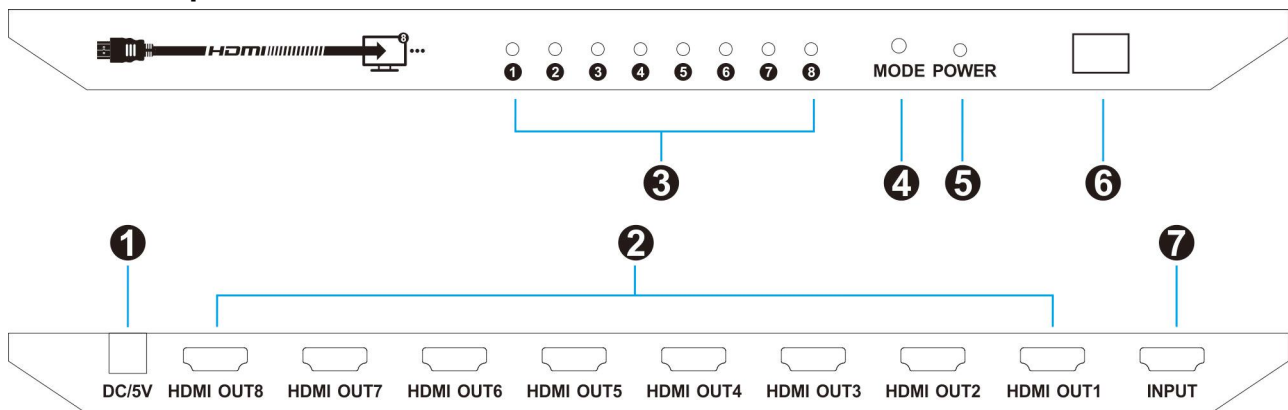

- | | |
|----------------------|----------------|
| ① DC 5V | ⑤ Power status |
| ② HDMI output | ⑥ Power switch |
| ③ HDMI output status | ⑦ HDMI input |
| ④ EDID mode adjust | |

Connection Diagram:

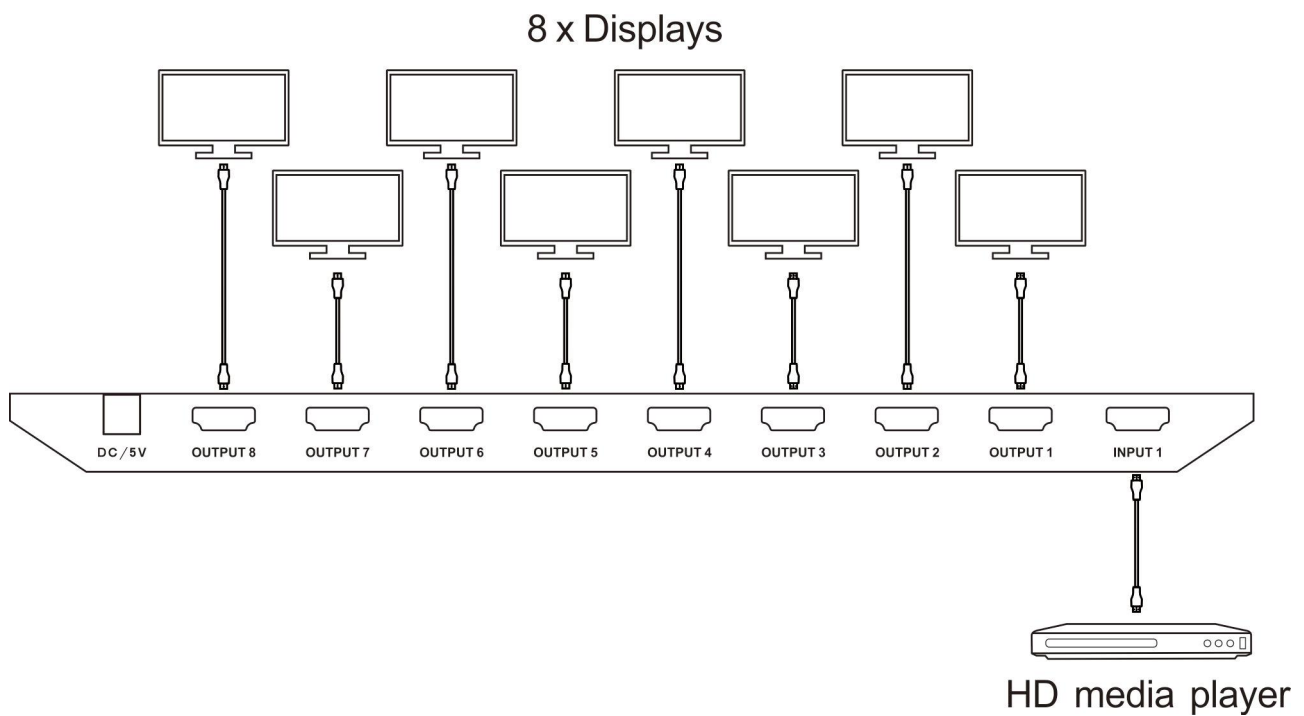

Specification:

HSP0108A20	1x8 HDMI Splitter
Functionality:	
Smart EDID	Yes
Technical:	
Resolution	Up to 3840*2160@30Hz
HDCP version	1.3
Data rate	10.2 Gbps
Input	1* HDMI Type A, 24/26 AWG cable up to 5M (1080P60Hz)
Output	8* HDMI Type A, 24/26 AWG cable up to 15M (1080P60Hz)
ESD protection	Human body model - $\pm 8\text{kV}$ (Air-gap discharge)
Mechanical	
Chasing material	Aluminum Alloy
Product Dimensions	300 (L) x 117 (W) x 28 (H) mm
Item Weight	800g