


5通气控阀 5-Port Air Operated Valve Series **KVZA3000**



KVZA3120

规格 Specifications

型号 Model	KVZA3120	KVZA3220	KVZA3320	KVZA3420	KVZA3520
使用流体 Fluid	过滤压缩空气 Filtered compressed air				
接管口径 Port size	M5				
气控孔口径 Pilot port size	M5				
使用压力范围 Operating pressure range (MPa)	0.15~1.0		0.2~1.0		
有效截面积 Effective sectional area (mm²)	3.6		3.0		
环境及流体温度 Ambient and fluid temperature	5~60℃				
* 润滑 Lubrication	不需要 Not required				

* 如需润滑请使用透平 1 号油 ISO VG32#. Please use 1st Grade Turbine Oil ISO VG32# if necessary.

型号表示方法 How to Order

KVZA 3 **1** 20 - M5

结构 Configuration


1	单气控 Single
2	双气控 Double
3	3 位 / 中央封闭 3-position/ closed center
4	3 位 / 中央排气 3-position/ exhaust center
5	3 位 / 中央加压 3-position/ pressure center

接管口径
Port size


M5 M5x0.8

外形尺寸图 Dimensions (mm)

KVZA3120

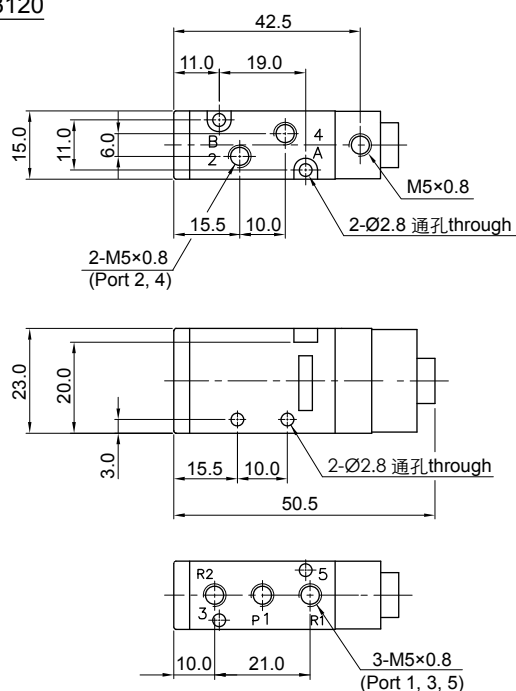

KVZA3220



KVZA33(4, 5)20

