

M10 MONO MODULE **N** TYPE

550W-560W

Premium Quality *Bifacial Transparent Backsheet*

144 CELL

M10 MONO N-TYPE

21.68%

MAXIMUM EFFICIENCY

0 to +5W

POSITIVE POWER TOLERANCE



Higher Output of Power




For Environment For Future



Optimize the Temperature Coefficient



Reduce Equipment & Material Cost

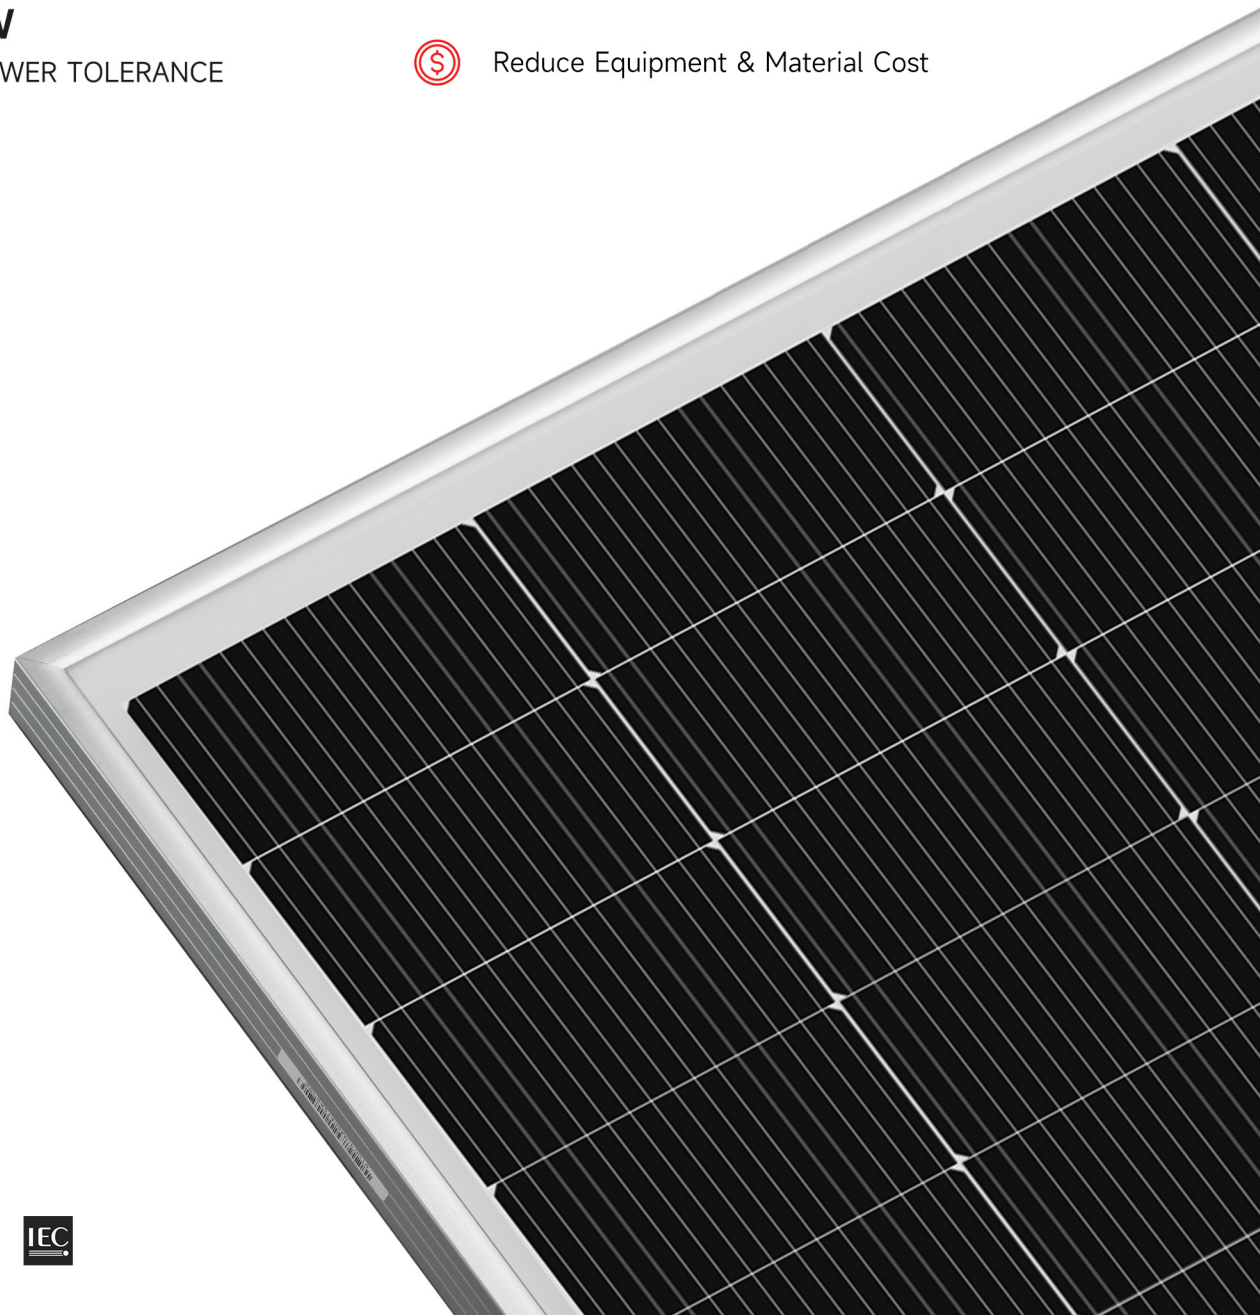


Module Type		PW-72M550HM10		PW-72M555HM10		PW-72M560HM10	
		STC	NOCT	STC	NOCT	STC	NOCT
Test Environment		STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power	$P_{MAX}(W)$	550	409.33	555	413.03	560	416.77
Maximum Power Voltage	$V_{MPP}(V)$	40.99	38.14	41.12	38.26	41.25	38.38
Maximum Power Current	$I_{MPP}(A)$	13.42	10.73	13.5	10.79	13.58	10.85
Open Circuit Voltage	$V_{oc}(V)$	49.65	46.87	49.8	47.01	49.95	47.15
Short Circuit Current	$I_{sc}(A)$	14.13	11.41	14.22	11.48	14.31	11.55
Tolerance	(W)	0 - +5		0 - +5		0 - +5	
Module Efficiency	(%)	21.29		21.48		21.68	

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3. Average efficiency reduction of 4.5% at 200W/m² according to EN 60904-1
 NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

BIFACIAL OUTPUT-REAR SIDE POWER GAIN 10% FOR REFERENCE


Module Type	PW-72M550HM10	PW-72M555HM10	PW-72M560HM10
Pmax (W)	605	610.5	616
Voc (V)	49.50	49.80	49.95
Isc (A)	15.59	15.68	15.77
Vmp (V)	40.99	41.12	41.25
Imp (A)	14.76	14.85	14.93

DIMENSIONS OF PV MODULE

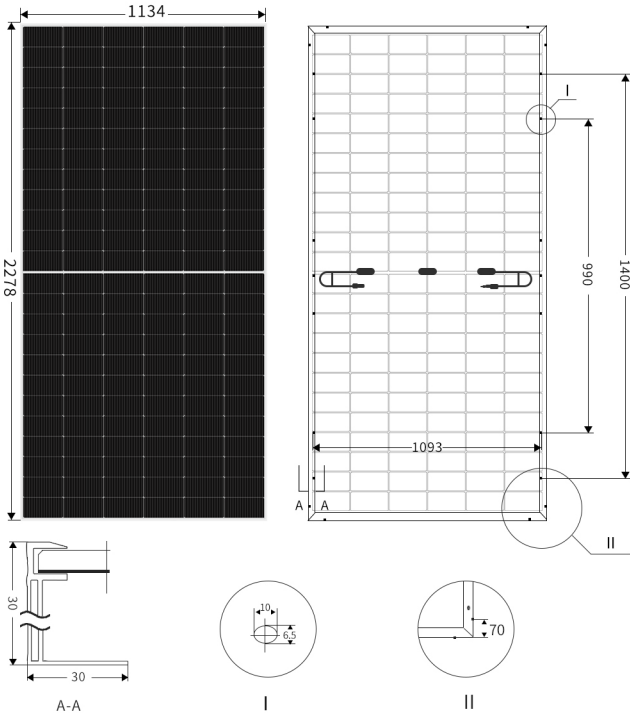


LINEAR PERFORMANCE WARRANTY


15 Year Product Warranty 30 Year Linear Power Warranty

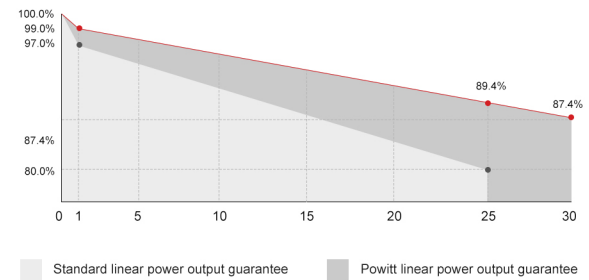

I-V CURVE (555W)



P-V CURVE (555W)



MECHANICAL DATA

Cell Type	Mono N-TYPE
No. of Cells	144 (6 x 24)
Module Dimensions	2278 x 1134 x 30mm
Weight	27kg
Glass	Anti-Reflective, AR Coated and Heat Tempered Solar Glass-3.2mm
Backsheet	Transparent
Frame	Anodized Aluminium Alloy
Junction Box	IP 68 Rated
Cables	4.0mm ² , 350mm or Customized Length
Connector	MC4 Compatible

TEMPERATURE RATINGS

Nominal Operating Cell Temperature(NOCT)	45±2°C
Temperature Coefficient of P_{MAX}	-0.30%/°C
Temperature Coefficient of V_{oc}	-0.25%/°C
Temperature Coefficient of I_{sc}	+0.046%/°C

MAXIMUM RATINGS

Operational Temperature	-40 to +85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	25A
Mechanical Load	5400pa
Wind Load	2400pa

PACKAGING CONFIGURATION 37 pcs/Pallet, 740 pcs/40'HQ

All rights reserved. Specifications included in this datasheet are subject to change without notice.

Version No. PWS202311V03



Powitt Solar Co.,Ltd
 www.powitt.com
 info@powitt.com
 +86 519 8899 2132

FUTURE POWER AT TODAY