



JN25F.2.N 系列 - 封闭内侧可打开


Series of JN25F.2.N-Enclosed type interior opening

JFLO®



◎ 适用于直径 22 毫米以下线缆 Suitable for 22mm or less of cable.

主要技术参数 Basic technical data

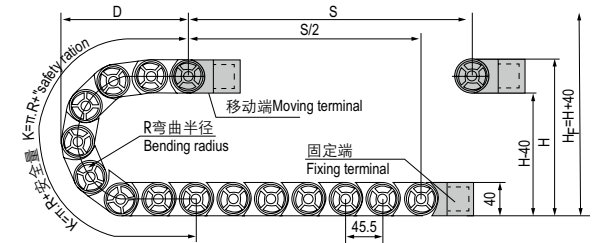

节距 =46mm, 每米节数 =22, 链长 =S/2+K, S=行程距离, K=π.R+"安全量"
Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"

R	55	63	75	100	125
H	150	166	190	240	290
D	121	129	141	166	191
K	276	322	368	414	506

安装实际高度: $H_f = H + 40\text{mm}$ (负载 2kg/m)

Actual mounting height: $H_f = H + 40\text{mm}$ (load 2kg/m)




拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
JN25F.2.57N	25	57	40	77	F,N	55,63,75, 100,125	X ₆₋₁		6.5*10	24	45	60		9.5	77	JN25F.2.57W-XJT
								F-F	6	16	69	61.5	16	10	81	JN25F.2.57N-FJT

注: N 表示内侧打开 Note: N indicates that the interior opening

单位 (unit): mm

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

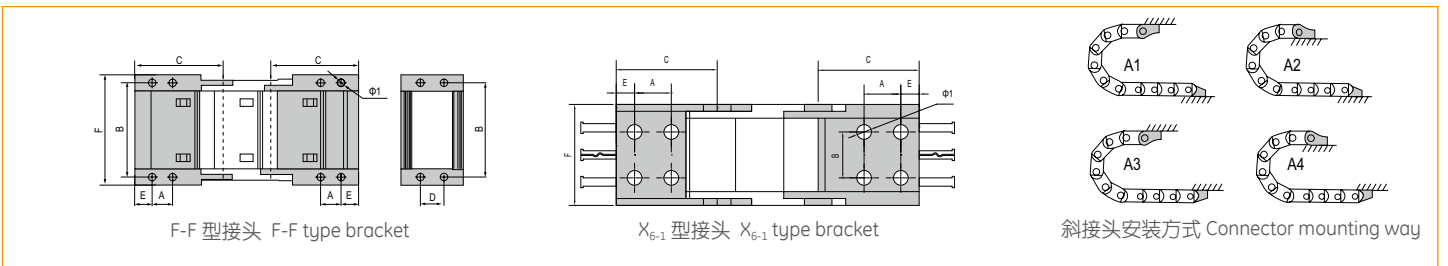

* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092

订货示例 Order Example

示例 拖链内高 25mm、内宽 57mm、半径 55mm、长度 1 米 /22 节 (Sample: inner height 25mm, inner width 57mm, radius 55mm, length 22 links/1 meter)

拖链 Chain JN25F.2.57N R55 1000mm /22 Links (实际长度 Physical length: $\pm 2\text{mm}$)

接头 Bracket JN25F.2.57N-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 /1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)