

MATERIAL

Insulator : Thermoplastic High Temp UL94-V0
Contact Pin : Phosphor Bronze





SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : AC 500V for one minute

623-x 2- xx x x xx
1 2 3 4 5 6

1. 7: Green Product
- 9: Green Product High Temp
2. 1: Single row
- 2: Dual rows
3. No. of contacts
4. G: Gold flash
- T: Tin plated
5. B: Black Insulator
6. Pinrex internal code.

POLES	DIM A	DIM B	POLES	DIM A	DIM B	POLES	DIM A	DIM B
			16	32.00	30.00	31	62.00	60.00
2	4.00	2.00	17	34.00	32.00	32	64.00	62.00
3	6.00	4.00	18	36.00	34.00	33	66.00	64.00
4	8.00	6.00	19	38.00	36.00	34	68.00	66.00
5	10.00	8.00	20	40.00	38.00	35	70.00	68.00
6	12.00	10.00	21	42.00	40.00	36	72.00	70.00
7	14.00	12.00	22	44.00	42.00	37	74.00	72.00
8	16.00	14.00	23	46.00	44.00	38	76.00	74.00
9	18.00	16.00	24	48.00	46.00	39	78.00	76.00
10	20.00	18.00	25	50.00	48.00	40	80.00	78.00
11	22.00	20.00	26	52.00	50.00			
12	24.00	22.00	27	54.00	52.00			
13	26.00	24.00	28	56.00	54.00			
14	28.00	26.00	29	58.00	56.00			
15	30.00	28.00	30	60.00	58.00			

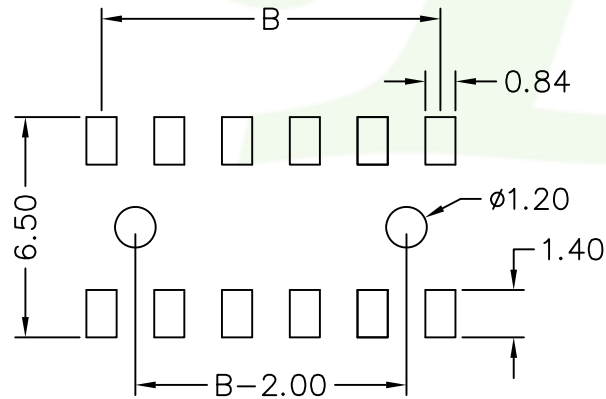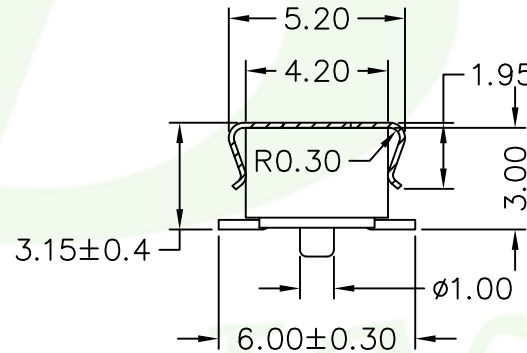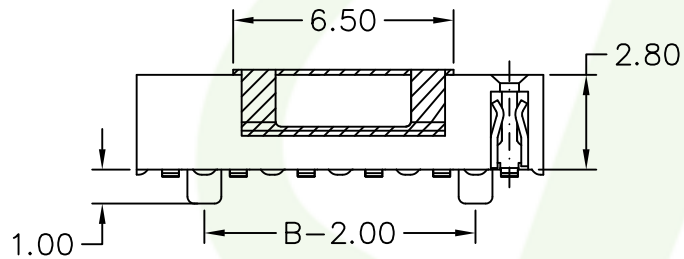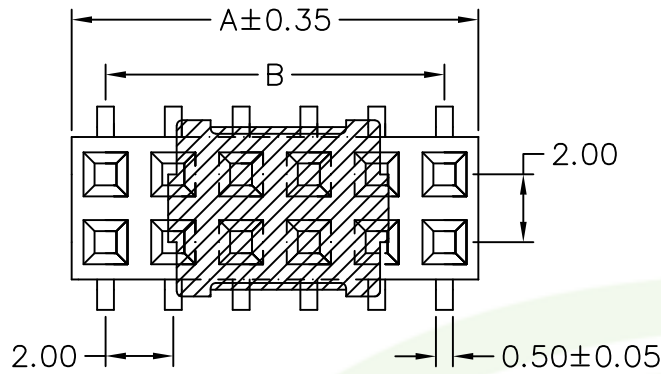

Recommended P.C.B Layout

文管中心
2020.11.06
發行章

		TOLERANCE		OLD PART NO.		TITLE		P 頻銳科技股份有限公司	
		.0 =±.30		DRAWER 姜文慧		FEMALE HEADER 2.0*2.0mm		PINREX TECHNOLOGY CORP.	
		.00 =±.20		CHECK 李劍		SMT TYPE, TOP ENTRY		DRAW NO.	
		.000 =±.XXX		APP'D 李劍		HEIGHT 2.8mm CAP+T/R		623-x2-xxxxxx(網頁專用圖)	
A RELEASE		2020/11/05		SHEET 1 OF 1		NEW PART NO.		623-x2-xxxxxx	
REV. DESCRIPTION		DATE		SCALE NONE SIZE A4		REV. A			
		ANG.=±3'							