




■ Detail Dimensions












0.1"x0.1"




0.1"x0.3"




0.1"x0.6"

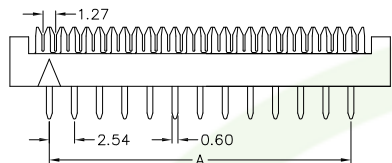


■ Recommended P.C.B Layout



0.1"x0.1"



0.1"x0.3"



0.1"x0.6"

■ MATERIAL

Insulator : PBT

Contact Pin : Brass

■ SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 100MΩMin

Contact Resistance : 1ΩMax

Standard Parts

978-11-1xxxxx

978-11-3xxxxx

978-11-6xxxxx




■ Number Of Contacts

Unit: mm

Poles	DIM A	DIM B	Poles	DIM A	DIM B	Poles	DIM A	DIM B	Poles	DIM A	DIM B
106	5.08	13.07	124	27.94	35.93	164	78.74	86.73	328	33.02	40.82
108	7.62	15.61	126	30.48	38.47	308	7.62	15.42	624	27.94	35.74
110	10.16	18.15	130	35.56	43.55	310	10.16	17.96	628	33.02	40.82
112	12.70	20.69	134	40.64	48.63	314	15.24	23.04	640	48.26	56.06
114	15.24	23.23	140	48.26	56.25	316	17.78	25.58			
116	17.78	25.77	150	60.96	68.95	320	22.86	30.66			
120	22.86	30.85	160	73.66	81.65	324	27.94	35.74			

A	RELEASE	2020/12/08	
REV.	DESCRIPTION	DATE	

TOLERANCE  
 .0 =±.30  
 .00 =±.20  
 .000 =±.XXX  
 .0000=±.  
 ANG.=±3'



OLD PART NO.		TITLE	
DRAWER	CHECK	DIP PLUG 2.54mm	
SHEET	REV.	APP'D	NEW PART NO.
1 OF 1	A	李劍	978-11-xxxxxx

DRAWER		CHECK	
		DIP PLUG 2.54mm	
SHEET	REV.	APP'D	NEW PART NO.
1 OF 1	A	李劍	978-11-xxxxxx

頻銳科技股份有限公司  
 PINREX TECHNOLOGY CORP.  
 DRAW NO. 978-11-xxxxxx(網頁專用圖)