

1x2 HDMI Splitter 4K@60Hz 4:4:4

#HSP0102A1U

This 1x2 HDMI splitter distributes one Ultra HD A/V source to two Ultra HD displays simultaneously without loss of quality. Compliant with HDCP 2.2, support resolution up to 4K@60Hz 4:4:4. With smart EDID management, let the source device sends suitable A/V contents to the variable displays. Support pass through LPCM 7.1, Dolby®TrueHD, Dolby Digital® Plus, and DTS-HD® Master Audio™.


Features:

- Distributes one Ultra HD A/V source to 2 Ultra HD displays
- HDCP 2.2 compliant
- Support resolution up to Ultra HD 4K@60Hz 4:4:4
- Available to display 1080P@60Hz and 3840*2160@60Hz 4:4:4 for different resolution monitors at the same time
- Support up to 36 bit/pixel Deep Color
- Support LPCM 7.1, Dolby® TrueHD, Dolby Digital® Plus, and DTS-HD® Master Audio™
- Support smart EDID management, compatible with most of the HDMI source and displays
- Support HDR 10 and Dolby Vision

Packing List:


- 1 * HDMI Splitter 1x2
- 1 * DC 5V Power Adapter
- 1 * User manual

Panel Description:

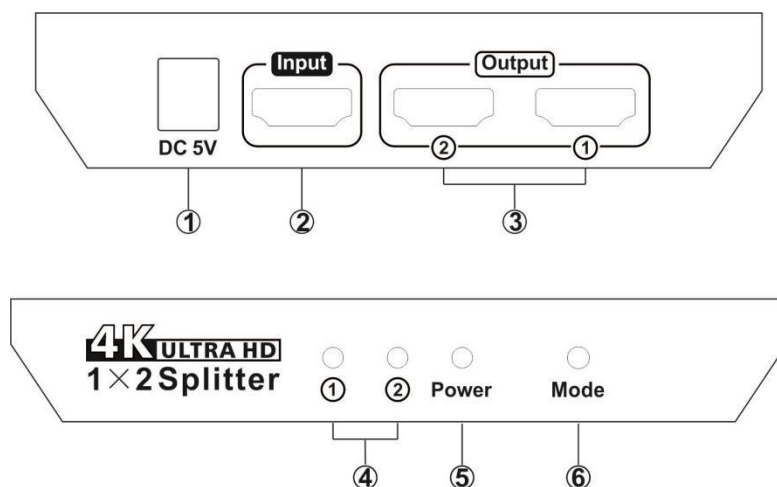

ID	Name	Description
1	DC 5V	DC 5V power supply
2	HDMI input	Connect to HDMI source
3	HDMI output	Connect to HD display
4	HDMI output status	LEDs will be lit if the output connect to displays
5	Power status	Indicate if power supply is available
6	EDID mode adjust	1) Only LED 1 is blinking: Low resolution display is priority 2) Only LED 2 is blinking: Compliant with 4K and 1080P displays 3) LED 1 and LED 2 are blinking: Output 1 is priority

Connection Diagram

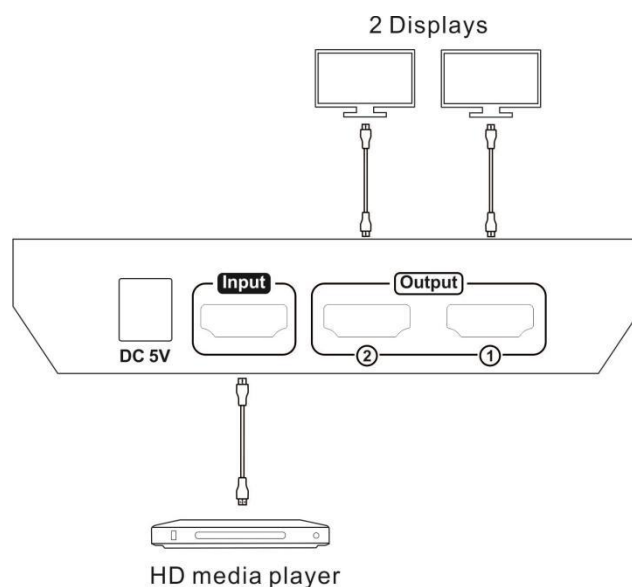

Specification:

HSP0102A1U	1x2 HDMI Splitter 4K@60Hz
Functionality:	
Smart EDID	Yes
Technical:	
Resolution	Up to 3840*2160@60Hz 4:4:4
HDCP version	2.2
Data rate	18 Gbps
Input	1 * HDMI Type A
Output	2 * HDMI Type A
ESD protection	Human body model - ± 8 KV (Air-gap discharge)
Mechanical	
Chasing material	Aluminum Alloy
Product dimensions	122(L) x 54 (W) x 24 (H) mm
Item weight	200g
Power supply	DC 5V
Operating/storage temperature	0 to 70 degree/-40 to 85 degree
Operating humidity	10 to 90% RH