


## 滑台气缸(循环直线导轨) Air Slide Table (Recirculating Linear Guide) Series **KMXQ (Ø6~Ø25)**



### 规格 Specifications


缸径 Bore size (mm)	6	8	12	16	20	25
接管口径 Port size Rc(PT)	M5x0.8				1/8	
使用流体 Fluid	过滤压缩空气 Filtered compressed air					
动作形式 Action	双动 Double acting					
使用压力范围 Operating pressure range (MPa)	0.15~0.7					
环境及流体温度 Ambient and fluid temperature	-5~60°C (未冻结 No freezing)					
活塞速度 Piston speed	50~500 mm/s					
缓冲 Cushion	橡胶缓冲 (标准) Rubber bumper (Standard) 油压缓冲器 (可选) Shock absorber (Option)					
* 润滑 Lubrication	不需要 Not required					

\* 如需要润滑请使用透平 1 号油 ISOVG32。Please use Turbine oil 1st Grade ISOVG32 if necessary.

### 行程 / 磁性开关 Stroke/ Auto switch

缸径 Bore size (mm)	标准行程 Standard stroke (mm)	磁性开关 / 轨道安装 Auto switch/ rail mounting
6	10, 20, 30, 40, 50	D-Z80K
8	10, 20, 30, 40, 50, 75	
12	10, 20, 30, 40, 50, 75, 100	
16	10, 20, 30, 40, 50, 75, 100, 125	
20, 25	10, 20, 30, 40, 50, 75, 100, 125, 150	

### 型号表示方法 How to Order

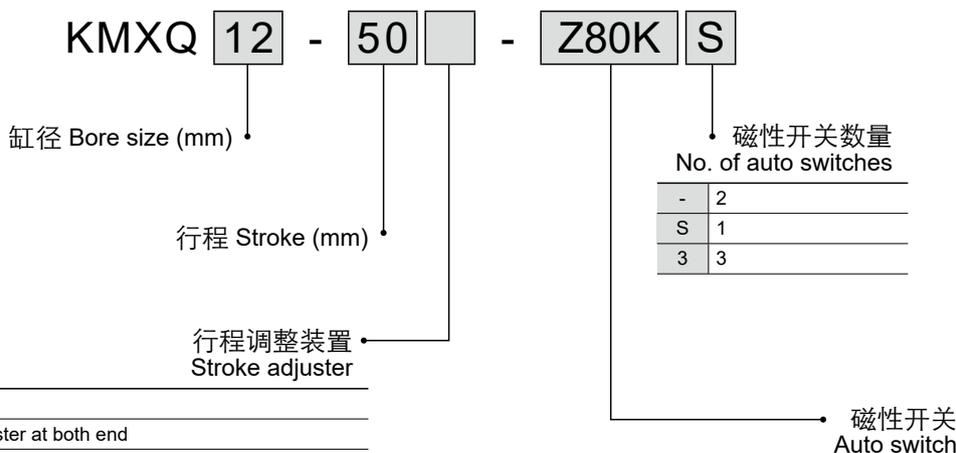

-	无 None
A	两端调程 Adjuster at both end
AS	前端调程 Adjuster at extension end
AT	后端调程 Adjuster at retraction end
*B	两端油压缓冲器 Shock absorber at both end
*BS	前端油压缓冲器 Shock absorber at extension end
*BT	后端油压缓冲器 Shock absorber at retraction end


Z80K	D-Z80K	有接点型 Reed switch
Z80KD	D-Z80KD	两线式无接点 2-wire, solid state
Z80KN	D-Z80KN	NPN 无接点 NPN Solid state output
Z80KP	D-Z80KP	PNP 无接点 PNP Solid state output

\*KMXQ6 无油压缓冲。Shock absorber is not available for KMXQ6.

# 滑台气缸(循环直线导轨) Air Slide Table (Recirculating Linear Guide) Series **KMXQ**

外形尺寸图 Dimensions (mm)

KMXQ6

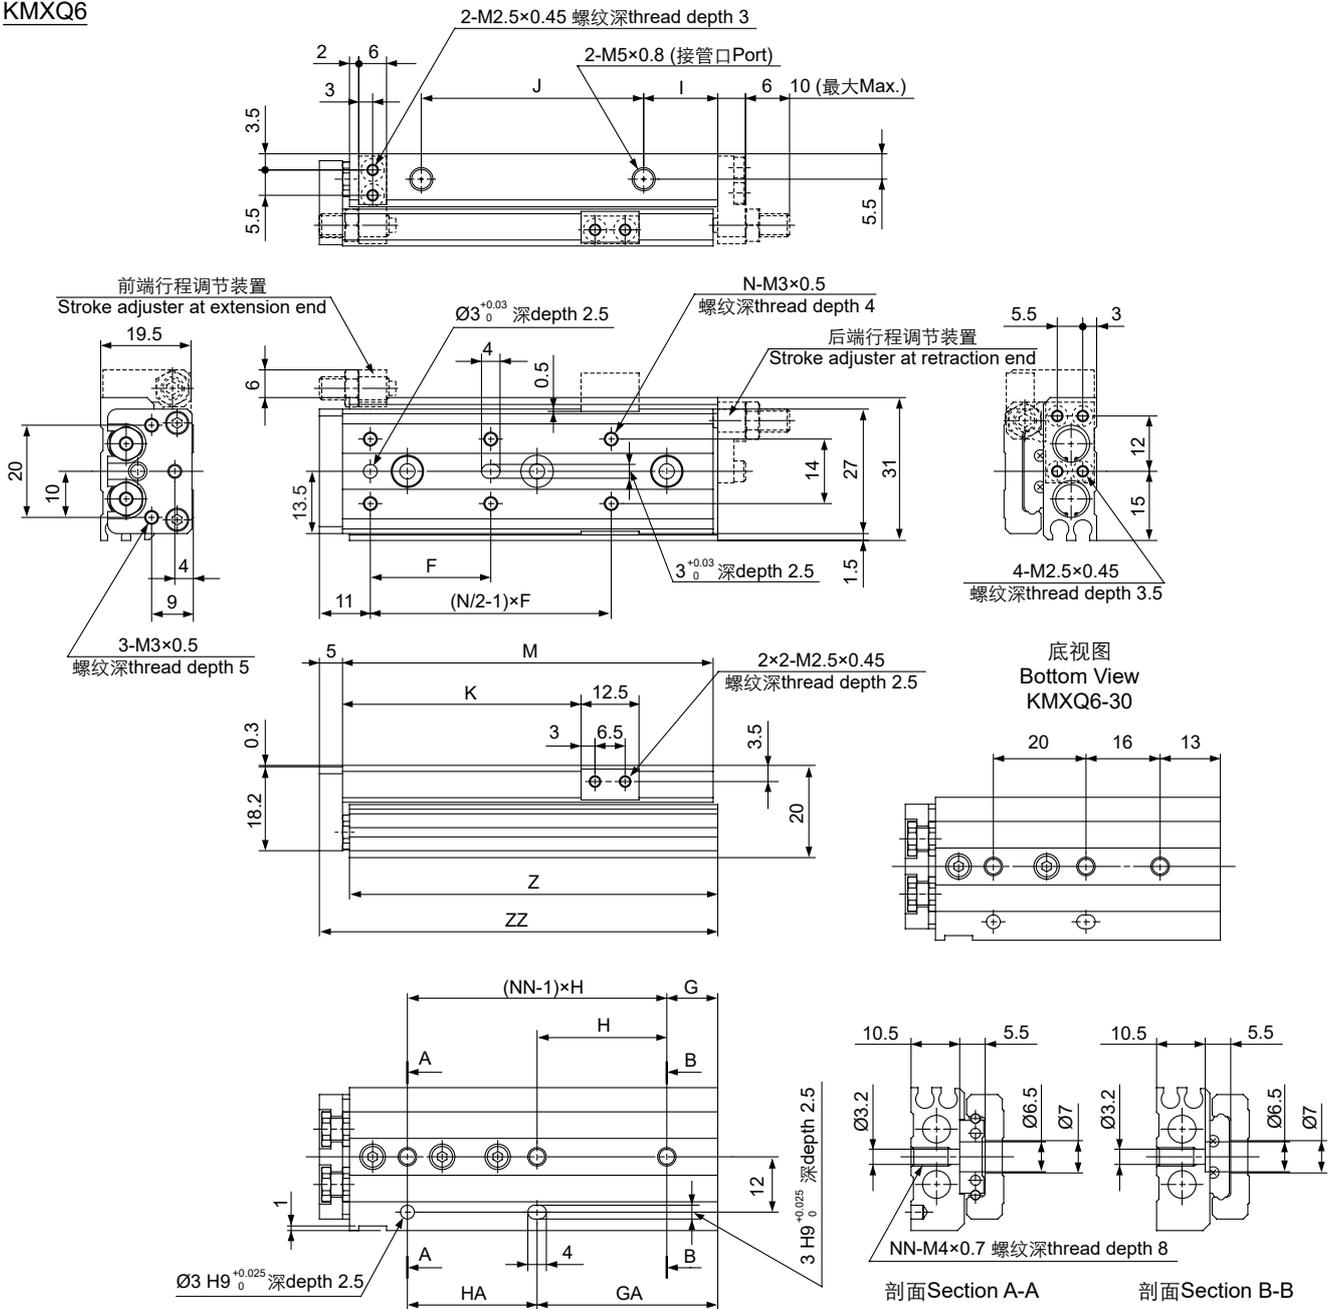


型号 Model	F	G	GA	H	HA	I	J	K	M	N	NN	Z	ZZ
KMXQ6-10	22	6	13	23	16	9	17	21.5	42	4	2	41.5	48
KMXQ6-20	25	13	13	26	26	9	27	31.5	52	4	2	51.5	58
KMXQ6-30	21	-	29	-	20	9	37	41.5	62	6	3	61.5	68
KMXQ6-40	26	11	39	28	28	16	48	51.5	80	6	3	79.5	86
KMXQ6-50	27	21	49	28	28	9	65	61.5	90	6	3	89.5	96

# 滑台气缸(循环直线导轨) Air Slide Table (Recirculating Linear Guide) Series **KMXQ**

外形尺寸图 Dimensions (mm)

KMXQ8

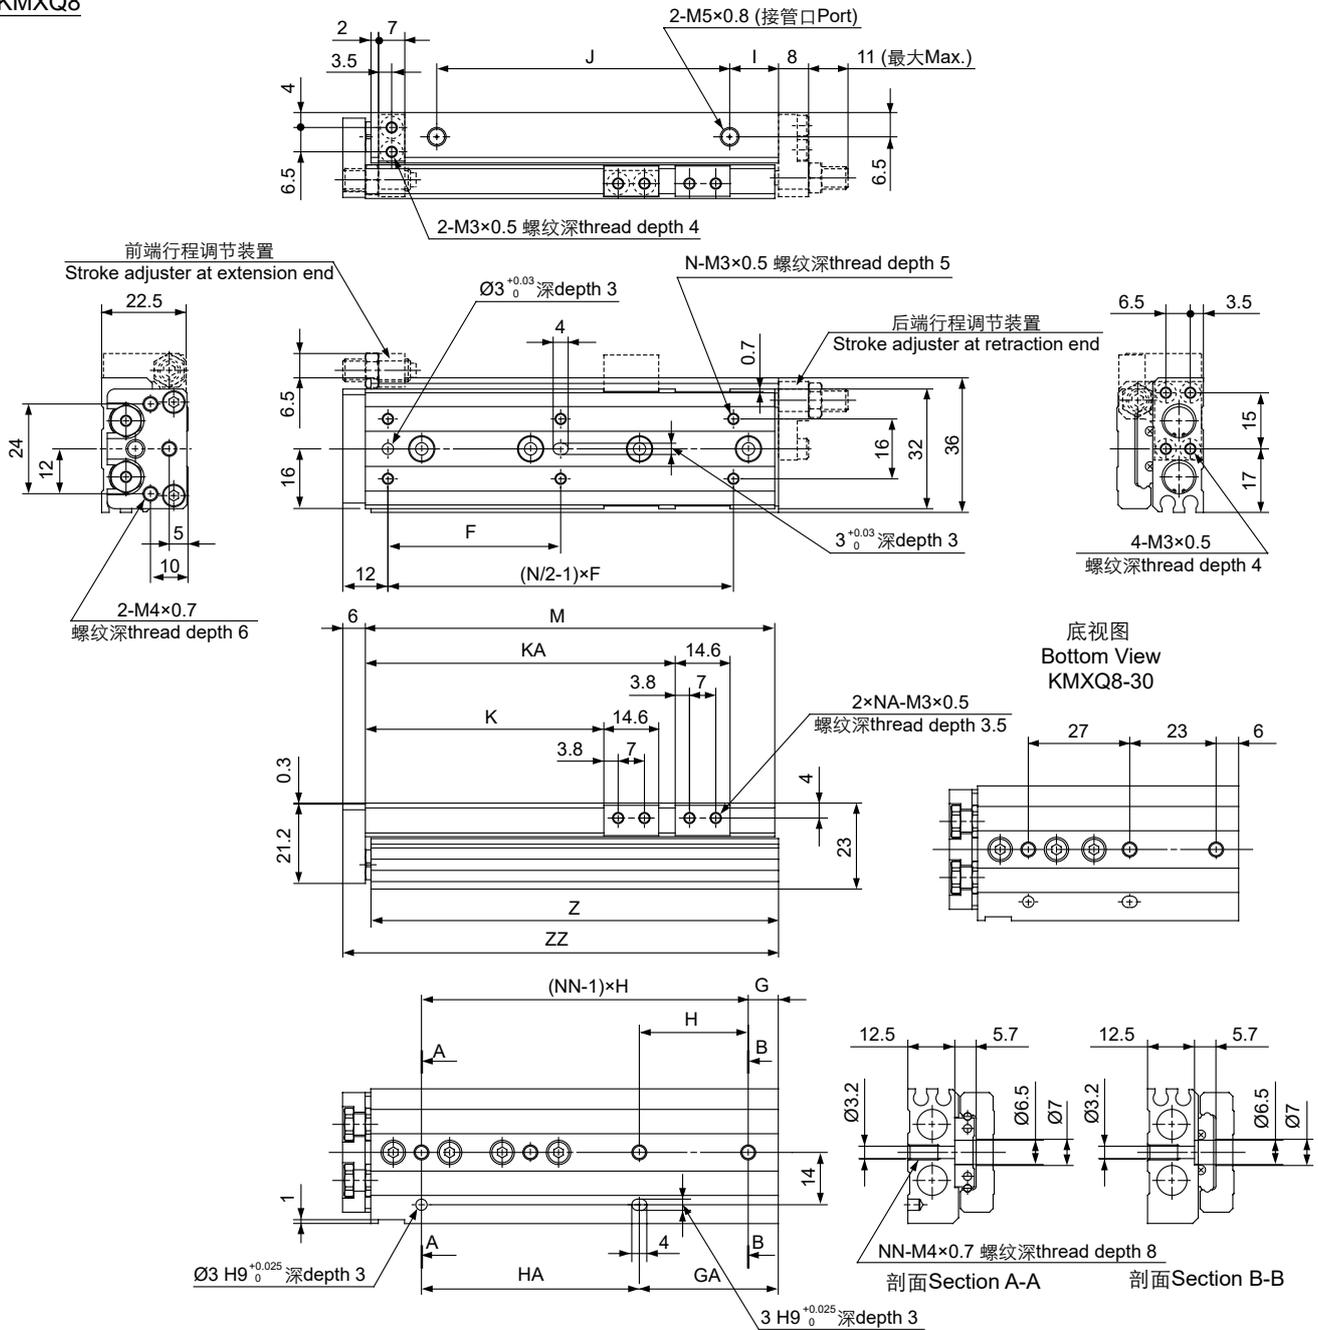


型号 Model	F	G	GA	H	HA	I	J	K	KA	M	N	NA	NN	Z	ZZ
KMXQ8-10	25	7	13	25	19	11	17	23.5	-	46	4	2	2	45.5	53
KMXQ8-20	25	14	14	28	28	10	28	33.5	-	56	4	2	2	55.5	63
KMXQ8-30	26	-	29	-	27	12	40	43.5	-	70	6	2	3	69.5	77
KMXQ8-40	32	8	39	31	31	14	52	53.5	-	84	6	2	3	83.5	91
KMXQ8-50	46	8	37	29	58	13	78	63.5	82.5	109	6	4	4	108.5	116
KMXQ8-75	50	31	61	30	60	12	105	88.5	112.5	135	6	4	4	134.5	142

# 滑台气缸(循环直线导轨) Air Slide Table (Recirculating Linear Guide) Series KMXQ

外形尺寸图 Dimensions (mm)

KMXQ12

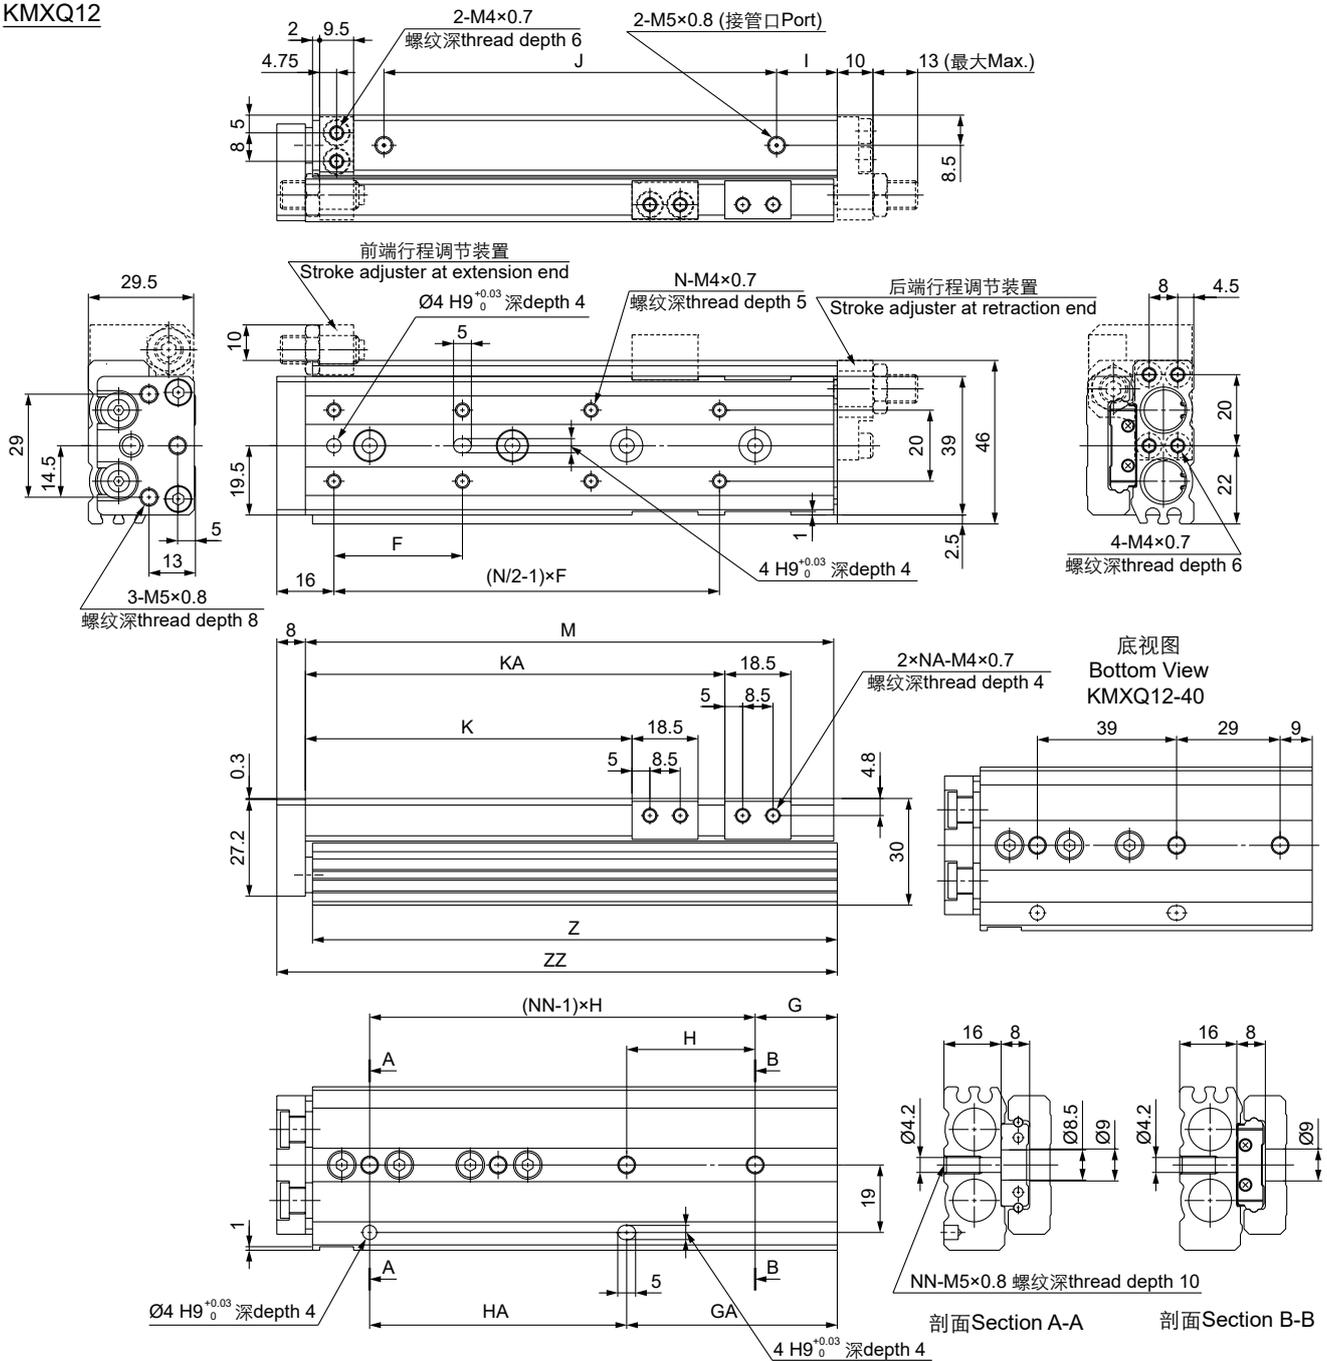


型号 Model	F	G	GA	H	HA	I	J	K	KA	M	N	NA	NN	Z	ZZ
KMXQ12-10	28	18	18	32	32	12	34	26.5	-	67	4	2	2	66	76
KMXQ12-20	28	18	18	32	32	12	34	36.5	-	67	4	2	2	66	76
KMXQ12-30	38	20	20	40	40	14	42	46.5	-	77	4	2	2	76	86
KMXQ12-40	34	-	38	-	39	15	58	56.5	-	94	6	2	3	93	103
KMXQ12-50	34	9	48	39	39	13	70	66.5	-	104	6	2	3	103	113
KMXQ12-75	36	23	59	36	72	17	110	91.5	117.5	148	8	4	4	147	157
KMXQ12-100	36	12	84	36	72	17	135	116.5	142.5	173	10	4	5	172	182



# 滑台气缸(循环直线导轨) Air Slide Table (Recirculating Linear Guide) Series **KMXQ**

外形尺寸图 Dimensions (mm)

KMXQ20

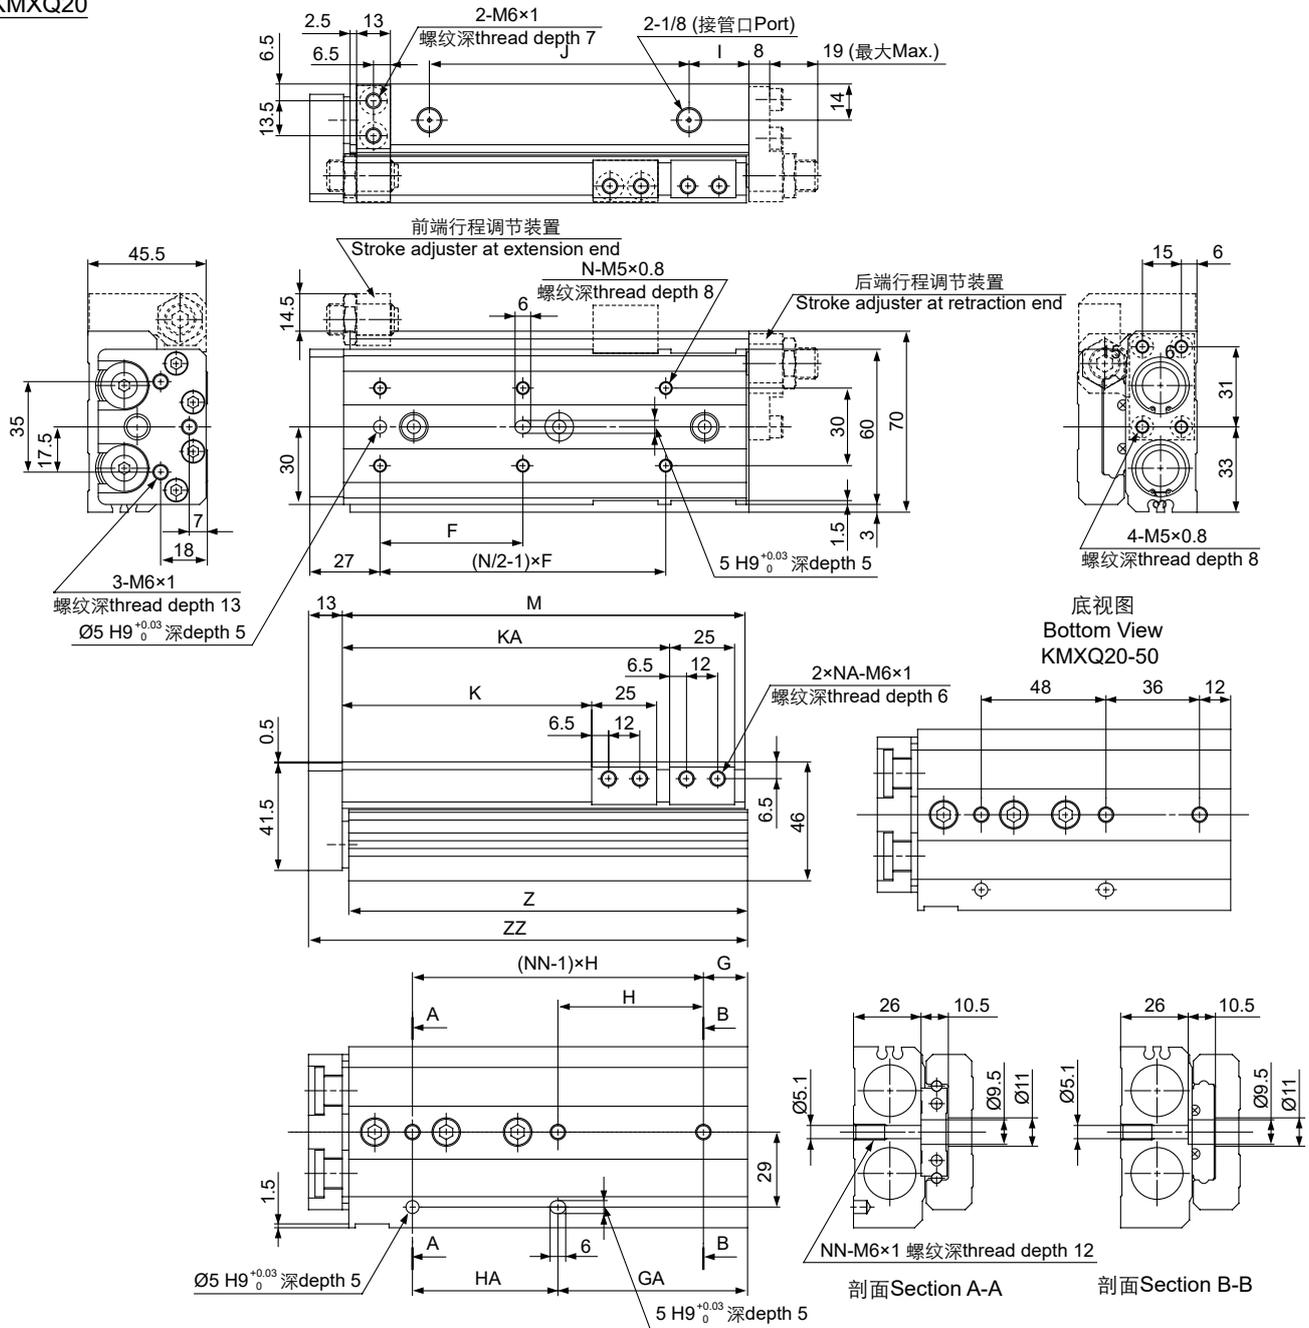


型号 Model	F	G	GA	H	HA	I	J	K	KA	M	N	NA	NN	Z	ZZ
KMXQ20-10	45	22	18	46	50	16	46	31	-	94	4	2	2	92.5	108
KMXQ20-20	40	22	18	46	50	16	46	41	-	94	4	2	2	92.5	108
KMXQ20-30	48	22	18	46	50	16	46	51	-	94	4	2	2	92.5	108
KMXQ20-40	58	22	22	56	56	16	56	61	-	104	4	2	2	102.5	118
KMXQ20-50	42	-	48	-	48	18	72	71	-	122	6	2	3	120.5	136
KMXQ20-75	55	17	73	56	56	23	100	96	126	155	6	4	3	153.5	169
KMXQ20-100	50	18	74	56	112	25	155	121	183	212	8	4	4	210.5	226
KMXQ20-125	55	37	96	59	118	18	190	146	211	240	8	4	4	238.5	254
KMXQ20-150	62	56	118	62	124	21	215	171	239	268	8	4	4	266.5	282

# 滑台气缸(循环直线导轨) Air Slide Table (Recirculating Linear Guide) Series **KMXQ**

外形尺寸图 Dimensions (mm)

KMXQ25

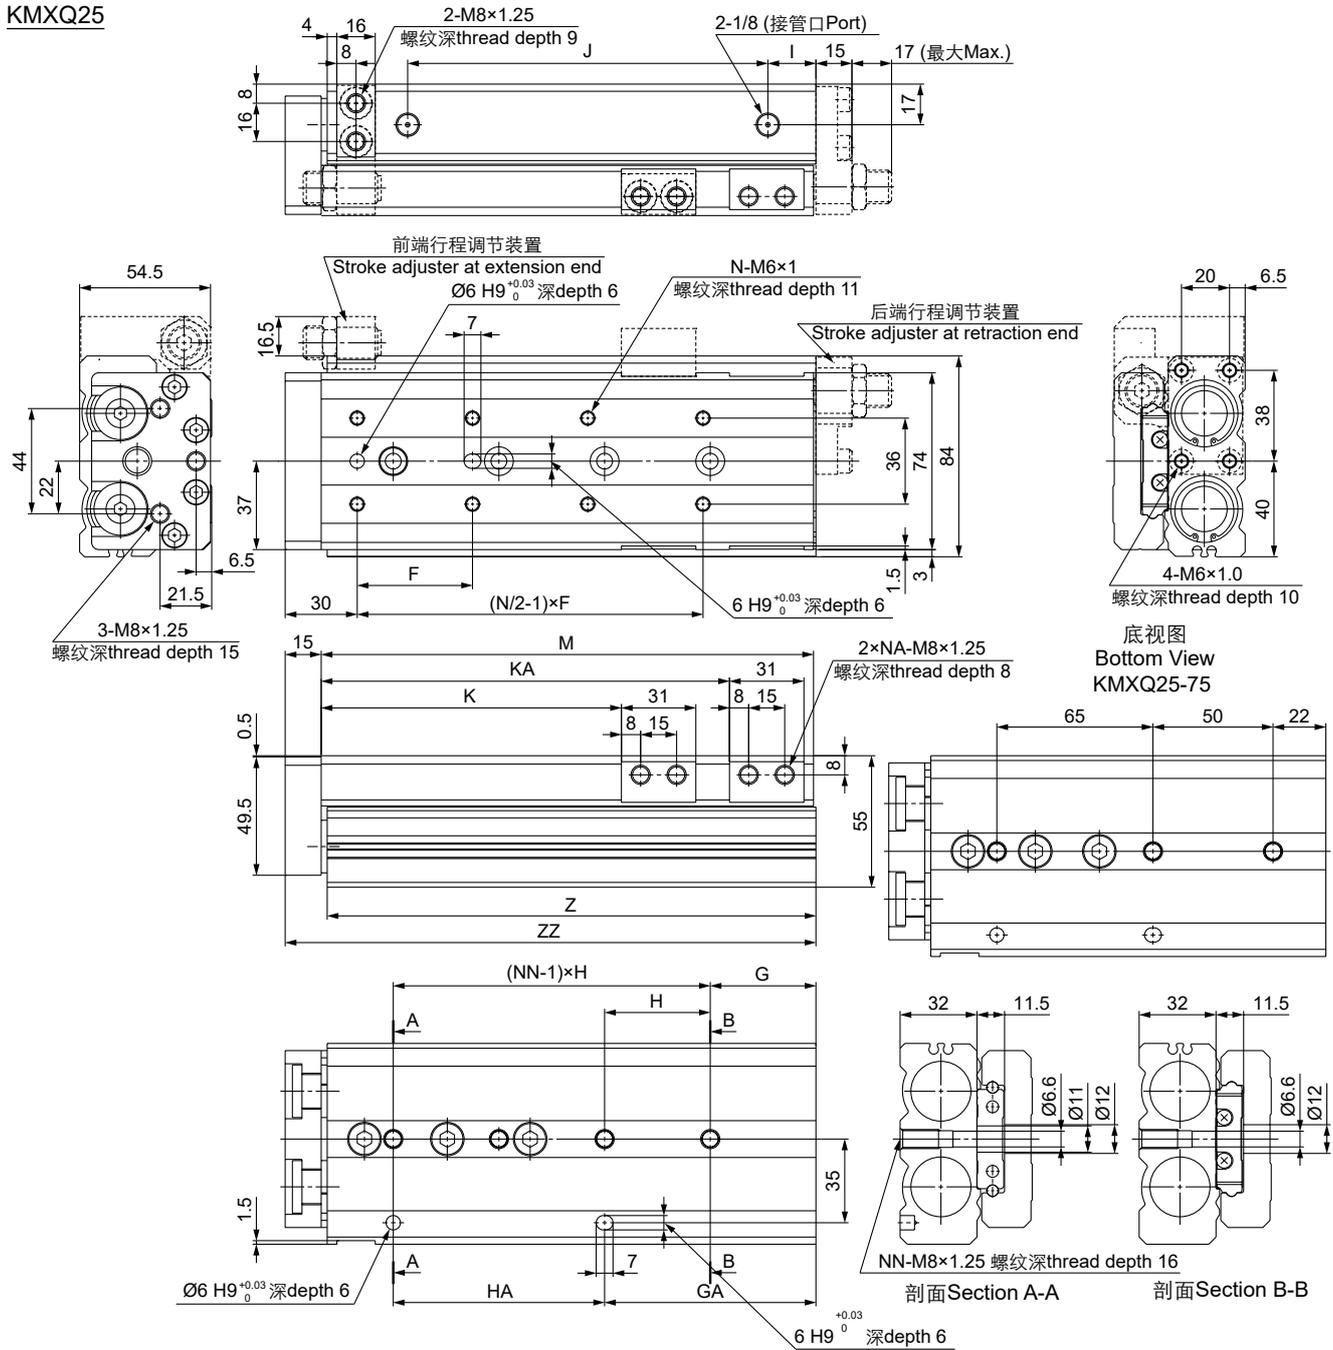

型号 Model	F	G	GA	H	HA	I	J	K	KA	M	N	NA	NN	Z	ZZ
KMXQ25-10	55	23	23	55	55	16	56	35	-	107	4	2	2	105.5	123
KMXQ25-20	46	23	23	55	55	16	56	45	-	107	4	2	2	105.5	123
KMXQ25-30	55	23	23	55	55	16	56	55	-	107	4	2	2	105.5	123
KMXQ25-40	65	23	23	65	65	16	66	65	-	117	4	2	2	115.5	133
KMXQ25-50	75	32	32	80	80	16	90	75	-	141	4	2	2	139.5	157
KMXQ25-75	60	-	72	-	65	31	100	100	-	166	6	2	3	164.5	182
KMXQ25-100	48	44	88	44	88	20	150	125	170	205	8	4	4	203.5	221
KMXQ25-125	60	31	97	66	132	18	205	150	223	258	8	4	4	256.5	274
KMXQ25-150	65	56	122	66	132	18	230	175	248	283	8	4	4	281.5	299