


ARK

5通气控阀
5-Port Air Operated Valve
Series KVFA3000



KVFA 3130-02

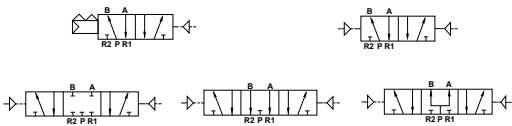

KVFA 3230-02

规格 Specifications

型号	Model	KVFA3130	KVFA3230	KVFA3230	KVFA3430	KVFA3530
接管口径	Port Size	PT1/4"				
气控孔口径	Pilot Port Size	PT1/8"				
使用流体	Fluid	洁净空气 Clean Air				
工作压力范围	Operating Pressure Range (MPa)	0.15~1.0		0.2~1.0		
有效截面积	Effective Sectional Area (mm²)	19.0		11.5		
环境及流体温度	Ambient & Fluid Temp.	5~60°C				
* 润滑	Lubrication	不需要 Not Required				

* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary.

型号表示方法 How To Order

KVFA3130-02

1

02

结构 Configuration

1 单线控 Single

2 双线控 Double

3 3位/中央封闭 Closed Center

4 3位/中央排气 Exhaust Center


5 3位/中央加压 Pressure Center

接管口径 Port Size


02 1/4"

5通气控阀 5-Port Air Operated Valve
Series KVFA3000
外形尺寸图 Dimensions (mm)

KVFA 3130-02

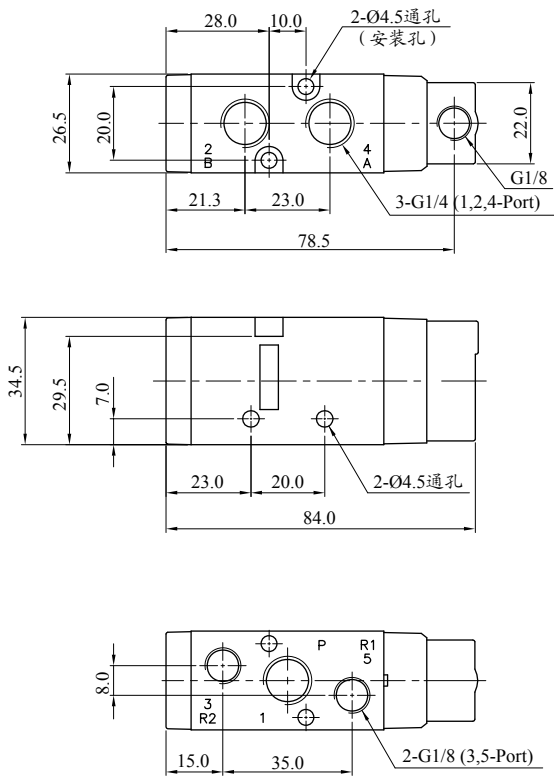

KVFA 3230-02

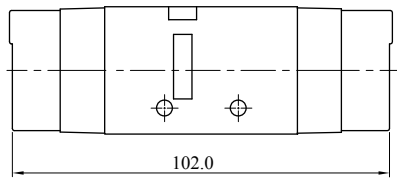

KVFA 3330-02
4
5

