


5通气控阀 5-Port Air Operated Valve Series KVFA6000

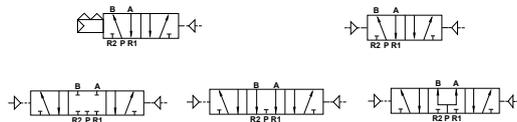

KVFA6120-04

规格 Specifications

型号	Model	KVFA6120	KVFA6220	KVFA6320	KVFA6420	KVFA6520
接管口径	Port Size	PT1/2"				
气控孔口径	Pilot Port Size	PT1/8"				
使用流体	Fluid	洁净空气 Clean Air				
工作压力范围	Operating Pressure Range (MPa)	0.15~1.0		0.2~1.0		
有效截面积	Effective Sectional Area (mm ²)	65.0		50.0		
环境及流体温度	Ambient & Fluid Temp.	5~60°C				
* 润滑	Lubrication	不需要 Not Required				

* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary.

型号表示方法 How To Order



- 结构 Configuration
- 1 单线控 Single
 - 2 双线控 Double
 - 3 3位/中央封闭 Closed Center
 - 4 3位/中央排气 Exhaust Center
 - 5 3位/中央加压 Pressure Center


接管口径 Port Size
04 1/2"

5通气控阀 5-Port Air Operated Valve


Series KVFA6000

外形尺寸图 Dimensions (mm)

KVFA 6120-04

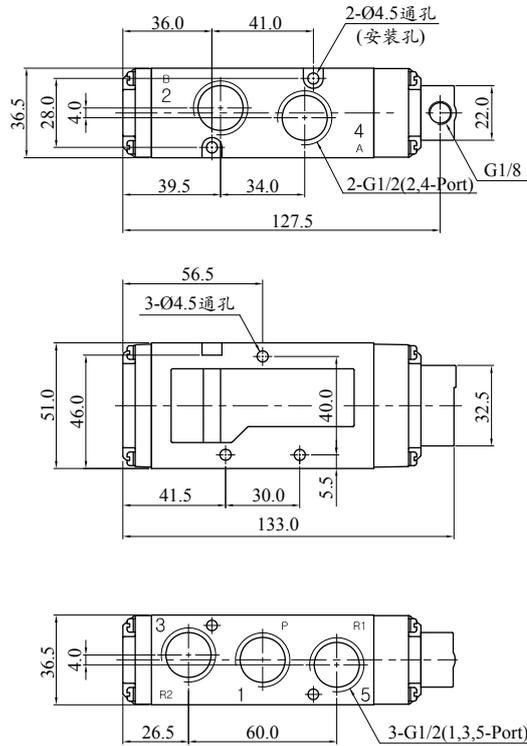

KVFA 6220-04

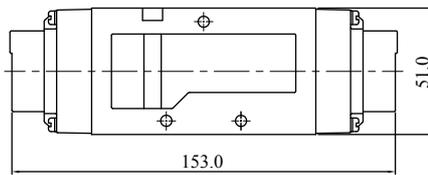

KVFA 6320-04

4
5

