


OMPHOBBY M1 直升机

Futaba 遥控器参数设置


1. 新建一个模型（所有参数保持初始化，油门反向保持 NORMAI）

Create a new model (remain initialized), all the parameter keep the same as initial, throttle keep normal

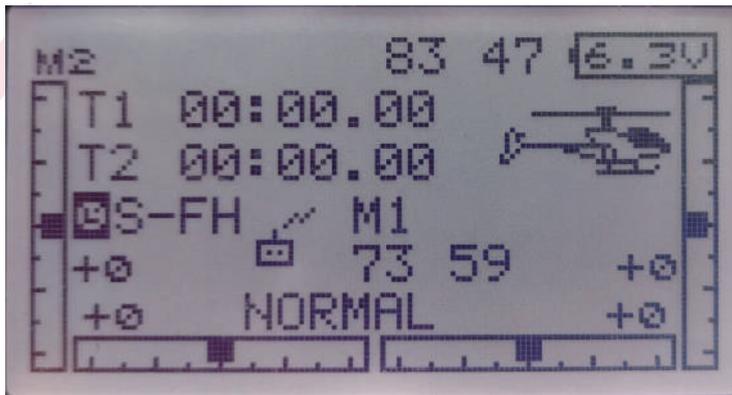

2. 类别设置成直升机

Set the category as helicopter

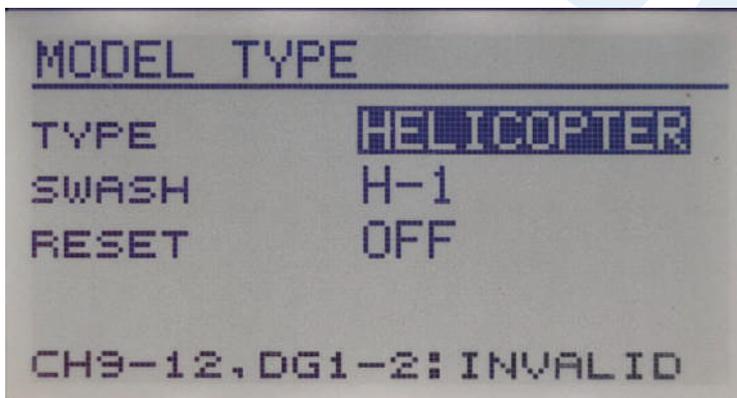

3.设置油门锁定 (HOLD)

Set throttle lock (HOLD)

CONDITION	NORMAL		1/3
▶NORMAL	OFF		
IDLEUP1	SE OFF		↓
IDLEUP2	SE OFF		↑ ↓
IDLEUP3	-- OFF		↑ ↓
HOLD	SF OFF		↑

4.设置 CH5 为起落架模式，设置开关用于控制姿态模式/3D 手动模式切换




Set CH5 as landing gear mode, and set the switch to control attitude mode / 3D manual mode switch

FUNCTION		1/3
CH:5	GEAR	
AILERON	: GEAR	
ELEVATOR	: PITCH	
THROTTLE	: GOVERNOR	
RUDDER	: GOVERNOR2	

FUNCTION	NORMAL		2/4
	CTRL	TRIM	
5 GEAR	SB	--	
6 PIT	J3	--	
7 GOV	--	--	
8 NDL	LS	--	


5. 设置油门曲线 NORMAL、IDLE 1\IDLE 2



Set throttle curve **Normal**、**IDLE 1****IDLE 2**

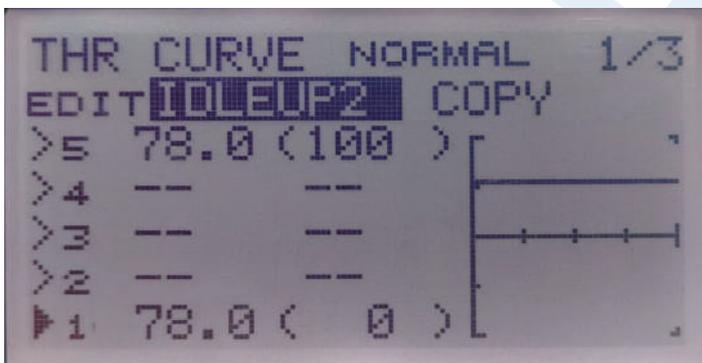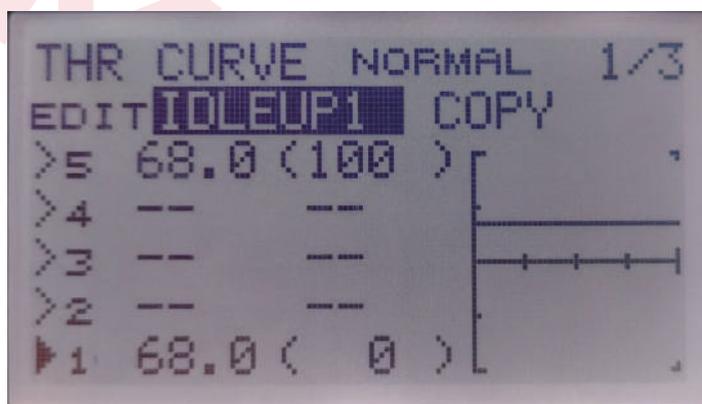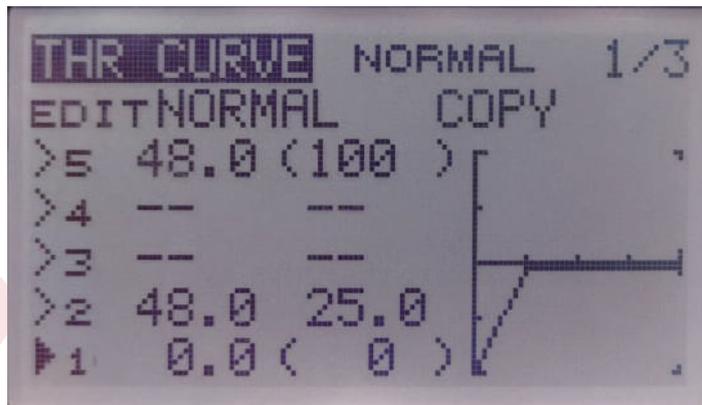

6. 设置螺距曲线 NORMAL、IDLE 1\IDLE 2

Set pitch curve **Normal**、**IDLE 1****IDLE 2**

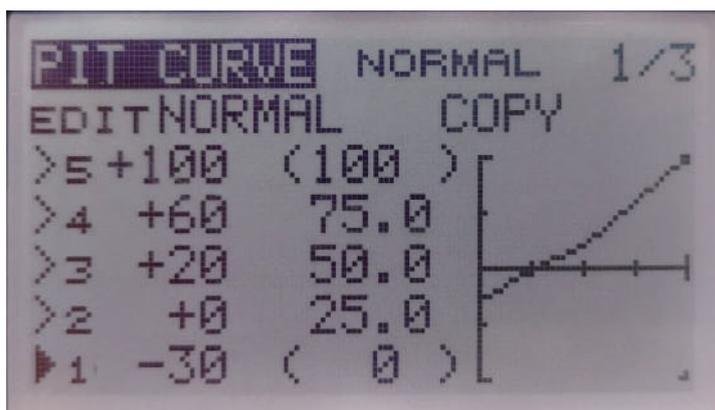

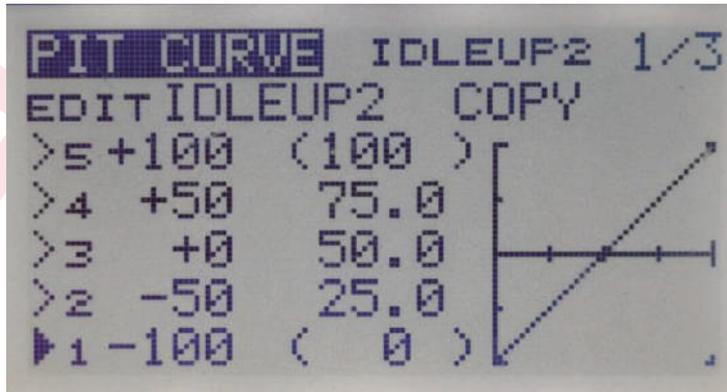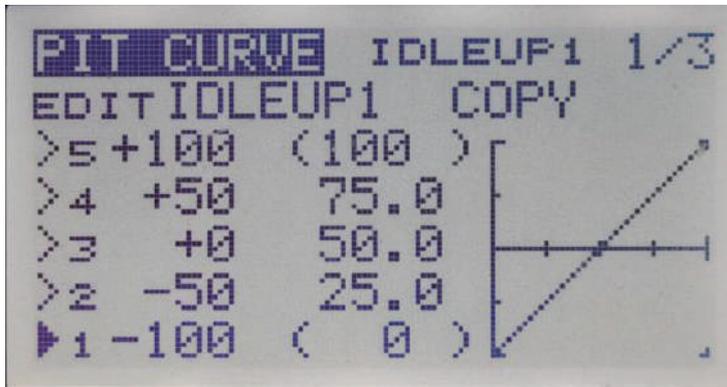

7. 遥控器与飞机绑定

(1) 打开遥控器, 插上飞机电池, 长按飞控上方对码按钮 3 秒, 等到飞控自检通过, 对码成功。

