

BSA1系列 Seris

小型大功率继电器 Small high power relay



专利证书:ZL 201220146043.7

产品特点

- 10A触点切换能力,产品类型结构为1A
10A Contact switching capability, The product type structure is 1A
- 超小型 (24×10×25) 标准印刷版引出脚
Subminiature(24×10×25)standard pinting plate lead out pin
- 塑封型和防焊剂型可选择
plastis sealing type and anti flux type are optional
- 选择耐高温环保材料, 更好的提高产品稳定性
Select high temperature resistant and environment-friendly materials to better improee the stability of products
- 符合REACH ROHS 指令,
Comply with reach RoHS Directive,
- BSA1系列产品浪涌电压为10000V
The surge voltage of BSA1 series products is 10000V

触点负载 Contact Rating	
触点形式 contact form	1A
触点材料 contact material	银合金 AgSnO ₂
额定负载(阻性) Rated load (Resistance)	10A 250VAC/30VDC 5A 250VAC/30VDC
最大切换电压 Max. switching Voltage	250VAC/30VDC
最大切换电流 Max. switching Current	10A
最大切换功率 Max.switching power	2500VA/300W
电耐久性 Electrical durability	5×10 ⁴ 次(10A/250VAC) 阻性, 室温1S ON/9S OFF
机械耐久性Mechanical	1×10 ⁷ 次 每小时10800次

备注: 备注: 1. 上述值为初始值
2. 对于塑封型产品试验时, 应打开外壳上的透气孔
1.remarks:The above values are initial values
2.When experimenting with plastic encapsulated products,the vent holes on the housing should be opened

安规认证 Safety certification

UL/CUL E332719	10A 250VAC
-------------------	------------

性能参数Performance Parameter		
绝缘电阻 Insulation resistance		500MΩ (500VDC)
吸合时间 (额定电压下) Operate Time		≤10ms
释放时间 (额定电压下) Release Time		≤5ms
介质耐压 Dielectric Strength	断开的触点间BOC	1000VAC 50/60Hz 1分钟
	触点与线圈间BCC	4500VAC 50/60Hz 1分钟
浪涌电压 (线圈与触点间) Surge voltage (BCC)		10KV (1.2/50us)
湿度 humidity		5%~85%RH
温度范围Temperature Range		-40℃~85℃ (不结冰) (NO freezing)
冲击Shock	稳定性 Error Operation	98m/s ²
	强度Endurance	980m/s ²
接触电阻 Contact Resistance		≤100mΩ (1A 6VDC)
振动vibration		10Hz~55Hz 1.5mm双振幅
线圈温升 Coil temperature rise		35℃ Max
重量Weight		约11克 about11g
封装方式Type of Sealing		卡扣式Plastic duct conver

典型用途 Typical use

- 空调、家用电器
- Air conditioning household appliances
- 汽车、加热器和通风装置
- Automobiles, heaters and ventilators

BSA1系列 Seris

小型大功率继电器
Small high power relay

线圈参数Coil Specification (at 23 °C)

线圈灵敏度 Coil sensitivity	额定电压 Nominal Voltage (VDC)	额定电流 Rated current (mA)	线圈电阻 Coil Resistance ($\Omega \pm 10\%$)	额定功率 Rated power (w)	吸合电压 Pull-In Voltage (Max)	释放电压 Drop-Out Voltage (Min)	最大电压 Maximum Voltage (Max)
BSA1-DM	5	108	46.2	约0.54W about	额定电压的 Rated voltage 75%	额定电压的 Rated voltage 10%	额定电压的 Rated voltage 130%
	6	90	66.6				
	9	60	150				
	12	45	266.6				
	24	22.5	1066				
	48	11.2	4266				
BSA1-LM	5	50	100	约0.25W about			
	6	41.7	144				
	9	27.8	324				
	12	20.8	576				
	24	10.4	2304				
	48	5.2	9216				

备注: 1. 上述值为初始值remarks:The above values are initial values

2. 最大电压是指继电器线圈在短时间内能够承受的最大值

The maximum voltage refers to the maximum value that the relay coil can withstand in a short time

订货标记Ordering Information

BSA1	-	S	-	1	12	D	M
							触点形式: M:常开型 Contact form: M: NO
							线圈功耗: L:高灵敏度直流线圈 D:标准直流线圈 Coil power: L:High sensitivity DC coil D:Standard DC coil
							线圈电压: 03:3V 05:5V,06:6V,09:9V Coil oltage: 12:12V,24:24V,48:48V
							触点组数:1:1 组 Numbe of pole:1:1-One pole
							密封方式: S:卡口式 Type of sealing: SS:Plastic duct cover
							品名: BSA1 Model: BSA1

- 备注:
- 在洁净环境（不含H2S、SO2、NO2、粉尘等污染物）下使用时，推荐使用防焊剂型产品
 - 在污染焊剂（含一定量的H2S、SO2、NO2粉尘等污染物）下使用时建议选用塑封产品，并请在实际使用中进行确
 - 当继电器装入PCB版焊接后，如需进行整体清洗或表面处理，请与我司联系，以便商定合适的焊接条件、合格的产品规格。

remarks:

- (1)When using in clean enbironment (without H2S SO2 NO2 dust and other pollutants), it is recommended to Use flux resistant products. When using in polluted environ ment(with a certain amount of H2S SO2 NO2dust and other pollutants), it is recom mended to use plastic encapsulated products.please confirm in actual use.
- (2)After the relay is installed into the PCB board for welding, if it needs overall cleaning or surface treatment, please Contact me to negotiate the appropriate welding conditions and product specifications.


类别 category

型号 model	BSA1	
线圈灵敏度 Coil sensitivity	标准直流线圈 Standard DC coil	高灵敏度直流线圈 High sensitivity DC coil
	1A	1A
卡扣型 Snap type	BSA1-S-1□□DM	BSA1-S-1□□LM


外形尺寸、接线、安装孔位图

Overall dimension, wiring and installation hole bitmap


外形尺寸 Outline Dimensions

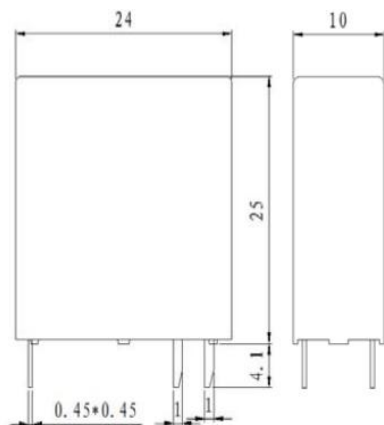

安装孔位图(底视图)
PCB Layout (Bottom view)

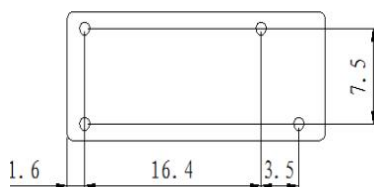

接线图(底视图)
Wiring Diagram
(Bottom view)




备注:

1. 产品外形图的引脚标注尺寸为沾锡前尺寸（沾锡后会变大），安装孔尺寸为推荐的PCB板孔的设计尺寸，具体PCB板孔设计尺寸可根据产品实物进行测绘、调整。
2. 产品部分外形尺寸未注尺寸公差，当外形尺寸 $\leq 1\text{mm}$ ，公差为 $\pm 0.2\text{mm}$ ；当外形尺寸在 $(1\sim 5)\text{mm}$ 之间时，公差为 $\pm 0.3\text{mm}$ ；当外形尺寸 $> 5\text{mm}$ ，公差为 $\pm 0.4\text{mm}$
3. 安装孔尺寸中未注尺寸公差为 $\pm 0.1\text{mm}$

DISCLAIMER:

1. The pin dimension in the outline drawing or the product is the dimension before dipping tin (it gets bigger when stained with tin) The size of mounting hole is the recommended design size of PCB hole The specific PCB hole design size can be mapped and adjusted according to the actual product
2. The overall dimension of the product if not marked with dimensional tolerance, when the overall dimension $\leq 1\text{mm}$ Tolerance is $\pm 0.2\text{mm}$ When the overall dimension is $(1\sim 5)\text{mm}$ Between Tolerance is $\pm 0.3\text{mm}$ When the overall dimension $> 5\text{mm}$, Tolerance is $\pm 0.4\text{mm}$
3. The dimension tolerance of mounting hole without dimension injection is $\pm 0.1\text{mm}$

性能曲线图 Performance Curve

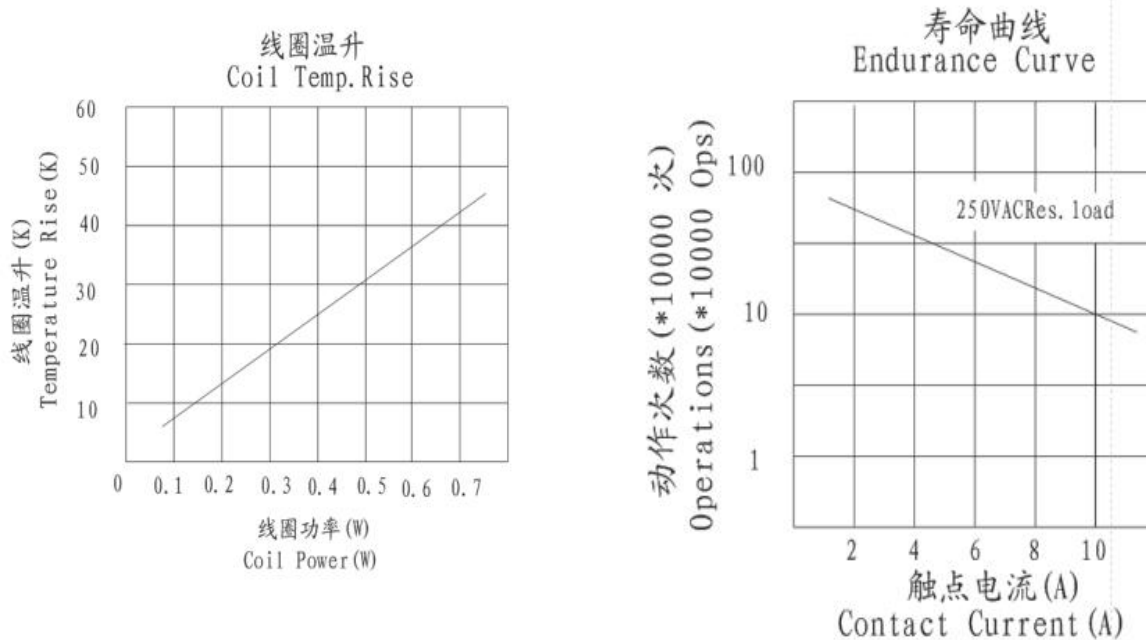

备注:

本产品规格书仅供客户使用时参考，若有更改，恕不另行通知。

对科信而言，不可能评定继电器在每个具体应用领域的所有性能参数要求，因而客户应该根据具体的使用条件，选择与之相匹配的产品。若有疑问，请与科信联系 以便获取更多的技术支持。但产品选型责任仅由客户负责。

DISCLAIMER:

This product specification is for reference only and subject to change without prior notice.

For AFE, it is not possible to assess all performance requirements for relays in each specific application area and therefore the customer should select a suitable product for each specific application, please contact AFE for additional technical support. But the responsibility of product selection is only the responsibility of the customer.