


JE19Q.1.F 系列 - 桥式方便型


Series of JE19Q.1.F Bridge type Convenient type

JFLO®

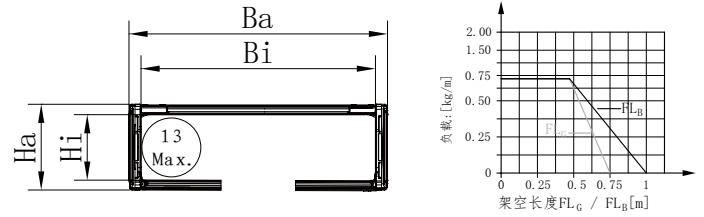

◎ 适用于直径 13 毫米以下线缆 Suitable for 13mm or less of cable.

主要技术参数 Basic technical data

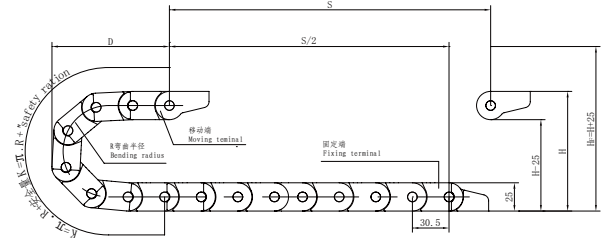


节距=30.5mm, 每米节数=33, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=30.5mm, link per meter=33, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	28	38	48	75	100
H	81	101	121	175	225
D	71	81	91	118	143
K	153	183	214	305	397

安装实际高度:H_F=H+25mm(负载 0.1kg/0.5m)

Actual mounting height:H_F=H+25mm(load 0.1kg/0.5m)

示意图 Drawing

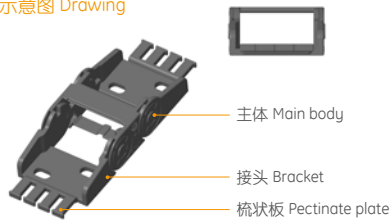


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type		孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
										A	B	C	D	E	F	
JE19Q.1.25F	18.5	25	25	36	方便型 外侧开口	28,38,48, 75,100	X ₆		6.5*10.5L	14	10	38		7		JE19Q.1.25F-XJT


注: F 表示方便型 Note: F indicates that the Convenient type

单位 (unit): mm

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



X₆ 型接头 X₆ type bracket

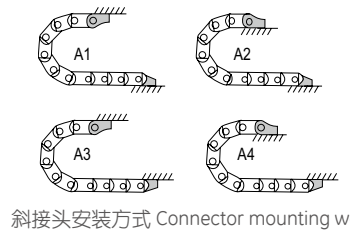

斜接头安装方式 Connector mounting way



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092

订货示例 Order Example

示例 拖链内高 18.5mm、内宽 25mm、半径 28mm、长度 1 米 /50 节 (Sample: inner height 11mm, inner width 10.2mm, radius 18mm, length 50 links/1 meter)

拖链 Chain JE19Q.1.10F R28 1000mm /50 Links

接头 Bracket JE19Q.1.10F-XJT 1 副 (Set)

配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.